

SPECIFICATIONS (XL-MI-G-PL-1150)


1. 4" inlet/outlet Sch. 40 (No-Hub)
2. Max flow rate: 100 GPM
3. Liquid capacity: 300 Gallons
4. Max grease capacity: 1,150 lbs. (157.50 Gallons)
5. Max solids/sediment capacity: 105 Gallons
6. Unit weight w/std. covers: 275 lbs.
7. H-20, 20,000 lb. load rated, bolted, gas/water tight composite covers.
8. Maximum operating temperature 190° F continuous.

OPTIONAL VARIATIONS		
SUFFIX	DESCRIPTION	MODEL NO.
-AK	High water anchor kit (set of four) - for 100 GPM HDPE int.	XL-MI-PL-1150-AK-SET
-C	"Lid extension (specify ""C"" dimension req.) - for 100 GPM (This is up to a 44"" high extension system)"	"MI-EXT-PL-44 (2 pcs req.)"
-C+	"Lid extension from 44"" to 72"" (specify ""C"" dimension req.) For 100 GPM HDPE Interceptors. Per inch price."	(2 pcs req.)
-CL	"Hold down brackets for lid (when installed above ground) For 100 GPM HDPE Interceptors "	"XL-MI-G-PL-PCL (2 pcs req.)"
-DCL	"Direct Connect Lid For 100 GPM HDPE Interceptors "	XL-MI-PL-DCL (2 pcs req.)
-DI	Ductile Iron lid and collar - for 100 GPM HDPE Int,	"XL-MI-G-0-PL4 (2 pcs req.)"
-DP	Dosing pump	XL-MI-PL-DP
-EP	Enzyme port	XL-MI-PL-EP
-FL-C	Membrane clamp kit	XL-MI-PL-FLC
-HLA	High level alarm	XL-MI-PL-HLA
-LHSI	4" no hub inlet on left hand side	MI-G-PL-PF4
-LHSO	4" no hub outlet on left hand side	MI-G-PL-PF4
-OP	Internal flow control (does not meet PDI Standards)	
-RHSI	4" no hub inlet on right hand side	MI-G-PL-PF4
-RHSO	4" no hub outlet on right hand side	MI-G-PL-PF4
-SB	Sediment bucket - for 100 GPM HDPE Int.	XL-MI-G-PL-1150-PSB
-SP	External Sampling port	XL-MI-G-PL-SP
-SP-OF	External Sampling port - offset	XL-MI-G-PL-SP-OF
-T	Female threaded conn-(for each piece-2 pcs req. per int.)	"XL-MI-G-PL-PF(*)-FT (*) Specify Conn. Size"
6	6" no hub inlet + outlet-(for each piece-2 pcs req. per int.)	MI-G-PL-PF6

SIGNATURE OF APPROVAL: _____

COMPANY: _____

DATE OF APPROVAL: _____

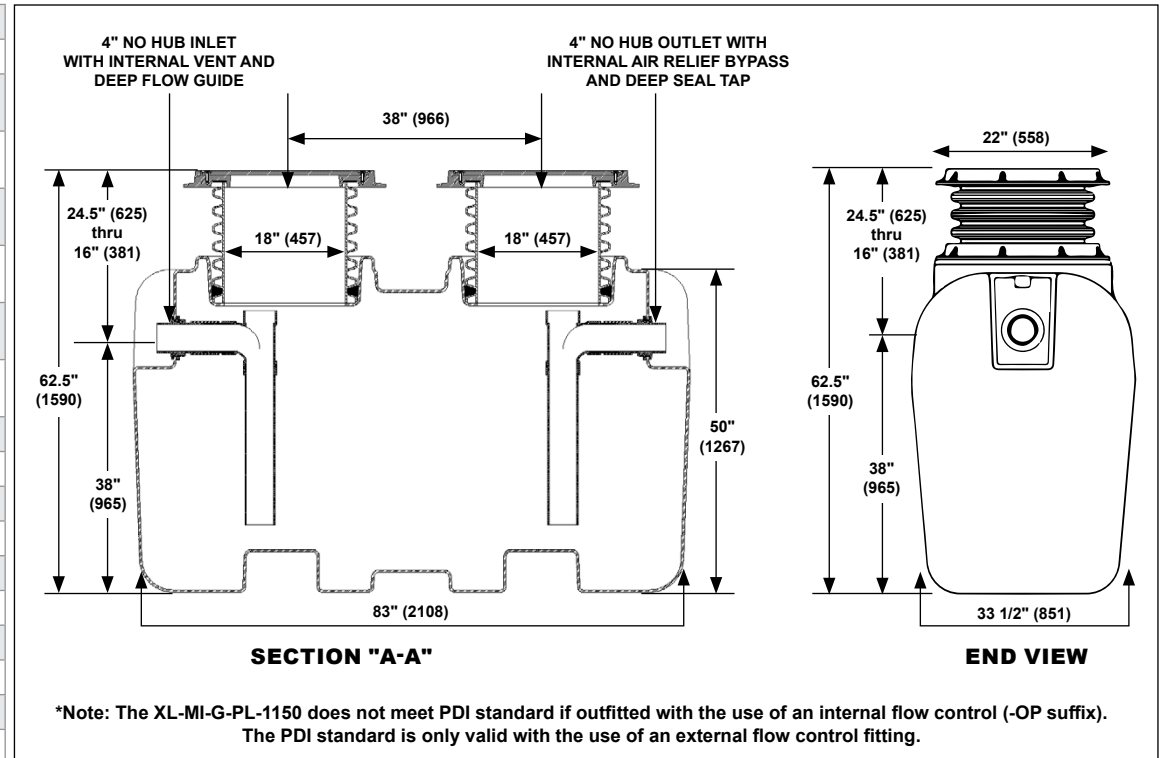

The XL-MI-G-PL-1150 is tested and certified to the following standards: PDI-G-101, ASME A112.14.3, CSA B481.1 and is listed with IAPMO.

PART NUMBER: XL-MI-G-PL-1150

DESCRIPTION:
MIFAB® Big Max Series high density polyethylene (H.D.P.E.) grease interceptor, 100 GPM, 300 liquid gallons, 1,150 grease pounds capacity.



MIFAB, Inc. 1321 West 119th Street, Chicago, Illinois 60643-5109, USA
Toll Free 1-800-465-2736 • Fax 1-773-341-3049
www.mifab.com • sales@mifab.com • Canada Toll Free: 1-800-387-3880