

Location: \_\_\_\_\_




**F1100-C-PET**

**PET RELIEF PODIUM SYSTEM**

**Specification:** MIFAB® Series F1100-C-PET lacquered cast iron pet relief podium system floor drain with anchor flange, cast iron podium drain membrane clamp ring raised  $\frac{3}{4}$ " to accept drainboard, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard reinforced, (specify diameter), satin finished nickel bronze strainer.

**Function:** Similar to a planter, a pet relief area requires the use of a secondary drain body and has a strainer installed at grade to adequately accept runoff areas during storm situations into the drain body and not across the podium. MIFAB's podium system allows full unrestricted flow of water off the drain board into the sump of our drain body while properly securing the membrane around the entire body (not just at some anchor points) – providing 100% of clamping of the membrane around the circumference of the drain opening. The installer typically has the option of trimming out the strainer to finish grade or below the pavers per the illustration above.

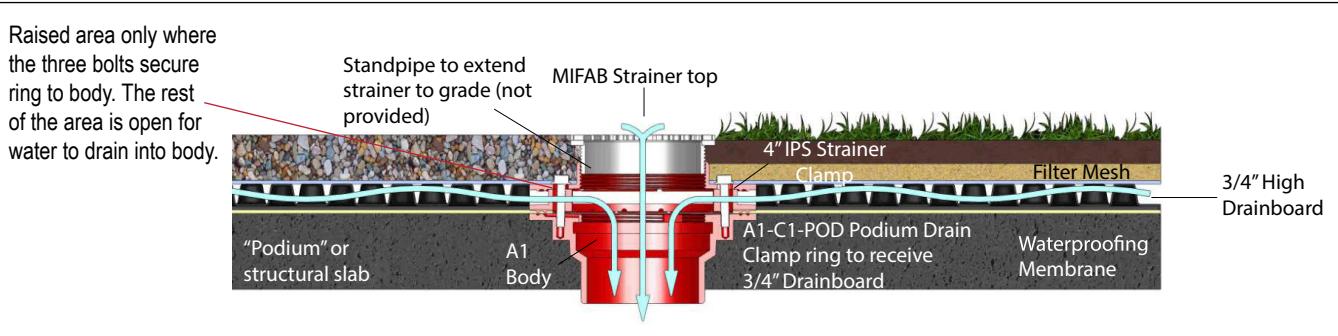

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT					
	MIN	MAX	FREE AREA	LOAD RATING		N.B. (-1) Lbs.	S.S. (-3) Lbs.	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)
5" (127)	1/2" (13)	1 1/2" (38)	8 in <sup>2</sup> (5200 <sup>2</sup> )	Up To 2000	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6" (152)	11/16" (17)	1 1/2" (38)	9 in <sup>2</sup> (5800 <sup>2</sup> )	Up To 2000	5000 to 7499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
7" (178)	9/16" (14)	1 9/16" (40)	12 in <sup>2</sup> (7700 <sup>2</sup> )	Up To 2000	5000 to 7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8" (203)	1 1/16" (17)	2 1/4" (57)	18 in <sup>2</sup> (16000 <sup>2</sup> )	Up To 2000	5000 to 7499	5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
10" (254)	1 1/16" (17)	2 1/4" (57)	26 in <sup>2</sup> (17170 <sup>2</sup> )	Up To 2000	5000 to 7499	6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX	OPTIONAL VARIATIONS
-1	Nickel bronze strainer (standard)
-2	Polished brass strainer (5" only)
-3	Stainless steel strainer
-4	Ductile iron strainer (5", 8" only)
-5	Sediment bucket
-6	Security screws (T-20 Torx & pin)
-7	1/2" trap seal primer connection
-8	Backwater valve (2", 3", 4")
-11	Acid resistant epoxycoated body
-13	Galvanized body
-15	Extension
-21	Secondary flat stainless steel strainer (2", 3", 4")
-28	Stainless steel body (Type 304)
-30	PVC socket connection body
-31	ABS socket connection body
-34	Closure plug
-40	Underdeck clamp Sump receiver

<b>-41</b>	Chrome plated strainer
<b>-50</b>	Lacquered cast iron funnel
<b>-90</b>	Threaded side outlet (2", 3", 4")
<b>-90NH</b>	No hub side outlet (2", 3", 4")
<b>-95</b>	Client logo
<b>-BA</b>	Buy American Act compliant product
<b>-F4</b>	4" Round funnel
<b>-F6</b>	6" Round funnel
<b>(Standard)</b>	No hub outlet
<b>-G</b>	Oval 4" x 9" funnel
<b>-HP</b>	Heel proof grate (1/4" maximum grate opening size, 5-1 or -3 only)
<b>-J</b>	6" x 3" x 1" funnel
<b>P</b>	Push on outlet
<b>-PA</b>	Pennsylvania Steel Act compliant product
<b>T</b>	Threaded outlet (2", 3", 4")
<b>X</b>	Inside caulk outlet
<b>-Z</b>	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_