


F1170-C

FLOOR DRAIN WITH MULTI INLETS, ROUND STRAINER AND INTEGRAL TRAP

Specification: MIFAB® Series F1170-C lacquered cast iron body and anchor flange, weepholes, 3" or 4" no hub side outlet, integral deep seal trap with cleanout plug and adjustable (specify material finish) strainer with T-20 torx and pin security screws. (Specify -44, 2" (51) no hub inlets as shown and required. Maximum three @ 90 degrees. Specify location -A, B, or C.)

Function: Used in toilets, kitchens and other membrane finished areas where additional inlets are required to receive drainage. Integral deep seal trap prevents sewer gas from entering area.

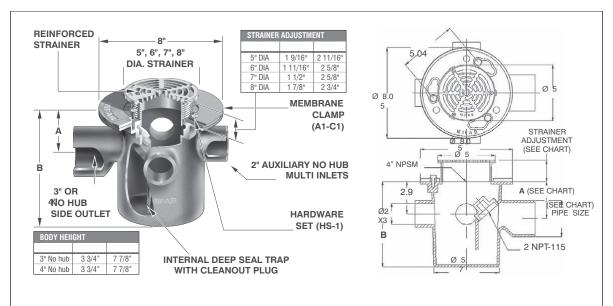

F1170 BODY
(*)-(**)







(*) Denotes strainer size (5, 6, 7 or 8) (**) Denotes strainer) finish (-1 or -3

MODEL NUMBER	OUTLE	T SIZE	WT. LBS.	STRAINER ADJUSTMENT
F1173, 4-C-5	3"	4"	21.00	5" DIA
F1173, 4-C-6	3"	4"	21.50	6" DIA
F1173, 4-C-7	3"	4"	22.00	7" DIA
F1173, 4-C-8	3"	4"	23.00	8" DIA

SUFFIX OPTIONAL VARIATIONS

- Nickel bronze strainer and cover
- -3 Stainless steel strainer
- Ductile iron grate (5" x 8" only) (standard)
- -4 -5 Sediment bucket
- Security screws (T-20 Torx & pin)
- -6 -7 1/2" trap seal primer connection
- -8 Backwater valve (2", 3", 4")
- -11 Acid resistant epoxy coated body -13 Galvanized body
- -15 Extension
- -34 Closure plug
- 2" (51) no hub inlet (specify A, B, C locations)
- Lacquered cast iron funnel

SUFFIX OPTIONAL VARIATIONS

- Client logo Buy American Act compliant product -BA
- High rough-in membrane clamp (min. 1 9/16" 40)) -C2
- 4" Round funnel -F4
- 6" Round funnel -F6
- Oval 4" x 9" funnel -G
- Heel proof grate (1/4" maximum grate opening size, -3 only) -HP
- 6" x 3" x 1" funnel
- -MG MI-GARD Floor Drain Trap Seal (2", 3" or 4")
- Pennsylvania Steel Act compliant product -PA -7 Extended wide elastomeric flange

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880