

Location: _____




R150

CAST IRON COMBINED ROOF DRAIN WITH ALUMINUM DOMES AND OVERFLOW STANDPIPE

Specification: MIFAB Series R150 combined roof drain and secondary overflow system, consisting of one piece lacquered cast iron drain body with integral sump receiver, cast iron waterproofing membrane clamp rings with integral gravel stops, one 2 1/2" (64) high integral cast iron overflow standpipe and two self-locking metal dome strainers with a free area of 43 square inches each.

Function: Used in any type of conventional or flat roofs where a safety overflow, which receives water only when the accumulation is greater than the height of the standpipe is required to be located beside a standard roof drain. The standpipe can be adjusted to attain the desired overflow water depth. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

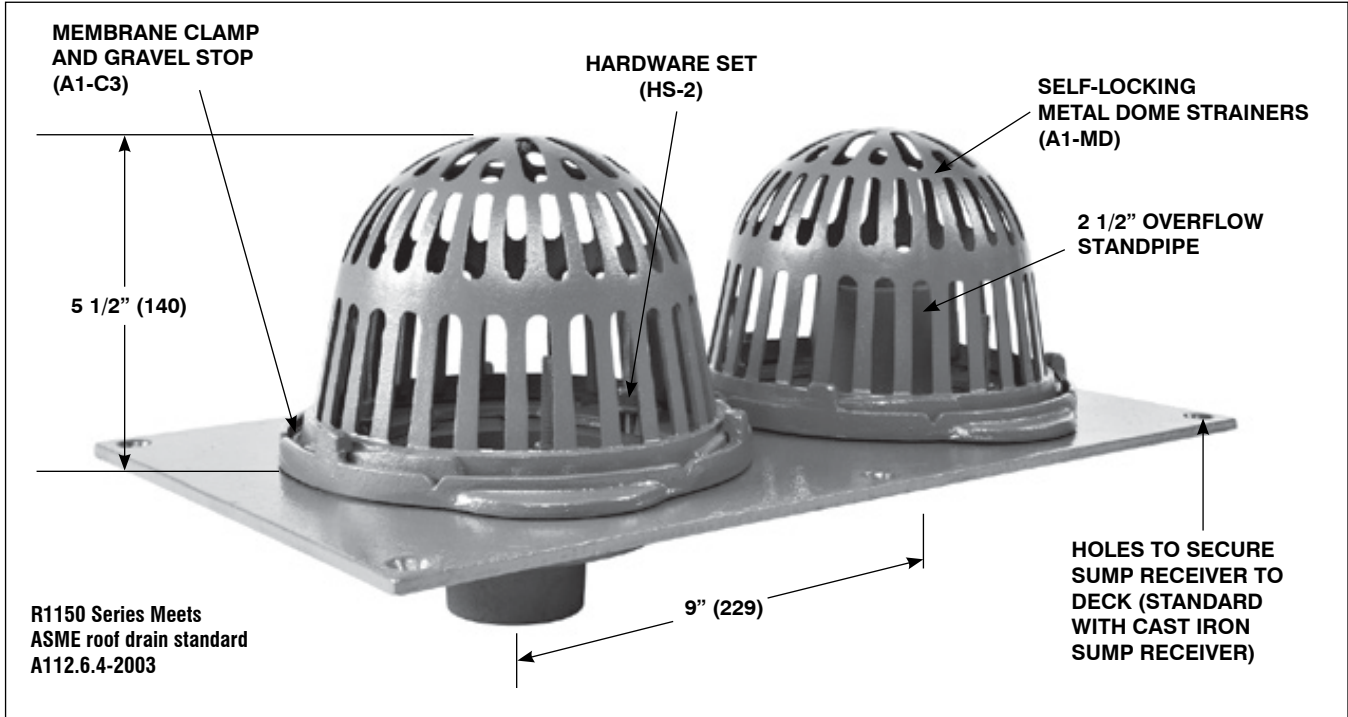

Model Number	Outlet Size	Outlet Type	Body Height
R152	2"	No Hub	3" (76)
R153	3"	No Hub	3" (76)
R154	4"	No Hub	3" (76)

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contract: _____
 Purchase Order No: _____