

Location: _____




F1650-G

FLUSHING RIM FLOOR DRAIN WITH FLUSHING CONNECTION AND DEEP SEAL TRAP

Specification: MIFAB® Series F1650-G flushing rim floor drain with white epoxy coated interior and exterior cast iron body, double wall deep seal trap with flushing connection, 3/4" (19) N.P.T. flushing connection in top assembly, anchor flange, membrane clamp, and stain finished (specify material finish) hinged grate and frame with stainless steel allen key vandal proof screws.

Function: Used in hospital operating and veterinary rooms, industrial and educational laboratories where waste must be drained to the sewer. Appropriate for mental institutions, zoos and prisons as drain type water closets.

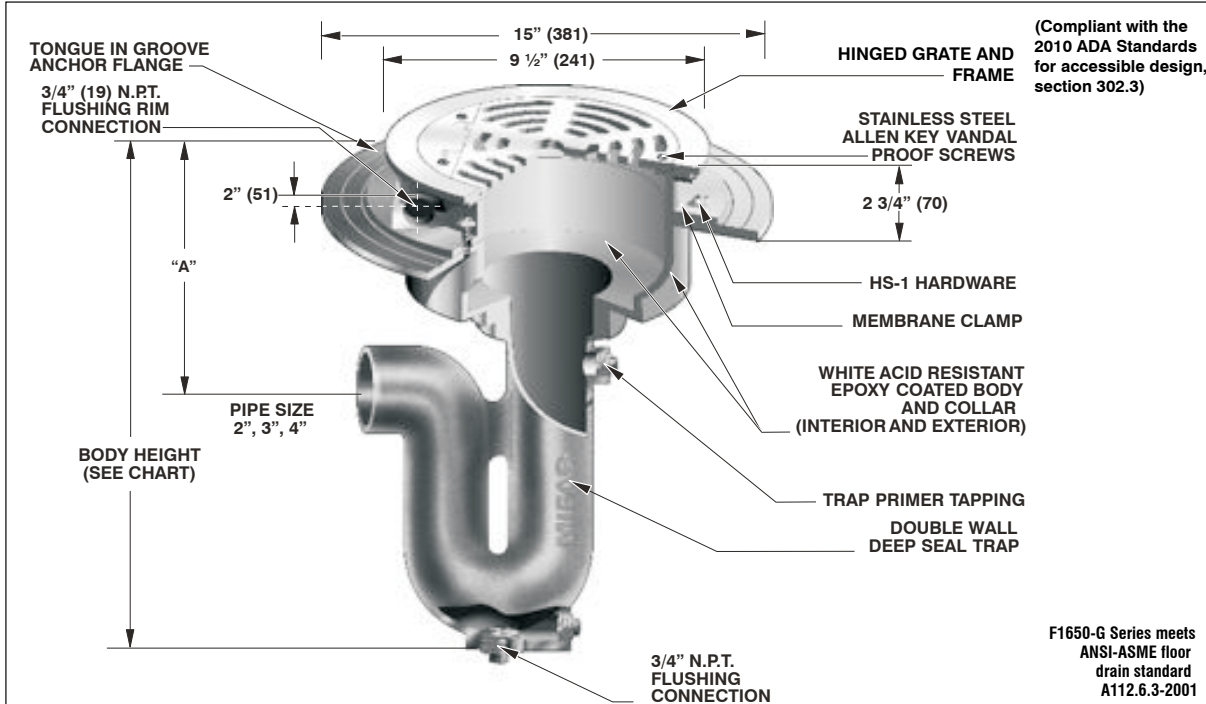

Note: See F1670 for water supply control box to be used with the flushing rim floor drain. Use a vacuum breaker between the potable water supply and the connection to the flushing rim connection (by others).

| STRAINER DIAMETER | ANSI/ASME RATING | | | PIPE SIZE | BODY HEIGHT | | | | |
|-------------------|--|---------------------|------------------------|-----------|-------------------|--------------|---------------|------------------|---------------------|
| | FREE AREA | LOAD RATING | | | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| | | N.B. (-1) | S.S. (-3) | | | | | | |
| 9" (229) | 18 in ² (11,613 ²) | UP TO 2,000 LBS. | 2,000 TO 4,999 LBS. | 2" (51) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 1/8" (181) |
| | | | | 3" (76) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| | | | | 4" (102) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| | | | | 5" (127) | 6" (152) | — | 5 7/16" (138) | 6 1/4" (159) | — |
| | | | | 6" (152) | 7 1/4" (184) | 7" (178) | 7" (178) | 6 1/4" (159) | — |

| SUFFIX | OPTIONAL VARIATIONS |
|--------|--|
| -1 | Nickel bronze frame and grate |
| -3 | Stainless steel frame and grate |
| -5 | Sediment bucket |
| -6 | Security screws (T-20 Torx & pin) |
| -13 | Galvanized body |
| -21 | Secondary flat stainless steel strainer (2", 3", 4") |
| -25-1 | Nickel bronze hinged solid cover |
| -28 | Stainless steel body (Type 304) |
| -30 | PVC socket connection body |
| -31 | ABS socket connection body |
| -34 | Closure plug |
| -40 | Underdeck clamp |
| -41 | Sump receiver |

| SUFFIX | OPTIONAL VARIATIONS |
|------------|---|
| -90 | Threaded side outlet (2", 3", 4") |
| -90NH | No hub side outlet (2", 3", 4") |
| -95 | Client logo |
| -BA | Buy American Act compliant product |
| -HP | Heel proof grate (1/4" maximum grate opening size, -3 only) |
| (Standard) | No hub outlet |
| -MG | MI-GARD Floor Drain Trap Sealer (2", 3" or 4") |
| P | Push on outlet |
| -PA | Pennsylvania Steel Act compliant product |
| T | Threaded outlet (2", 3", 4") |
| X | Inside caulk outlet |
| -Z | Extended wide elastomeric flange |

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____