

Location: _____




MI-TSP-NPB

TRAP SEAL PRIMER


Specification: MIFAB® Series MI-TSP-1-NPB brass trap seal primer with removable poppet, integral vacuum breaker, gasketed access cover, ½" (13) sweat connection adapters and ½" (13) N.P.T. drip line connection.

Specification: MIFAB® Series MI-TSP-2-NPB brass trap seal primer with removable poppet, integral vacuum breaker, gasketed access cover, ½" (13) N.P.T. inlet and outlet connections, and ½" (13) N.P.T. drip line connection.


MI-TSP-1-NPB

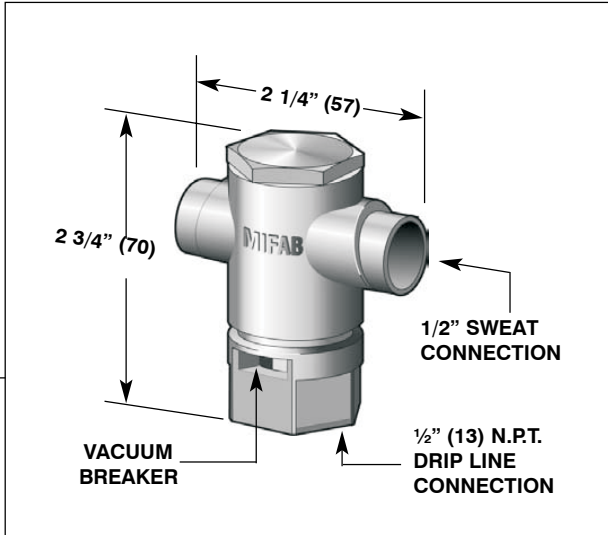

MI-TSP-2-NPB

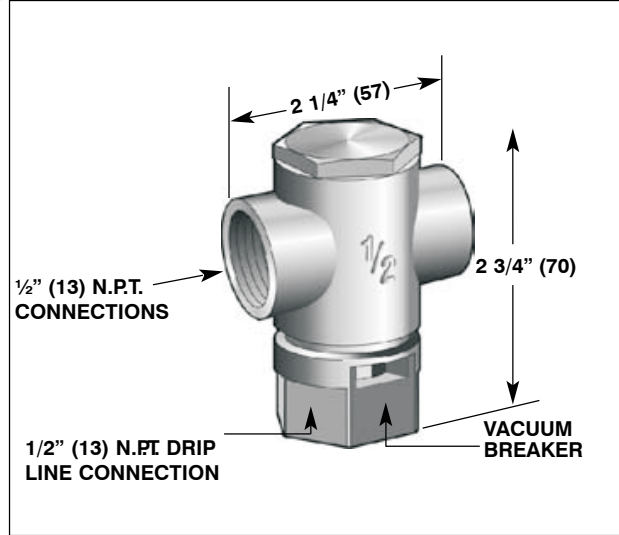

MI-TSP-3-NPB

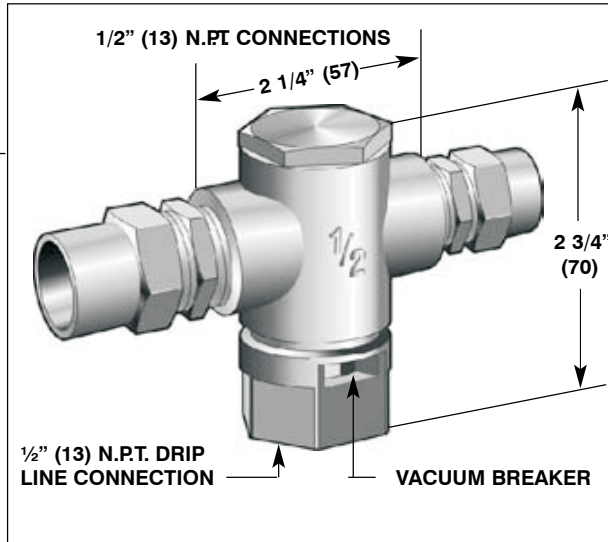

Specification: MIFAB® Series MI-TSP-3-NPB brass trap seal primer with removable poppet, integral vacuum breaker, gasketed access cover, ½" (13) N.P.T. inlet and outlet connections, complete with ½" (13) sweat connection adapters and ½" (13) N.P.T. drip line connection.

Function: Trap seal primers are a necessity in areas where drains are infrequently used. The MIFAB MI-TSP Series of trap seal primers are designed to maintain trap seals. The trap seal primer is installed in the cold water supply line to any fixture in order to provide intermittent water supply to a floor drain trap to maintain the trap seal. The opening of the valve in a horizontal supply line will cause the poppet to rise from its seat and allow a metered amount of water to enter the trap supply line. The closing of the valve will cause the poppet to reseat. Slots on each side of the trap seal primer offer visual inspection of water flow from the trap seal primer to the trap and acts as a vacuum breaker. Trap seal primers should be installed a minimum of 12" (305) above the grid of a floor drain or flood level rim of equipment served. The operating range for all of MIFAB's MI-TSP series of trap seal primers is 20 to 125 p.s.i.

Plumbing and Drainage
Mechanical Section

SUFFIX	OPTIONAL VARIATIONS
-CP	Polished chrome plated
-RK	Repair kit (Rubber poppet and brass seat)



MIFAB's MI-TSP-1-NPB, MI-TSP-2-NPB and MI-TSP-3-NPB trap seal primers are listed with I.A.P.M.O. and C.S.A. and are tested and certified to the A.S.S.E. Standard 1018.

(Dimension) Denotes Millimetres

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____