

Location: _____




R1100

ROOF DRAIN

Specification: MIFAB® Series R1100 lacquered cast iron roof drain with anchor flange, cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 43 square inches.

Function: Used in any type of flat roofs and gutters. 8" diameter body is ideal for applications with limited space. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

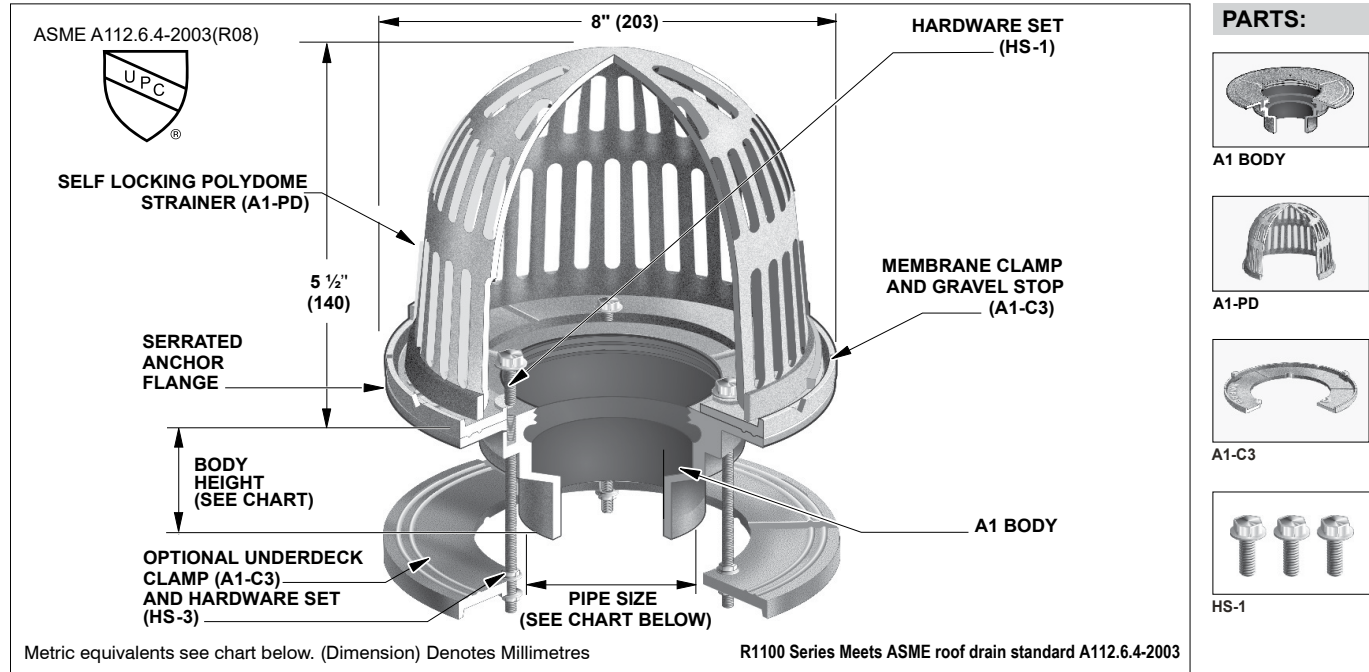

Note: Deck opening - 6 3/8" (162) with sump receiver - 8 1/2" (216)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 5/8" (67)
3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 1/4" (83)
4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 1/2" (89)

Note: See the MIFAB R1200 or R1220 Series for 6" outlet connection roof drains.

Suffix	Description		
-6	Vandal proof dome (metal dome only)	-E	Adjustable extension
-11	Acid resistant epoxy coating	-EG	Galvanized Adjustable extension
-12	Galvanized metal dome	-F1, -F2, -F3	Accuflow (parabolic weir) specify
-12A	Galvanized body and membrane clamp	-G	Stainless steel ballast guard
-13	Galvanized body, membrane clamp and dome	-JC	S.S. ballast guard with secondary clamp
-14	Flat grate (replaces dome strainer)	-M	Metal dome
-28	Stainless steel body (Type 304) (2", 3", 4")	P	Push on outlet
-29	Stainless Steel drain (Type 316)	-PA	Pennsylvania Steel Act compliant product
-30	PVC socket connection body	-R	2" external water dam
-31	ABS socket connection body	(Standard)	No hub outlet
-81	Rough bronze dome	T	Threaded outlet (2", 3", 4")
-83	Stainless steel mesh screen over dome	-U	Underdeck clamp
-90	Threaded side outlet (2", 3", 4")	-U3	Underdeck clamp with cutaway side
-90NH	No Hub side outlet (cast iron only) (2", 3", 4")	-W	Adjustable water dam
-B	Sump receiver	-W-1	Water proofing flange
-BA	Minimum 51% material cost made in the USA	X	Inside caulk outlet (2", 3", 4")
-C	Secondary clamp	-XJ	Vertical expansion joint (see R1900)
		-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____