

Location: _____




R1200-JD-G18H-W31P-16.5L

**ROOF DRAIN WITH BALLAST
GUARD AND PERFORATED STANDPIPE**

Specification: MIFAB® Series R1200-JD-G18H-W31P-16.5L lacquered cast iron large planting area drain with anchor flange, cast iron water proofing membrane clamp ring, and extended perforated stainless steel ballast guard with a solid secured cover and internal perforated standpipe.

Function: Used to drain water that accumulates on green roof applications. The perforated stainless steel ballast guard prevents vines from entering the drain line.

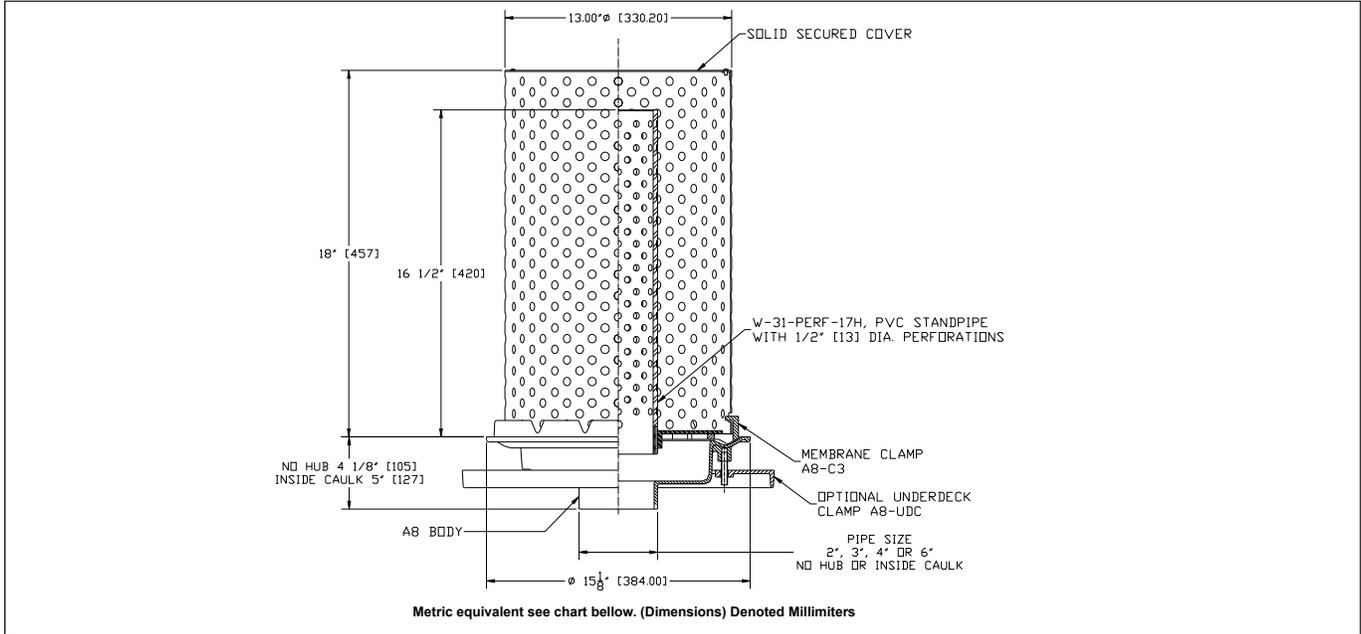

PIPE SIZE	A8 BODY HEIGHT	
	NO HUB (STANDARD)	INSIDE CAULK (X)
2" (51)	4 1/8" (104)	5.05" (127)
3" (76)	4 1/8" (104)	5.05" (127)
4" (102)	4 1/8" (104)	5.05" (127)
5" (127)	4 1/8" (104)	5.05" (127)
6" (152)	4 1/8" (104)	5.05" (127)

Suffix	Description
-3	Perforated Stainless Steel standpipe (Type 304) - 24"
-11	Acid resistant epoxy coated body, membrane clamp & dome
-12A	Galvanized body and membrane clamp
-13	Galvanized body, membrane clamp and dome
-28	Stainless steel body (Type 304)
-84	Stainless Steel mesh screen around standpipe
-B	Sump receiver (A8-BP)
-BA	Buy America Act compliant product
-E	Adjustable extension
-EG	Galvanized adjustable extension
-G(*H)	(* indicates total custom height of ballast guard required.
-PA	Pennsylvania Steel Act compliant product
-P(*L)	(* indicates total custom length of PVC standpipe required
-U	Underdeck clamp (A8-UDC)
-V	Fixed extension, (2",3",4") (A8-V2, A8-V3, A8-V4)
-VG	Galvanized fixed extension, (2",3",4")
-W-1	Water proofing flange (A8-W-1)
X	Inside caulk outlet, (2", 3", 4", 5" or 6")
-Z	Extended wide flange on body (20"Dia. x 1/4 thick)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____