

Location: _____



R1200-JD


**LARGE SUMP REPLACEMENT
ROOF DRAIN**

Specification: MIFAB® Series R1200-JD lacquered cast iron large sump 15" diameter roof drain with anchor flange, large cast iron waterproofing membrane clamp ring with four bolt pattern, integral gravel stop and standard self-locking cast iron dome strainer with a free area of 103 square inches.

Function: Used in any type of flat roofs to replace the existing Josam, Smith, Wade or Zurn large sump roof drain. Large free area dome provides for efficient drainage of rain water and prevents debris from entering the drain line.

**DOMES SECURING
RING, GRAVEL STOP
AND MEMBRANE CLAMP**

**A8 LAQUERED
CAST IRON BODY**

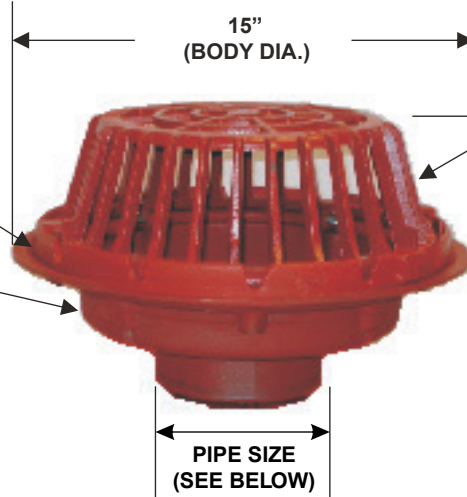

**CAST IRON
DOME STRAINER**

**4 1/2"
(DOME HEIGHT)**

**R1200-JD Series
Meets ASME
roof drain standard
A112.6.4-2003**

PIPE SIZE	NO HUB (STANDARD)	INSIDE CAULK (X)
3" (76)	4 1/8" (105)	4 1/8" (105)
4" (102)	4 1/8" (105)	4 1/8" (105)
6" (152)	4 1/8" (105)	4 1/8" (105)

SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome
-11	Acid resistant epoxy coating
-12	Galvanized metal dome
-12A	Galvanized body and membrane clamp
-13	Galvanized body, membrane clamp and dome
-83	Stainless steel mesh screen over dome
(Standard)	No hub outlet
-B	Sump receiver
-BA	Minimum 51% material cost made in the USA
-G	Stainless steel ballast guard
-PA	Pennsylvania Steel Act compliant product
-RG	RoofGuard non clogging cast iron dome
-V	Fixed static extension, 2", 3", 4"
X	Inside caulk outlet (2",3",4")

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____