

Location: _____

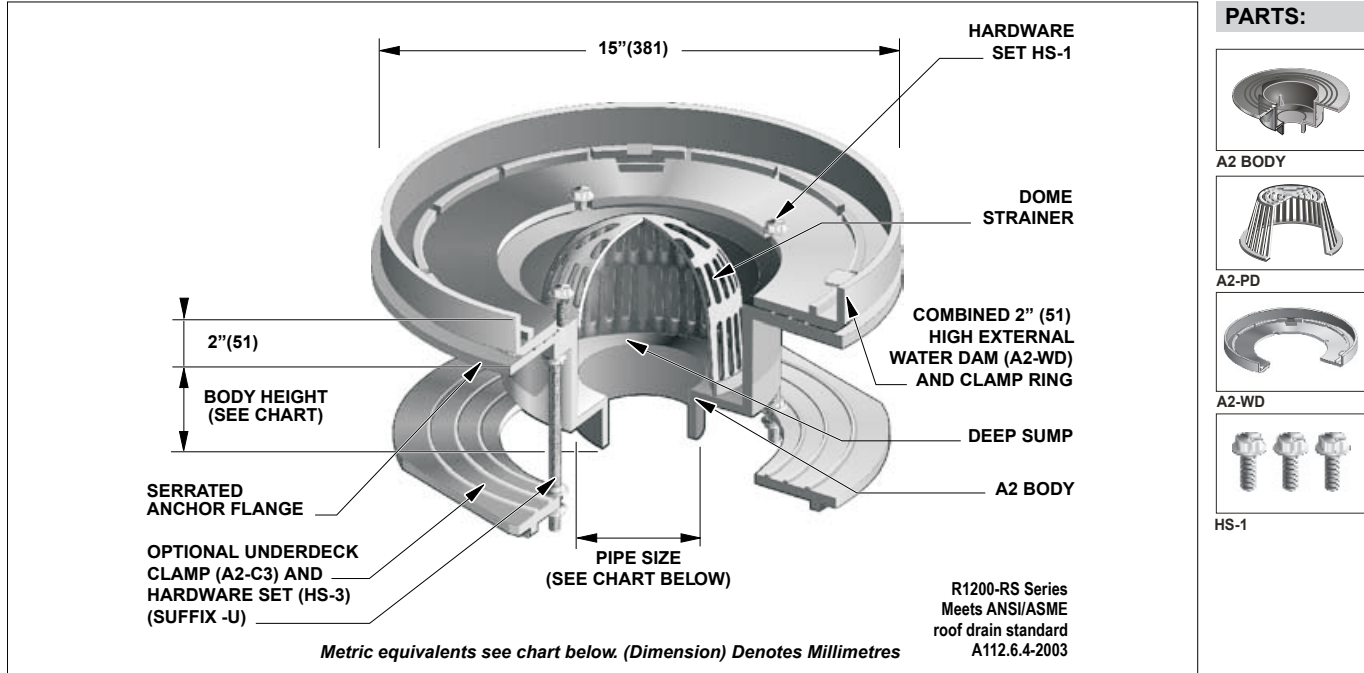






R1200-RS

**LARGE SUMP ROOF DECK
CONDENSATE RECEPTOR DRAIN**

Specification: MIFAB® Series R1200-RS lacquered cast iron deep sump roof drain with 15" diameter anchor flange, 2" high cast iron external combined water dam and waterproofing membrane clamp ring, and internal dome strainer.

Function: Used in flat roofs to receive condensate and wastewater from air conditioners, cooling towers and other mechanical equipment. The 2" high external dam prevents storm water from entering the drain line and the internal dome strainer prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.



- PARTS:**
-  A2 BODY
 -  A2-PD
 -  A2-WD
 -  HS-1

Note: Deck opening - 10" (254) with sump receiver - 15 3/4" (400)

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	5 3/4" (146)	5 1/2" (140)	6 1/2" (165)	6 1/2" (165)	6 3/4" (171)
3" (76)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 1/2" (165)	7 1/2" (191)
4" (102)	5 3/4" (146)	5 1/2" (140)	5 1/2" (140)	6 1/2" (165)	7 5/8" (194)
5" (127)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 3/4" (171)	-
6" (152)	7 1/4" (184)	5 5/8" (143)	5 5/8" (143)	6 1/2" (165)	-
8" (203)	5 7/8" (149)	N/A	N/A	(A7-8X body)	-

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-11	Acid resistant epoxy coating	-EG	Galvanized Adjustable extension
-12	Galvanized metal dome	-HC	Adjustable ballast guard with sec. clamp
-13	Galvanized body, membrane clamp and dome	-JC	S.S. ballast guard with secondary clamp
-28	Stainless steel body (Type 304) (2", 3", 4")	P	Push on outlet
-30	PVC socket connection body	-PA	Pennsylvania Steel Act compliant product
-31	ABS socket connection body	T	Threaded outlet (2", 3", 4")
-81	Rough bronze dome	-U	Underdeck clamp
-83	Stainless steel mesh screen over dome	-U3	Underdeck clamp with cutaway side
-90	Threaded side outlet (2", 3", 4")	-V	Fixed Static Extension 2", 3", 4"
-90NH	No Hub side outlet (cast iron only) (2", 3", 4")	-VG	Galvanized fixed extension (2", 3", 4")
(Standard)	No hub outlet	-W-1	Water proofing flange
-B	Sump receiver	X	Inside caulk outlet (2", 3", 4")
-BA	Buy America Act compliant product	-XJ	Vertical expansion joint (see R1900)
-C	Secondary clamp	-Z	Extended wide elastomeric flange
-E	Adjustable extension		

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____