

Location: \_\_\_\_\_



# STR-DI



# DUCTILE IRON FLANGED

**Specification:** The Ductile Iron “Y” type strainer shall be in 125 Class and conform to ANSI B16.1, and both the body and access cover shall be made of Ductile Iron A536 65-45 12. The valve shall be supplied with a drain/blow-off connection with a ductile iron closure plug. The integral strainer screen shall be accessible for cleaning without removing the device from the line.


**Ratings:** Working Pressure 125 PSI. Shell Pressure 350 PSI.

**Materials:**

- Body and Cover: Ductile Iron ASTM A536. Lead Free.
- Bolts: Carbon Steel ASTM A307.
- Screen: 304 Stainless Steel.
- Gasket: NBR.
- Drain Plug Carbon Steel ASTM A307.

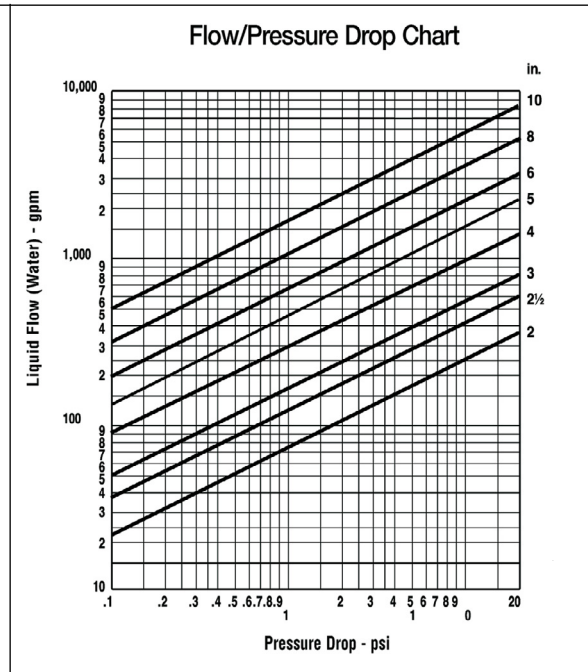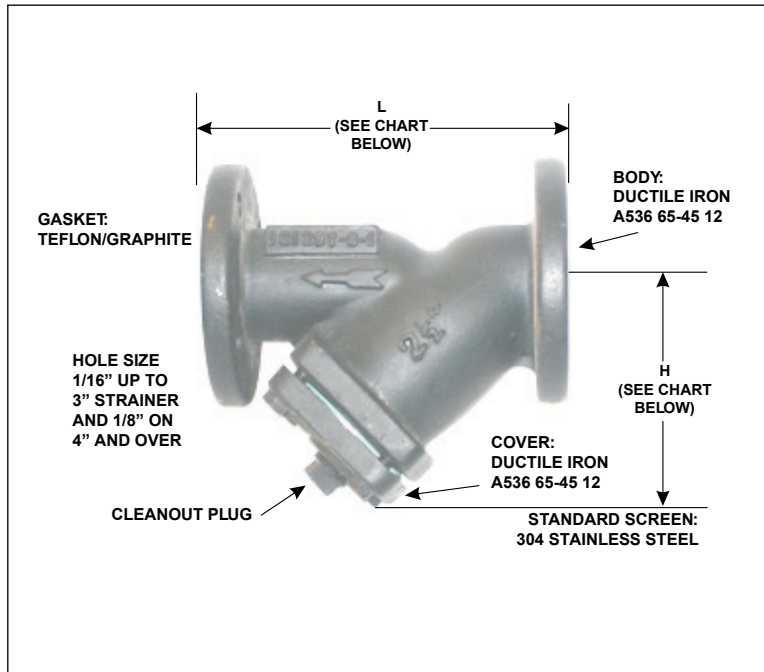

MODEL NO.	SIZE	L	H	PLUG
STR2.00-IRON-FLG	2"	8 7/8"	5 1/2"	1/2"
STR2.50-IRON-FLG	2 1/2"	10 3/4"	6 1/2"	1/2"
STR3.00-IRON-FLG	3"	11 1/2"	7 7/8"	1/2"
STR4.00-IRON-FLG	4"	13 7/8"	8 7/8"	1/2"
STR6.00-IRON-FLG	6"	18 1/2"	11 7/8"	1"
STR8.00-IRON-FLG	8"	21 3/8"	14 3/4"	1"
STR10.00-IRON-FLG	10"	26"	17"	1"

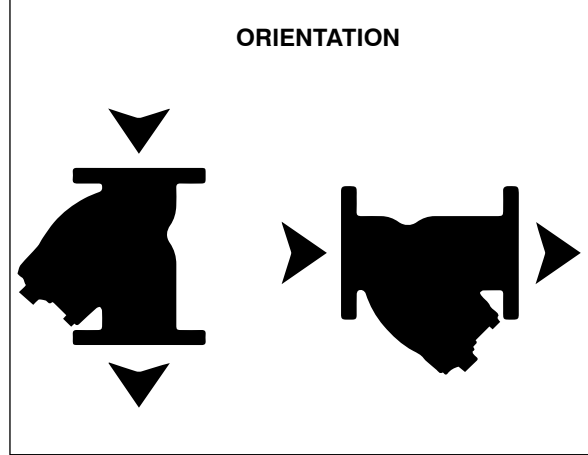

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_