

Location: \_\_\_\_\_




# T1360-FL-FAB

## 12" WIDE, PRESLOPED FABRICATED STEEL TRENCH DRAIN SYSTEM WITH FLAT BOTTOM

**Specification:** MIFAB® Series T1360-FL-FAB, 12" wide, 36" long, (or length as needed), pre-sloped (1/8" per foot) modular trench drain. Body is manufactured from 14 gauge steel and finished with an acid resistant powder epoxy coating. Each body has a 3" wide anchor flange on each side recessed 2 3/4" down from the top. Bodies have flanged ends to connect to each other with a neoprene rubber gasket in between. End and bottom outlets are available in 2", 3", 4" or 6" no hub outlet connections and are fabricated as part of the trench drain system. 12" long, Class E, H-20 ductile iron grates are provided as standard (Suffix -4). Catch basins are also available.

**Function:** Used in precast construction pours. Extra wide 3" anchor flange is designed to install over precast concrete slabs. Standard 2 3/4" depth from the anchor flange to the top of the drain allows for concrete to secure the drain system within the slab.

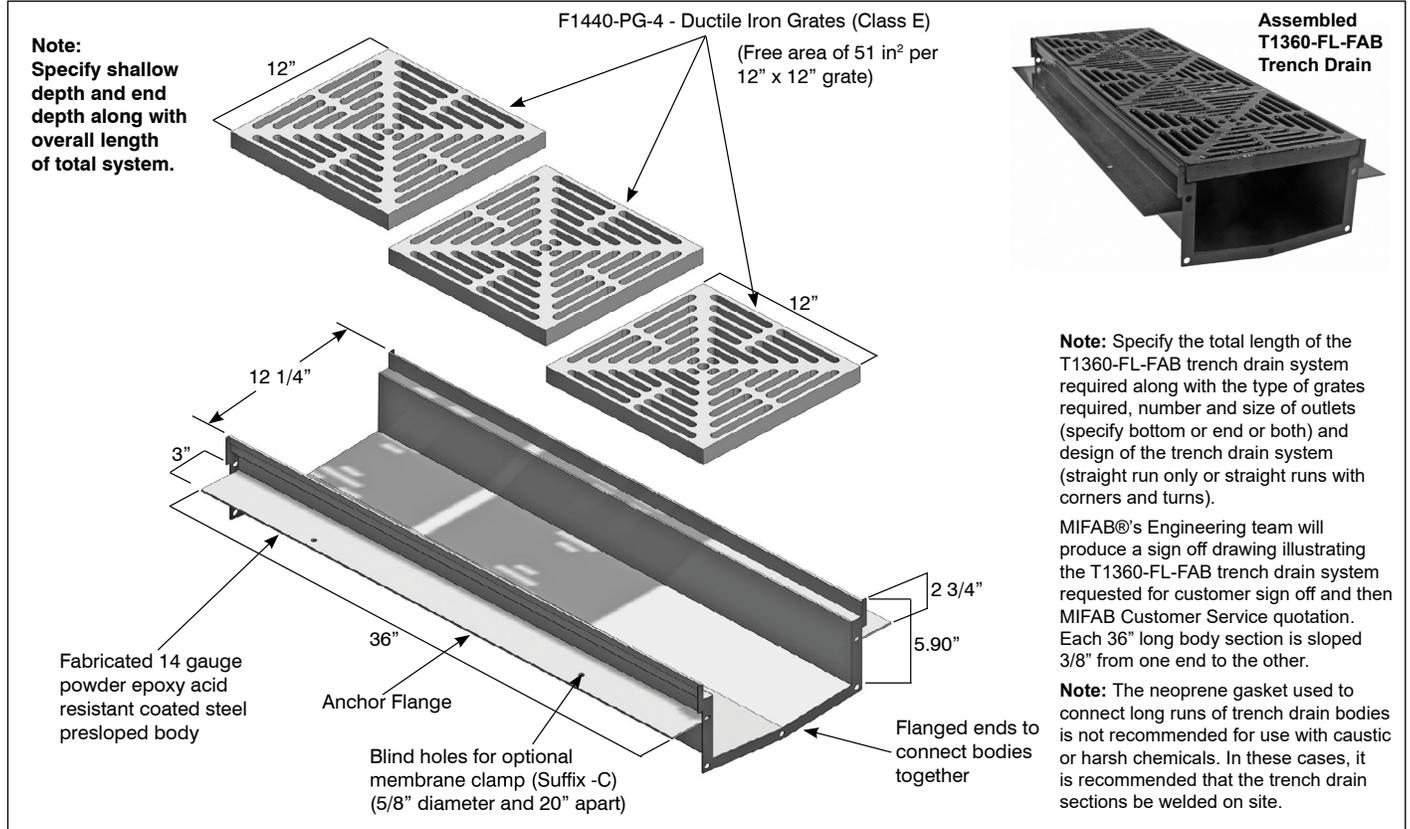

Ductile Iron Grates (all 12" x 12". Three grates required per body section)	
Suffix	Description
-BA	Buy American Act compliant product
-PA	Pennsylvania Steel Act compliant product
-4	"Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-4-3	"Special Duty" Ductile Iron slotted grate (Standard) Load Class E with Type 304 Stainless Steel Veneer.
-4-11	A.R.E. coated "Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-4-13	Galvanized coated "Special Duty" Ductile Iron slotted grate (Standard) Load Class E
-7MG	MI-GARD trap seal protection device (available for 1-1/2", 2", 3", 3-1/2", 4" and 6" outlet connections)
End caps / Outlets / Accessories	
-PEC	Closed end cap
-PE2	2" no hub end outlet
-PE3	3" no hub end outlet
-PE4	4" no hub end outlet

-PE6	6" no hub end outlet
-PB2	2" no hub bottom outlet
-PB3	3" no hub bottom outlet
-PB4	4" no hub bottom outlet
-PB6	6" no hub bottom outlet
-PBDS	Bottom dome strainer
-PGLVP	Vandal resistant grate lockdown hardware (Suffix -6) (per grate)
Fabrications	
-TEE	Fabricated Steel tee
-PB-45	45 Degree Body Section
-PB-90	90 Degree Body Section
-45	45 Degree Ductile Iron Slotted grate - Class E
-90	90 Degree Ductile Iron Slotted grate - Class E
-SOF	Side Outlet Fabrication
-CF	Cross Fabrication
-C	Membrane Clamp (2 pieces) with hardware
-PB-3	Fabricated T1360-FL-FAB body with Type 304 Stainless Steel overlay on frame of body.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_  
 Section No: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Purchase Order No: \_\_\_\_\_