





Location: \_\_\_\_\_



## Galvanized Steel Perforated Grate to suit 4" clear opening channels



**Specification:** T100-PGA-13-FP galvanized steel perforated grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class A (Part # TP100-PGA-13-FP-500).

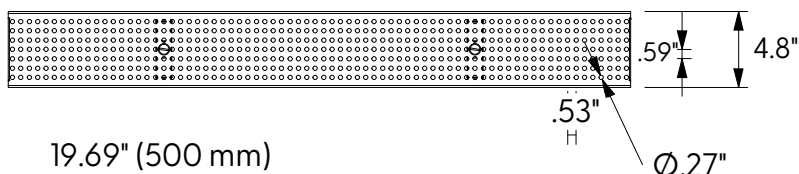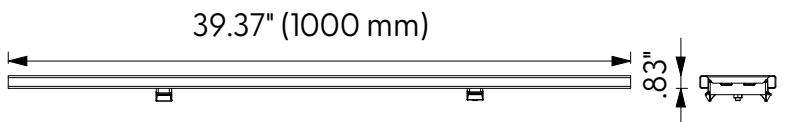

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS A



EN 1433 - 3,372 LBS.,  
15kN, 70 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-13-FP	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-13-FP-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-13-FP	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-13-FP-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880





Location: \_\_\_\_\_



## Stainless Steel Perforated Grate to suit 4" clear opening channels



**Specification:** T100-PGA-3-FP stainless steel perforated grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class A (Part # T100-PGA-3-FP-500).

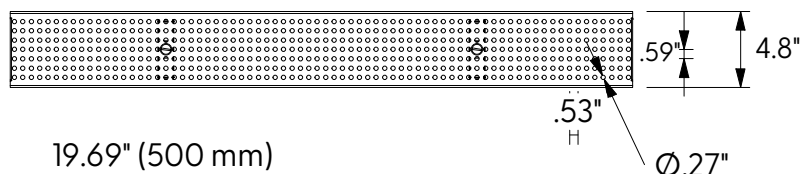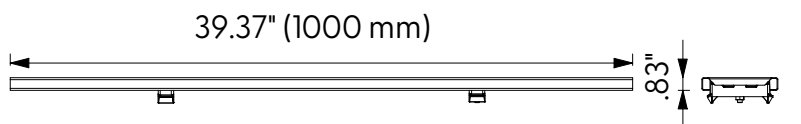

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS A



EN 1433 - 3,372 LBS.,  
15kN, 70 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-3-FP	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-3-FP-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-3-FP	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-3-FP-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location: \_\_\_\_\_



## Galvanized Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGA-13-FS galvanized slotted steel grates are independently certified to meet Load Class A tested in accordance with EEN1433 (3,372 lbs. (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class A (Part # T100-PGA-13-FS-500).

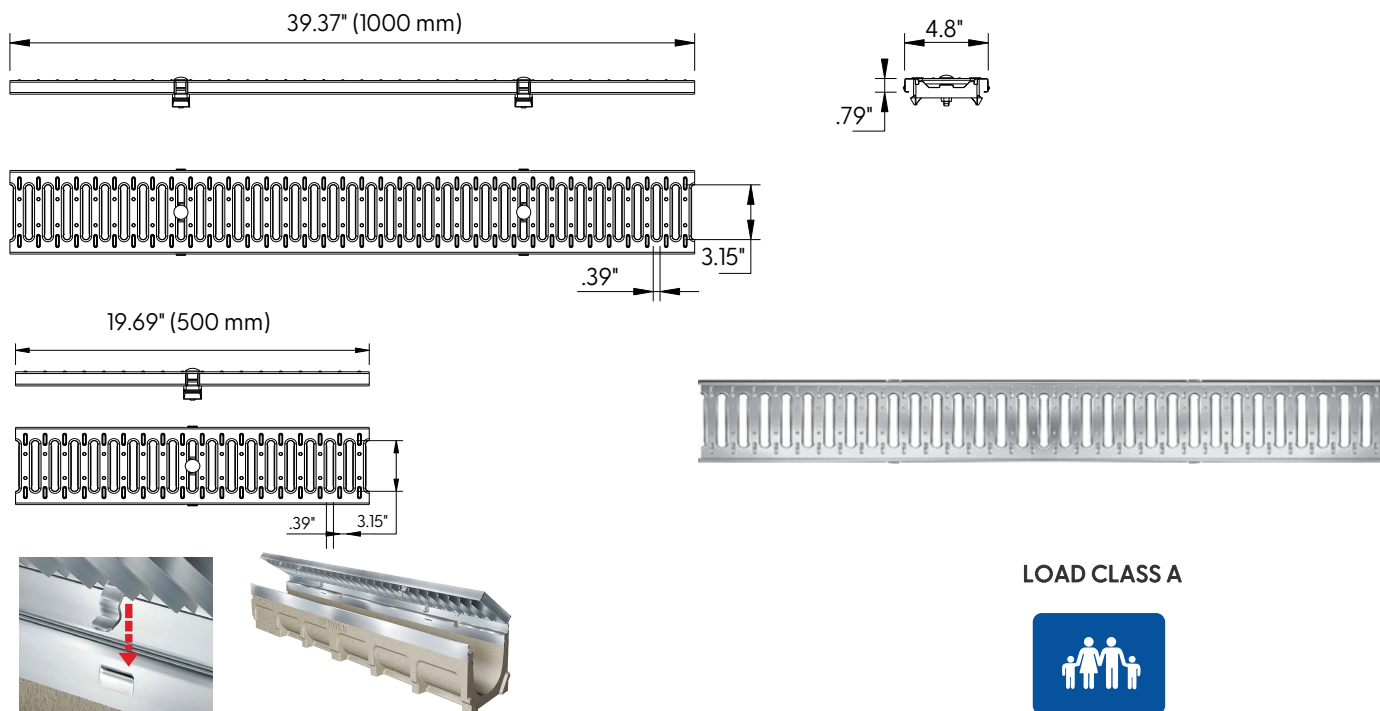

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS A



A: EN 1433 - 3,372 lbs.,  
15kN, 70 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-13-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-13-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-13-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-13-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880






Location:



## Stainless Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGA-3-FS stainless steel slotted grates are independently certified to meet Load Class A tested in accordance with EN1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class A (Part # T100-PGA-3-FS-500).

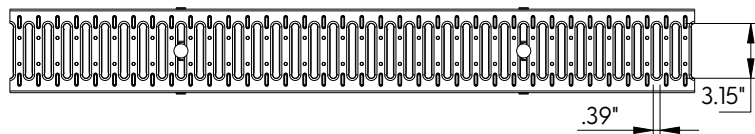

### LOAD CLASS A



A: EN 1433 - 3,372 lbs.,  
15kN, 70 PSI

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-3-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-3-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-3-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-3-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880




Location:



## Stainless Steel Mesh Grate to suit 4" clear opening channels



**Specification:** T100-PGA-3-SM stainless steel mesh grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class A (Part # T100-PGA-3-SM-500).

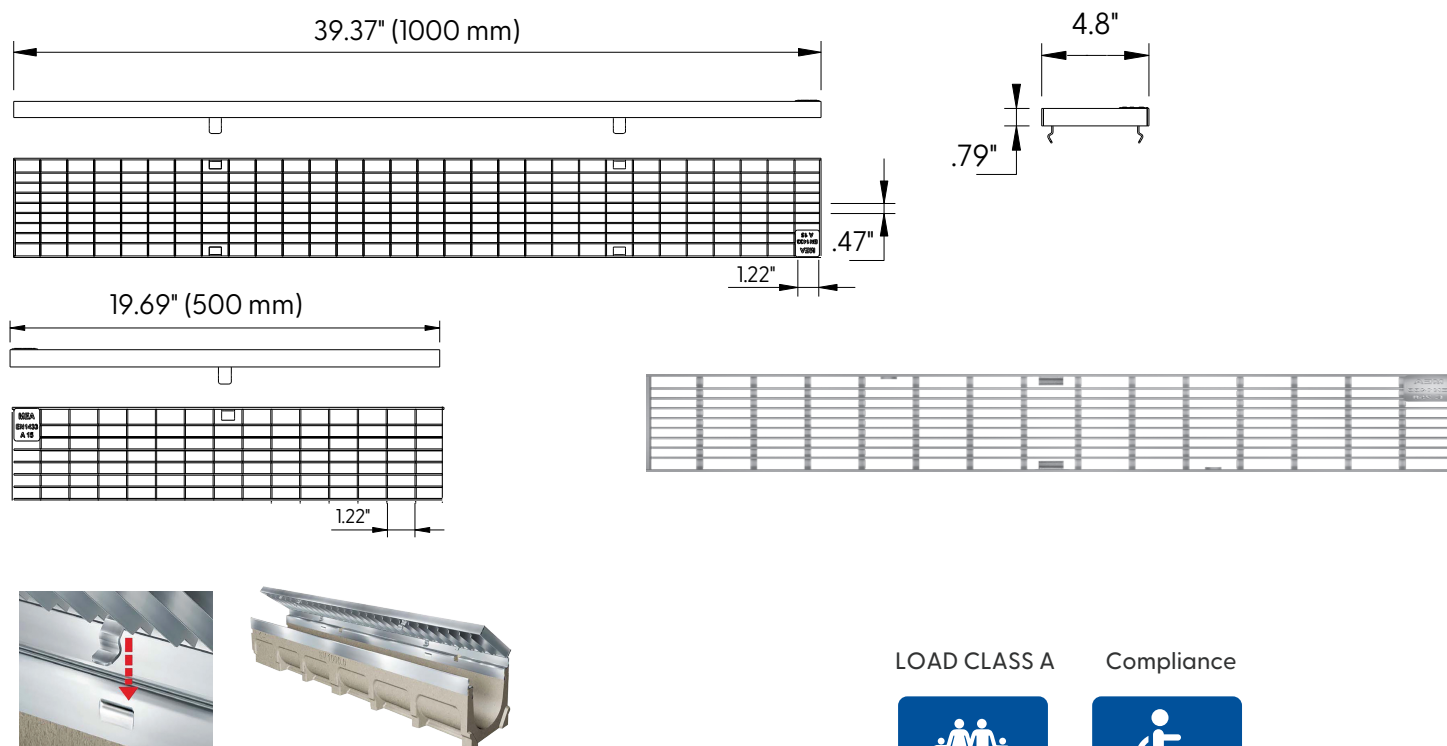

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS A



EN 1433 - 3,372 LBS.,  
15kN, 70 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGA-3-SM	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGA-3-SM-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGA-3-SM	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGA-3-SM-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Galvanized Steel Longitudinal Grate to suit 4" clear opening channels



**Specification:** T100-PGB-13-LS galvanized longitudinal steel grates are independently certified to meet Load Class B tested in accordance with EN 1433 (28,100 lbs. (125kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP100-PGB-13-LS-500).

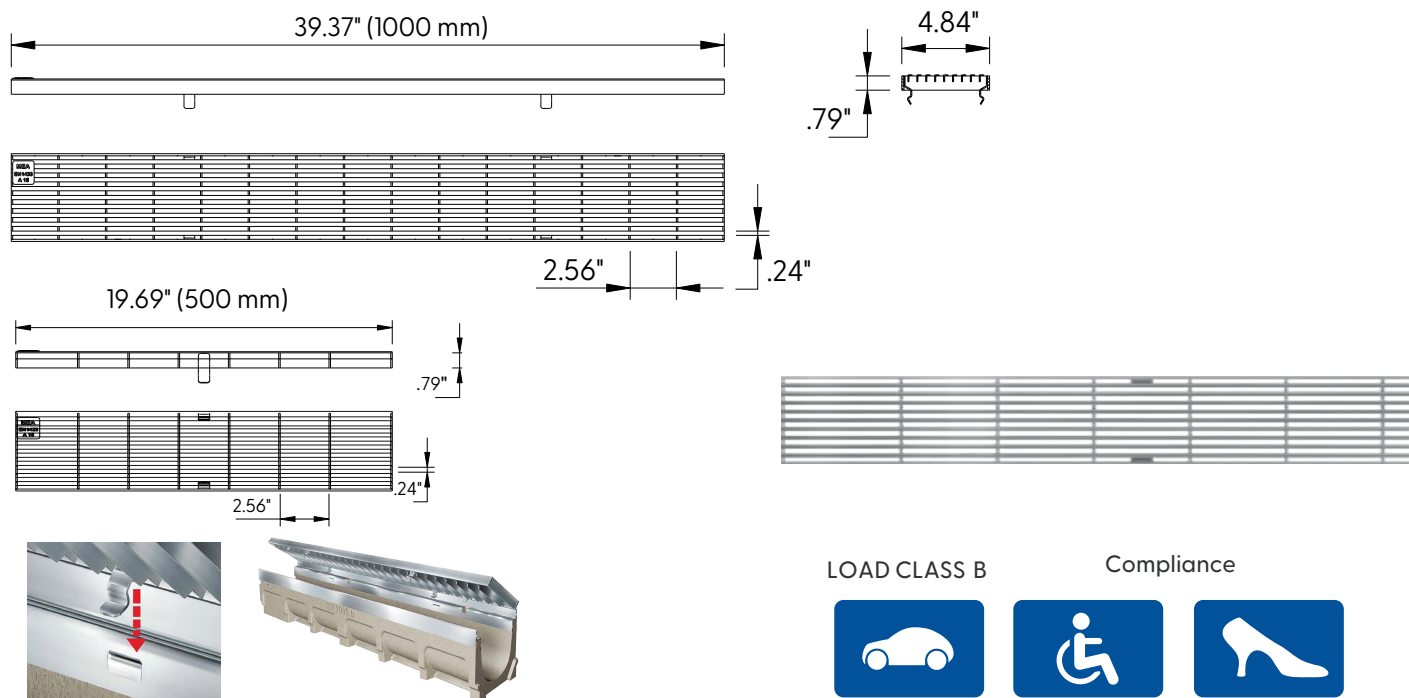

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS B



EN 1433 - 28,100 LBS.,  
125kN, 580 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGB-13-LS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGB-13-LS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGB-13-LS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGB-13-LS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Stainless Steel Longitudinal Grate to suit 4" clear opening channels



**Specification:** T100-PGB-3-LS stainless steel longitudinal grates are independently certified to meet Load Class B tested in accordance with EN 1433 (28,100 lbs. (125kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP100-PGB-3-LS-500).

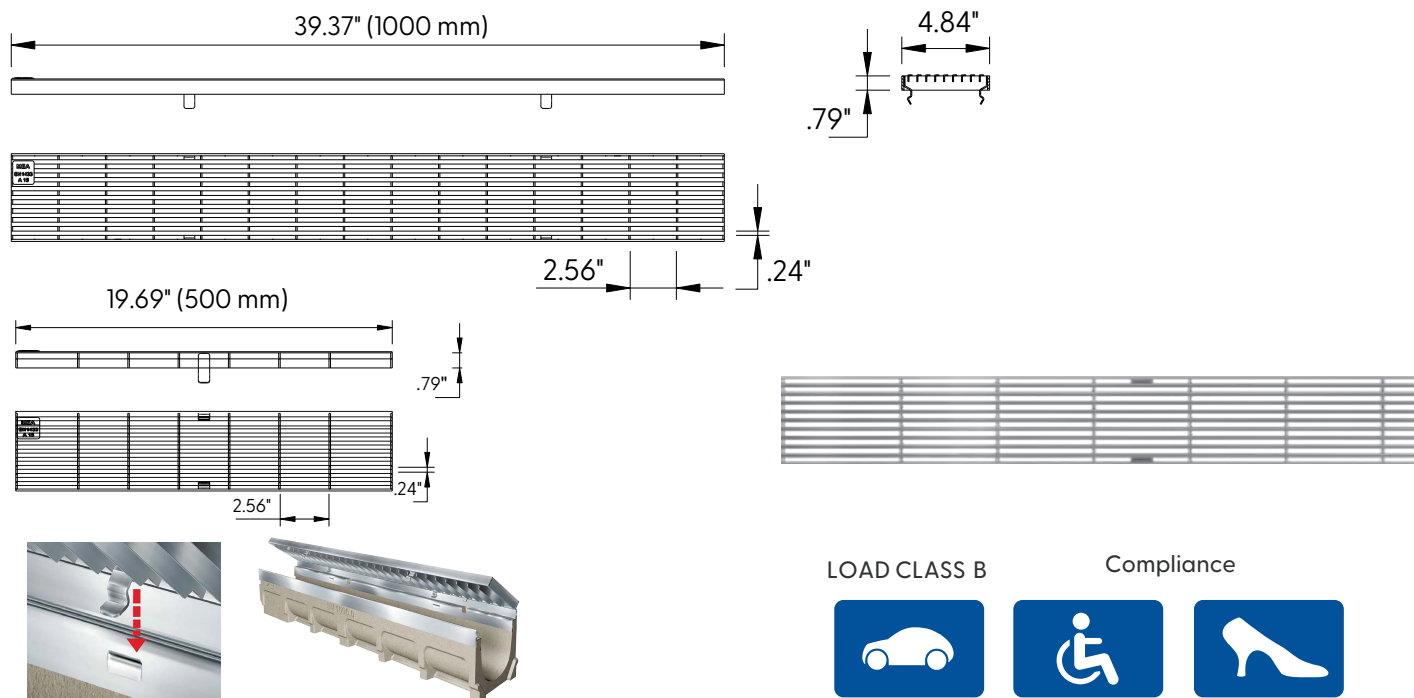

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS B



EN 1433 - 28,100 LBS.,  
125kN, 580 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGB-3-LS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGB-3-LS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGB-3-LS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGB-3-LS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Galvanized Steel Perforated Grate to suit 4" clear opening channels



**Specification:** T100-PGC-13-FP galvanized steel perforated grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class C (Part # T100-PGC-13-FP-500).

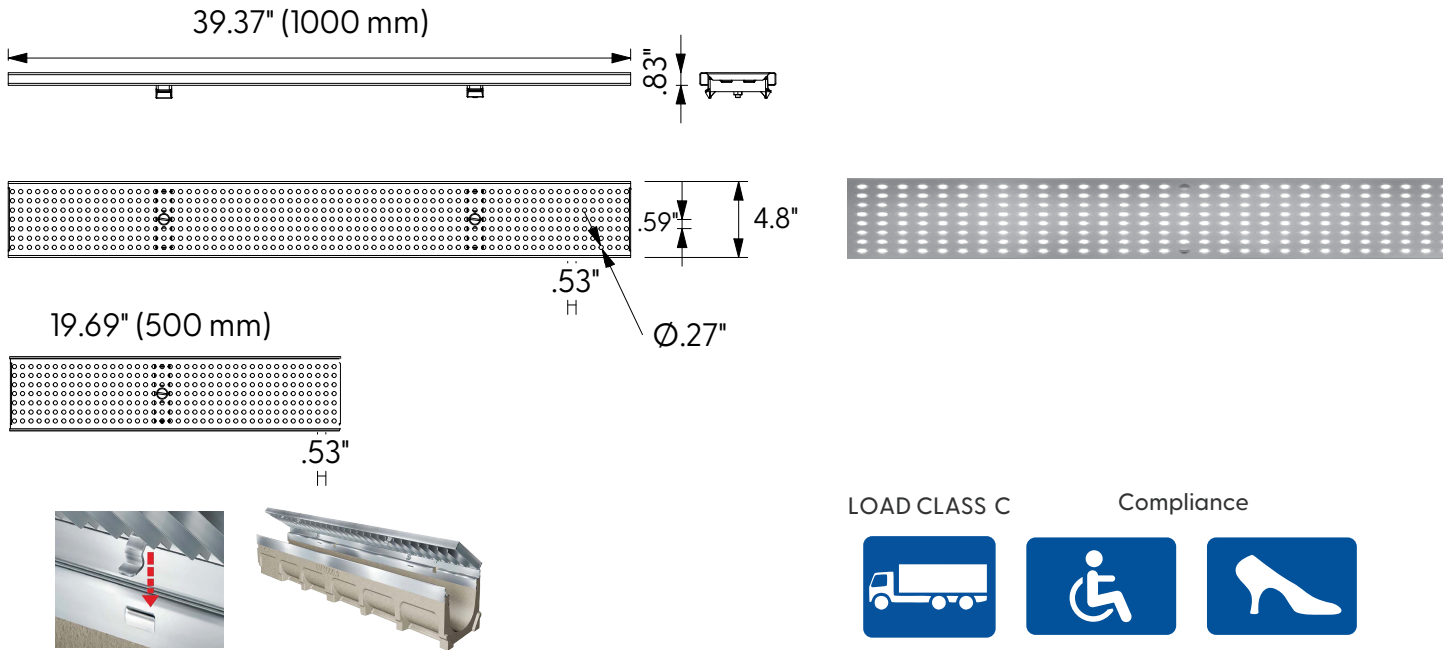

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-FP	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-13-FP-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-FP	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-13-FP-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880





Location:



## Stainless Steel Perforated Grate to suit 4" clear opening channels



**Specification:** T100-PGC-3-FP stainless steel perforated grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class C (Part # T100-PGC-3-FP-500).

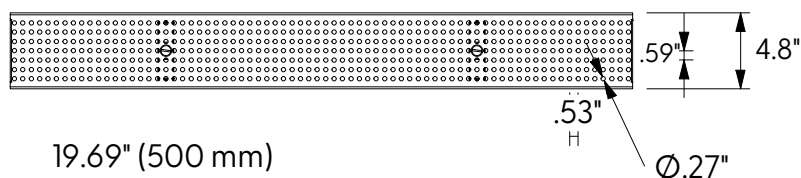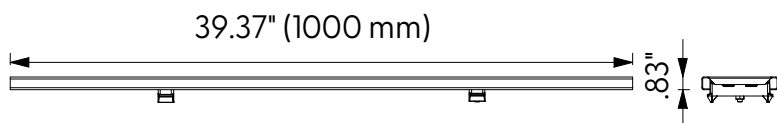

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C

Compliance



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-FP	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-3-FP-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-FP	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-3-FP-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location: \_\_\_\_\_



## Galvanized Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-13-FS galvanized slotted steel grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class C (Part # T100-PGC-13-FS-500).

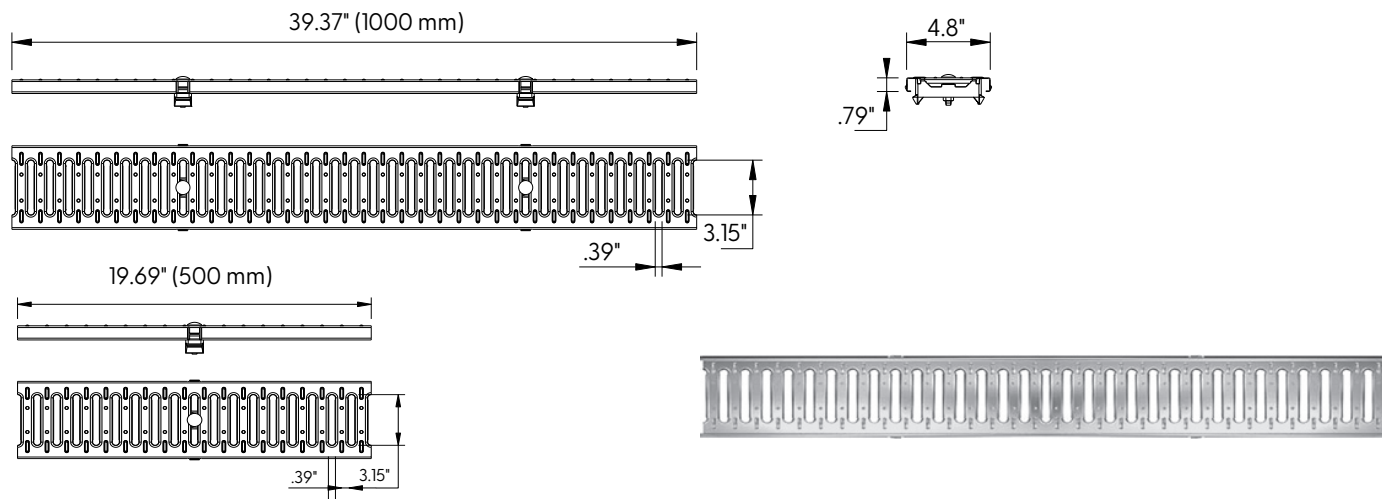

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



C: EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-13-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-13-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location: \_\_\_\_\_



## Stainless Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-3-FS stainless steel slotted grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class C (Part # T100-PGC-3-FS-500).

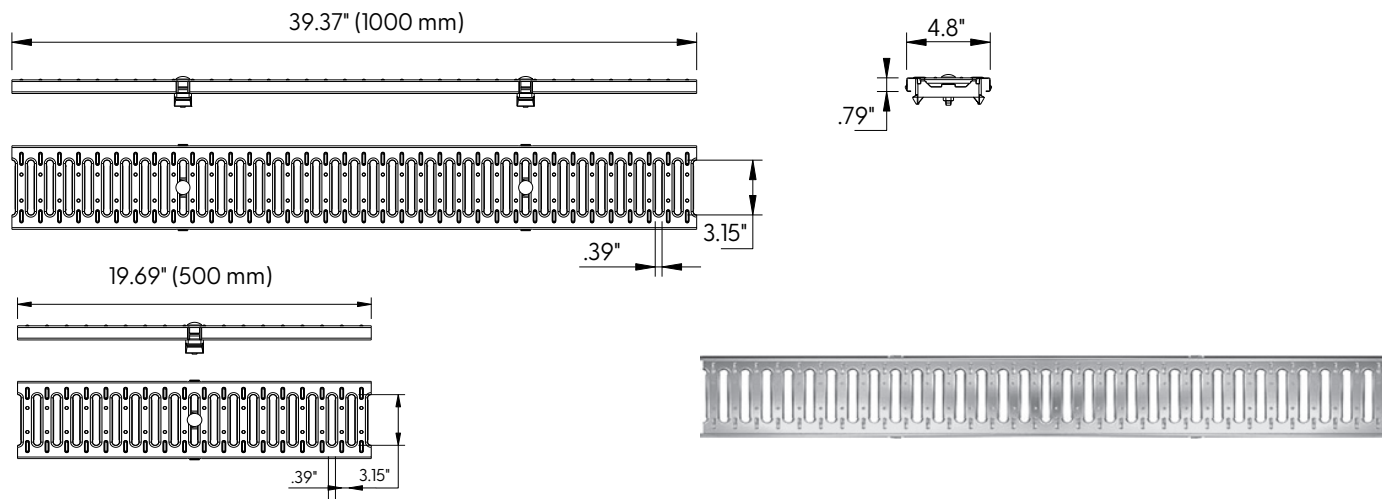

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



C: EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-3-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-3-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880




Location:



## Galvanized Mesh Grate to suit 4" clear opening channels



**Specification:** T100-PGC-13-GM galvanized steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (0.5m) grates are also available in Load Class C (Part # T100-PGC-13-GM-500).

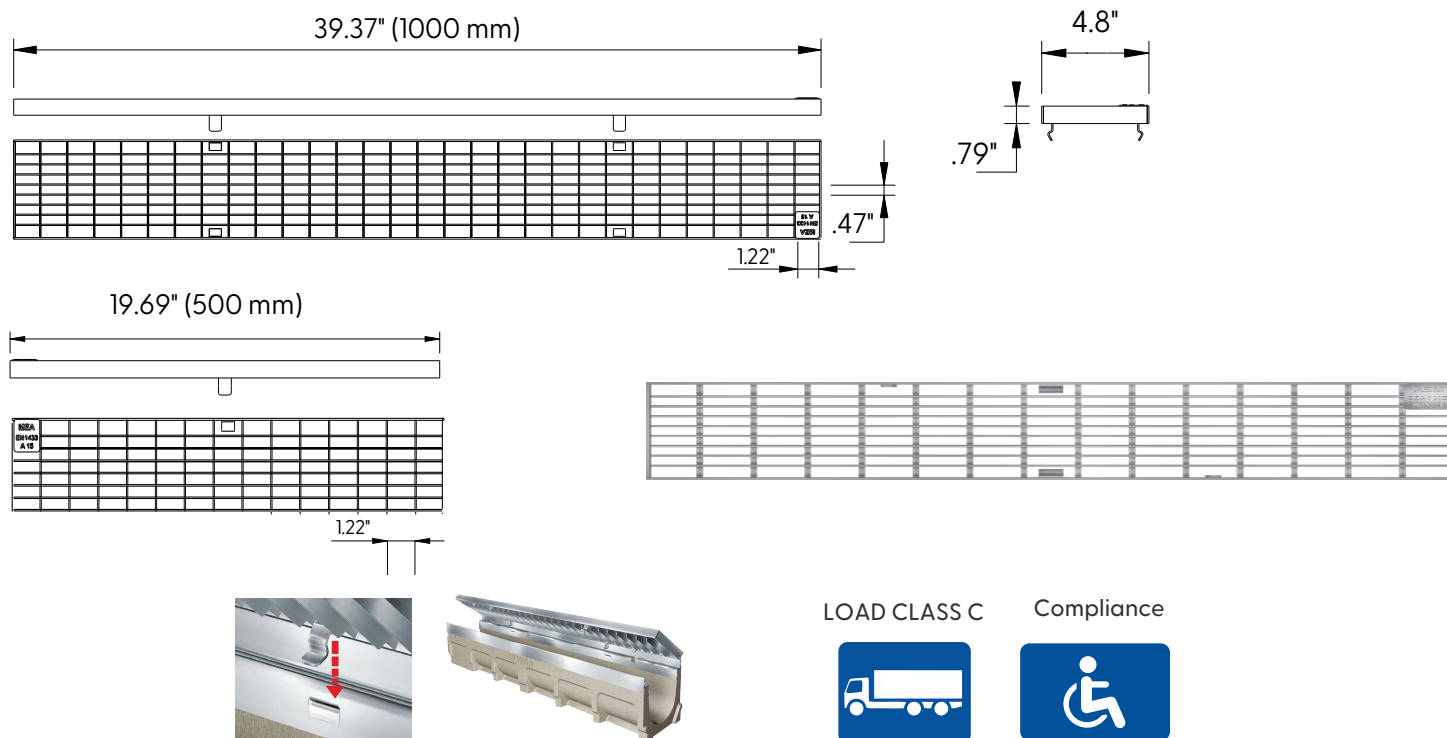

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-GM	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-13-GM-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-GM	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-13-GM-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location: \_\_\_\_\_



## Stainless Steel Mesh Grate to suit 4" clear opening channels



**Specification:** T100-PGC-3-SM stainless steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs. (250kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class C (Part # T100-PGC-3-SM-500).

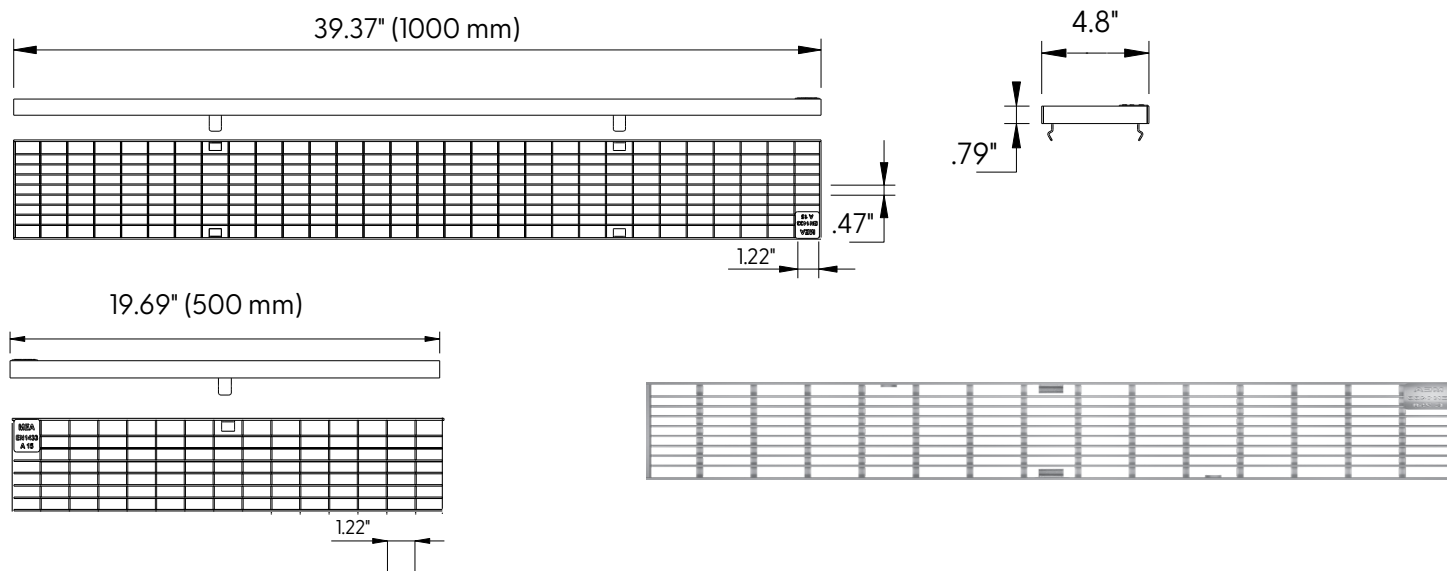

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-SM	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-3-SM-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-SM	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-3-SM-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 12/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Galvanized Paverslot Grates to suit 4" clear opening channels



**Specification:** T100-PGC-13-SD galvanized paverslot grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class C (Part # T100-PGC-13-SD-500).

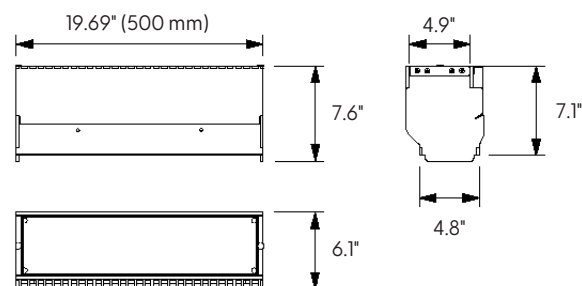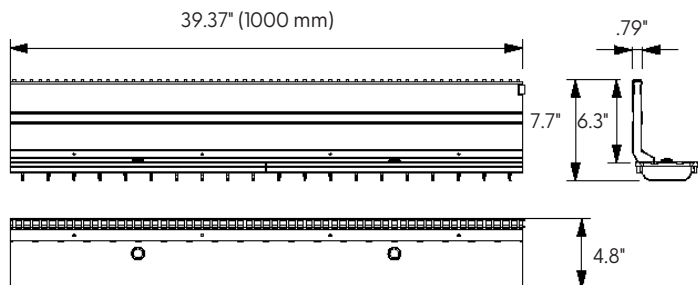

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-SD	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-13-SD-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-SD	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-13-SD-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Stainless Steel Paverslot Grates to suit 4" clear opening channels



**Specification:** T100-PGC-3-SD stainless steel paverslot grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional (.5 m) grates are also available in Load Class C (Part # T100-PGC-3-SD-500).

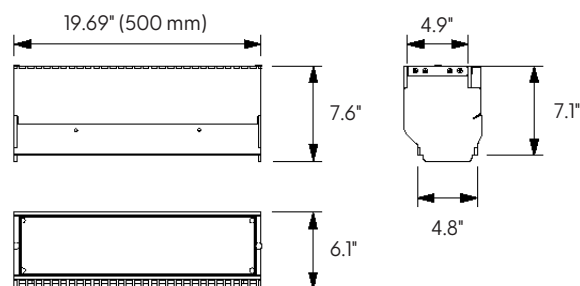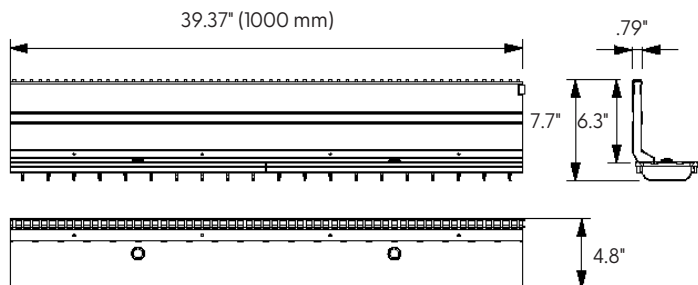

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-SD	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-3-SD-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-SD	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-3-SD-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Galvanized Steel Paverslot Maintenance Unit Grate to suit 4" clear opening channels



**Specification:** T100-PGC-13-SD-MU-500 galvanized maintenance unit paverslot grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

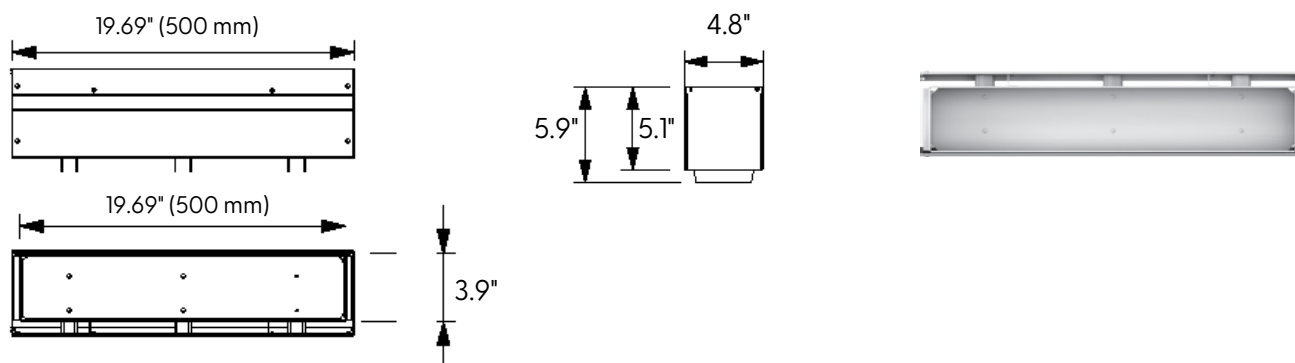

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-SD-MU-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-SD-MU-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location: \_\_\_\_\_



## Stainless Steel Maintenance Unit Grates to suit 4" clear opening channels



**Specification:** T100-PGC-3-SD-MU-500 galvanized maintenance unit paverslot grates are independently certified to meet Load Class C tested in accordance with EN1433 (56,200 lbs. 250kN). The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

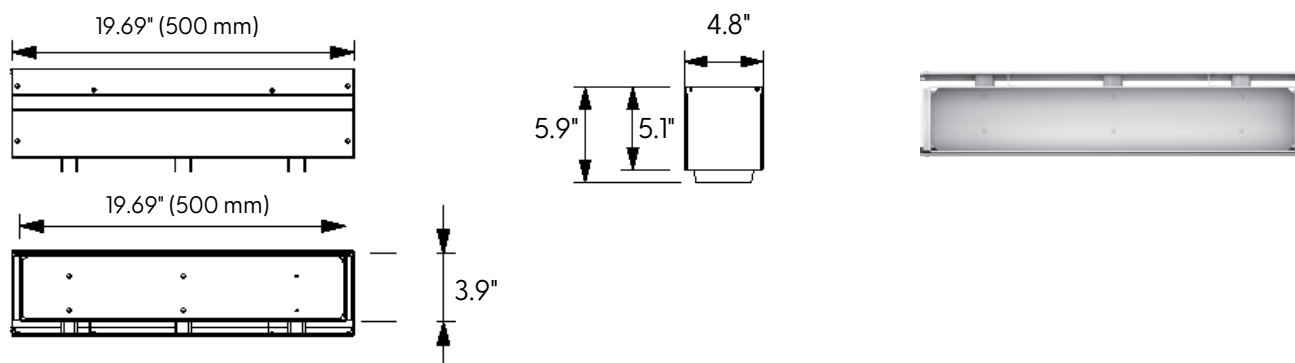

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1,160 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-SD-MU-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-SD-MU-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Plastic Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-HPP plastic grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

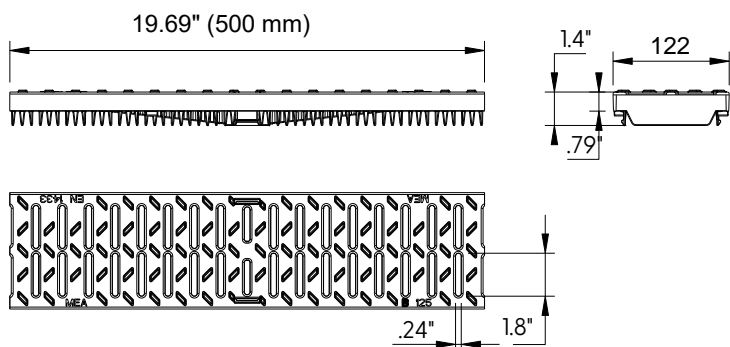

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

### Compliance



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-FP-500	19.69" (500 mm)	T1500 Concrete Channel
T100-PGC-3-FP-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880




Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-4 ductile iron grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

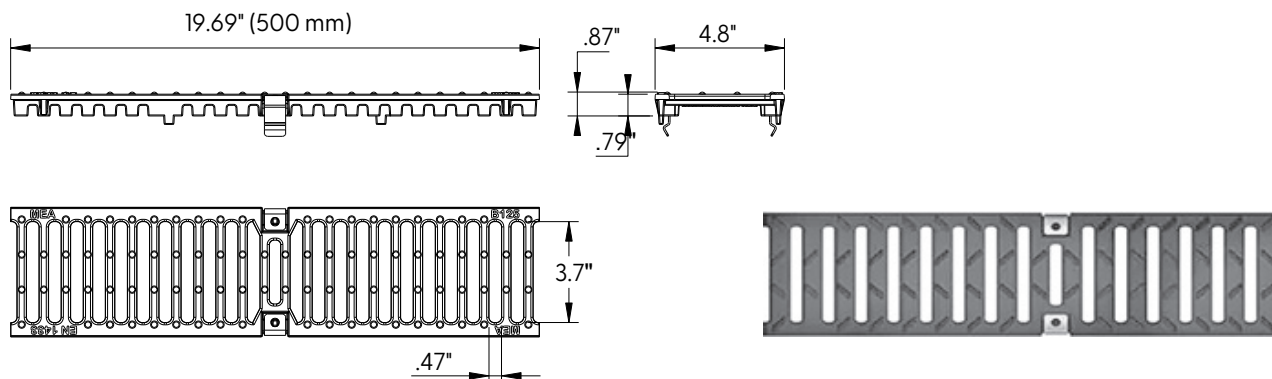

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-4	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-4	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGC-4-HP ductile iron grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

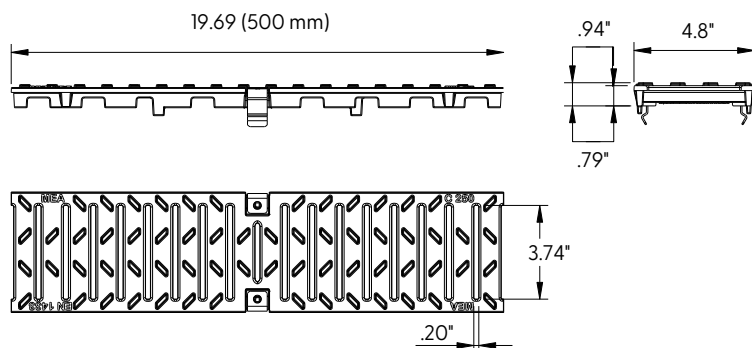

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-4-HP	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-4-HP	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location: \_\_\_\_\_



## Ductile Iron Wave Grate to suit 4" clear opening channels



**Specification:** T100-PGC-4-WVY ductile iron wave grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

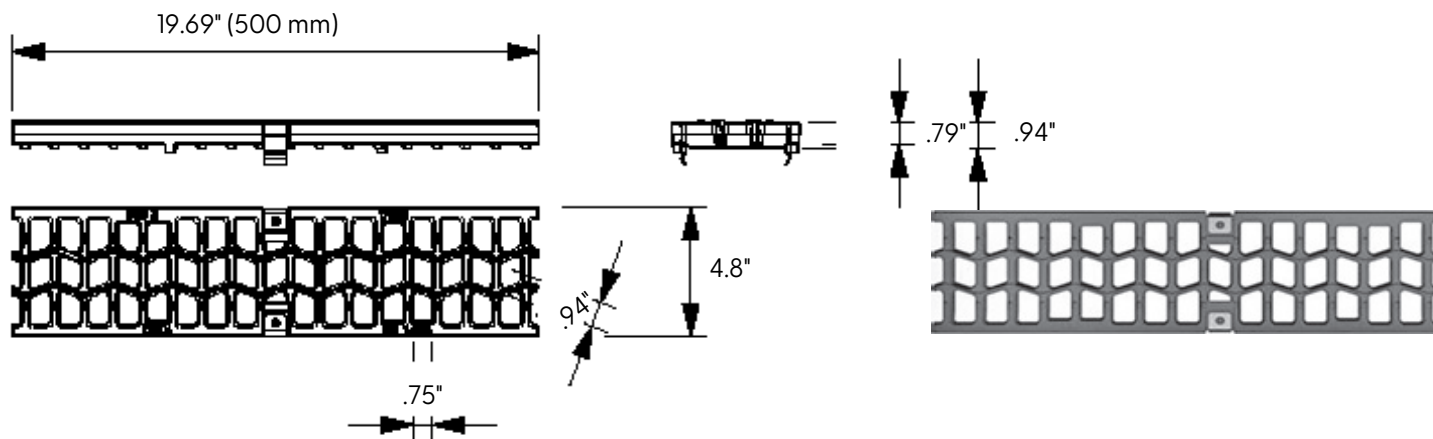

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-4-HP	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-4-HP	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Ductile Iron Bavaria Grate to suit 4" clear opening channels



**Specification:** T100-PGC-4-BG ductile iron bavaria grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

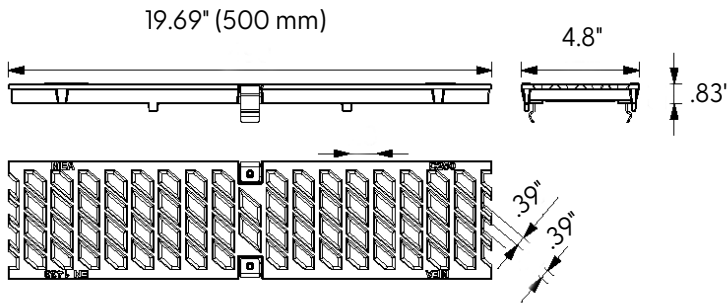

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-4-BG	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-4-BG	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 10/27/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880






Location: \_\_\_\_\_



## Galvanized Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-13-FS galvanized steel slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 (134,800 lbs. (600kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP100-PGE-13-FS-500).

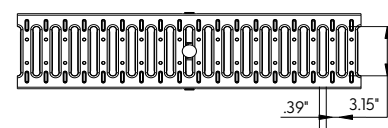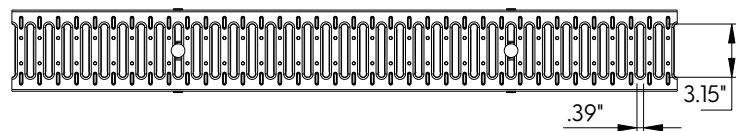

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-13-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-13-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-13-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-13-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880






Location: \_\_\_\_\_



## Stainless Steel Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-3-FS stainless steel slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 (134,800 lbs. (600kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP100-PGE-3-FS-500).

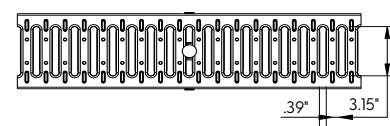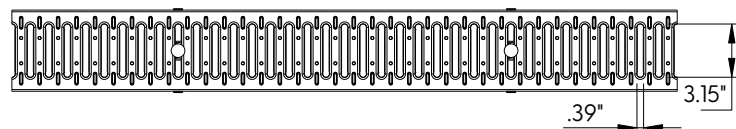

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGC-3-FS	39.37" (1000 mm)	T1500 Concrete Channel
T100-PGC-3-FS-500	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGC-3-FS	39.37" (1000 mm)	T1400 Plastic Channel or T1330 Aluminum Channel
TP100-PGC-3-FS-500	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4 ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

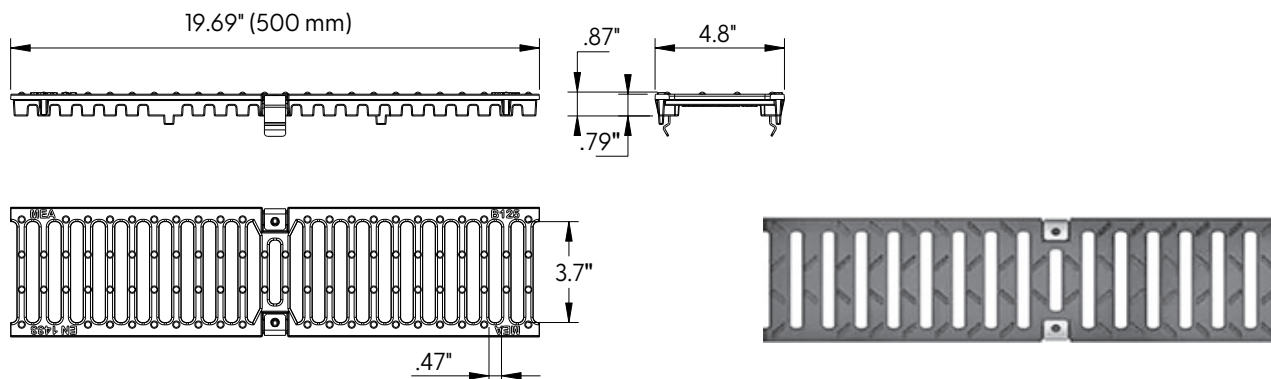

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGE-4	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGE-4	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880




Location: \_\_\_\_\_



## Galvanized Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4-13 galvanized ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

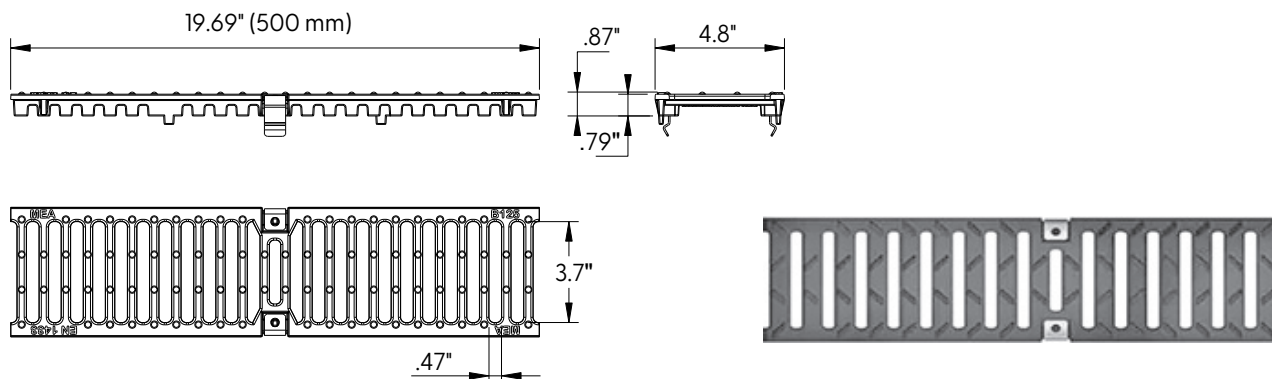

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGE-4-13	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGE-4-13	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880


Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4-HP ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

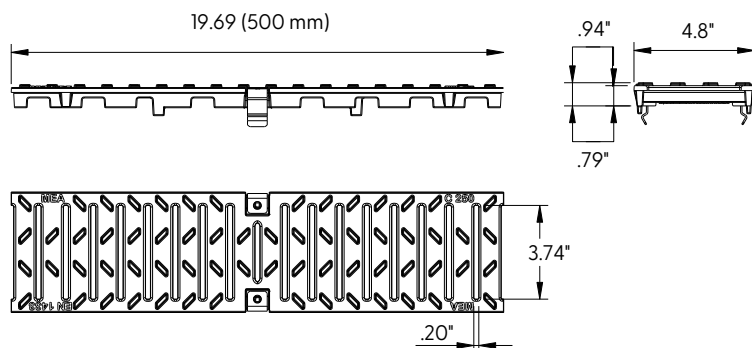

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### Compliance



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGE-4-HP	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGE-4-HP	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Ductile Iron Longitudinal Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4-ADA ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

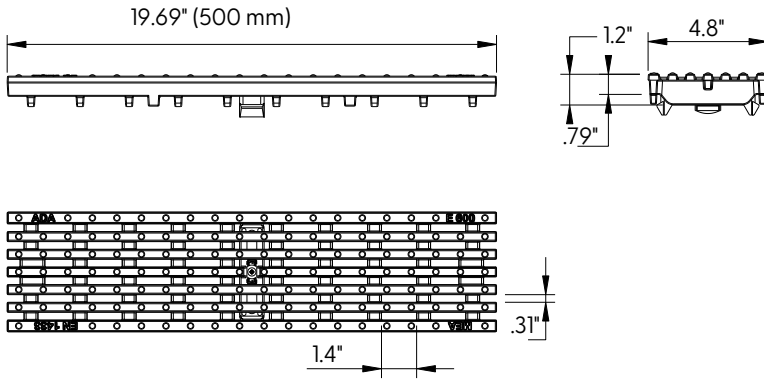

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGE-4-ADA	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGE-4-ADA	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Galvanized Ductile Iron Longitudinal Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGE-4-ADA-13 ductile iron slotted grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

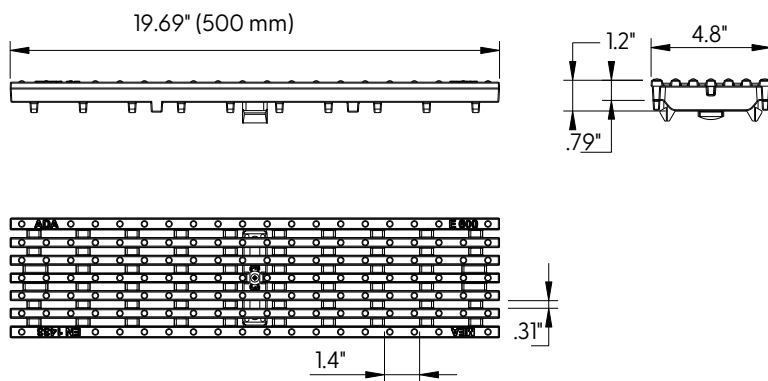

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGE-4-ADA-13	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGE-4-ADA-13	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880



Location:



## Ductile Iron Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGF-4 ductile iron grates are independently certified to meet Load Class F tested in accordance with EN 1433 (202,320 lbs. (900kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

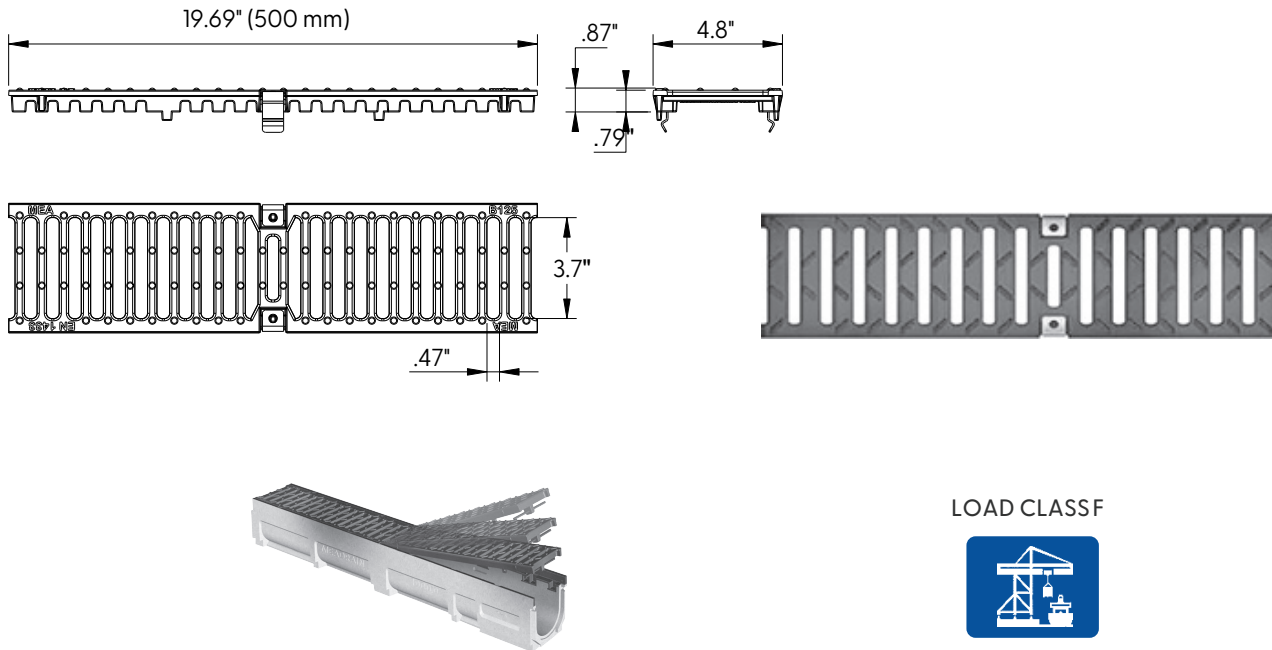

### PROFIX ADVANTAGE

The MEA polymer concrete channels with ductile iron grates have been designed for our universal PROFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS F



EN 1433  
202,320 LBS.,  
900kN, 4,177 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGF-4	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGF-4	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880




Location:



## Galvanized Ductile Iron Longitudinal Slotted Grate to suit 4" clear opening channels



**Specification:** T100-PGF-4-ADA ductile iron grates are independently certified to meet Load Class F tested in accordance with EN 1433 (202,320 lbs. (900kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

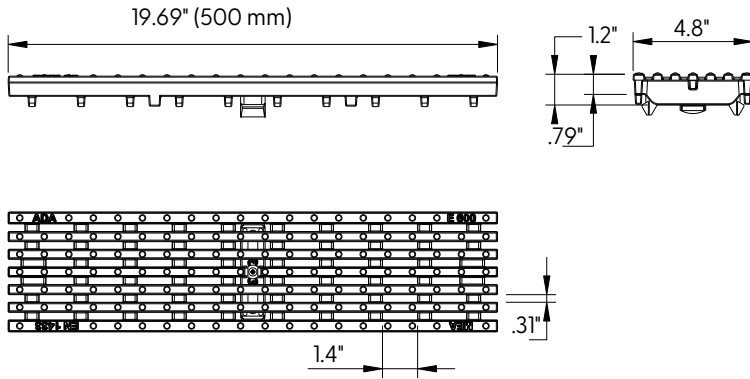

### PROFIX ADVANTAGE

The MEA polymer concrete channels with ductile iron grates have been designed for our universal PROFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASS F



EN 1433  
202,320 LBS.,  
900kN, 4,177 PSI

### Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T100-PGF-4-ADA	19.69" (500 mm)	T1500 Concrete Channel
TP100-PGF-4-ADA	19.69" (500 mm)	T1400 Plastic Channel or T1330 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/01/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880