


## Galvanized Steel Mesh Grate to suit 8" clear opening channels

**Specification:** T200-PGA-13-GM galvanized steel mesh grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (0.5m) grates are also available in Load Class A (Part # T200-PGA-13-GM-500).

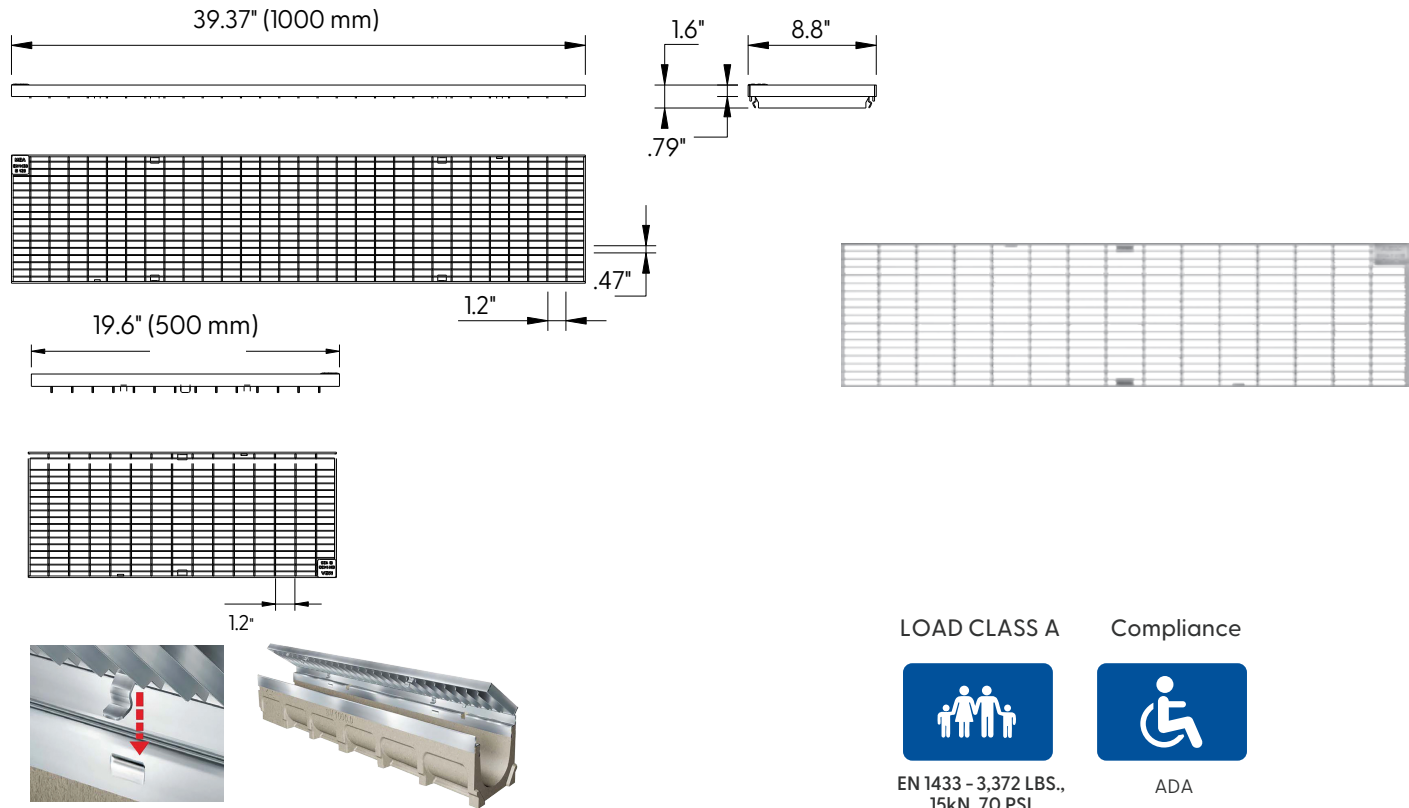

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS A



EN 1433 - 3,372 LBS.,  
 15kN, 70 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGA-13-GM	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGA-13-GM-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGA-13-GM	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGA-13-GM-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 10/29/2021**


CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Location:



## Stainless Steel Mesh Grate to suit 8" clear opening channels

**Specification:** T200-PGA-3-SM stainless steel mesh grates are independently certified to meet Load Class A tested in accordance with EN 1433 (3,372 lbs (15kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class A (Part # T200-PGA-3-SM-500).

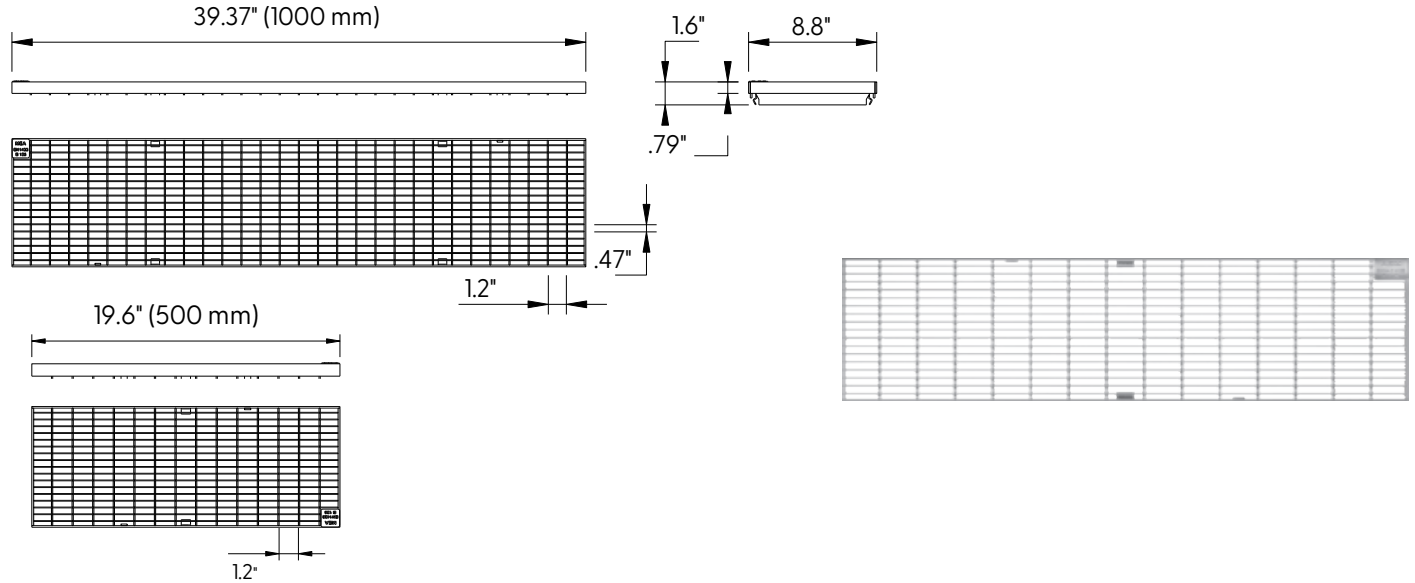

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS A

Compliance



EN 1433 - 3,372 LBS.,  
15kN, 70 PSI

ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGA-3-SM	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGA-3-SM-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGA-3-SM	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGA-3-SM-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 10/29/2021**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.


MIFAB reserves the right to make changes in material and design without formal notice and obligation. **USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880**

Location:



## Galvanized Steel Longitudinal Grate to suit 8" clear opening channels

**Specification:** T200-PGB-13-LS galvanized steel longitudinal grates are independently certified to meet Load Class B tested in accordance with EN 1433 (28,100 lbs. (125kN). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 meter grates are also available in Load Class B (Part # TP200-PGB-13-LS-500).

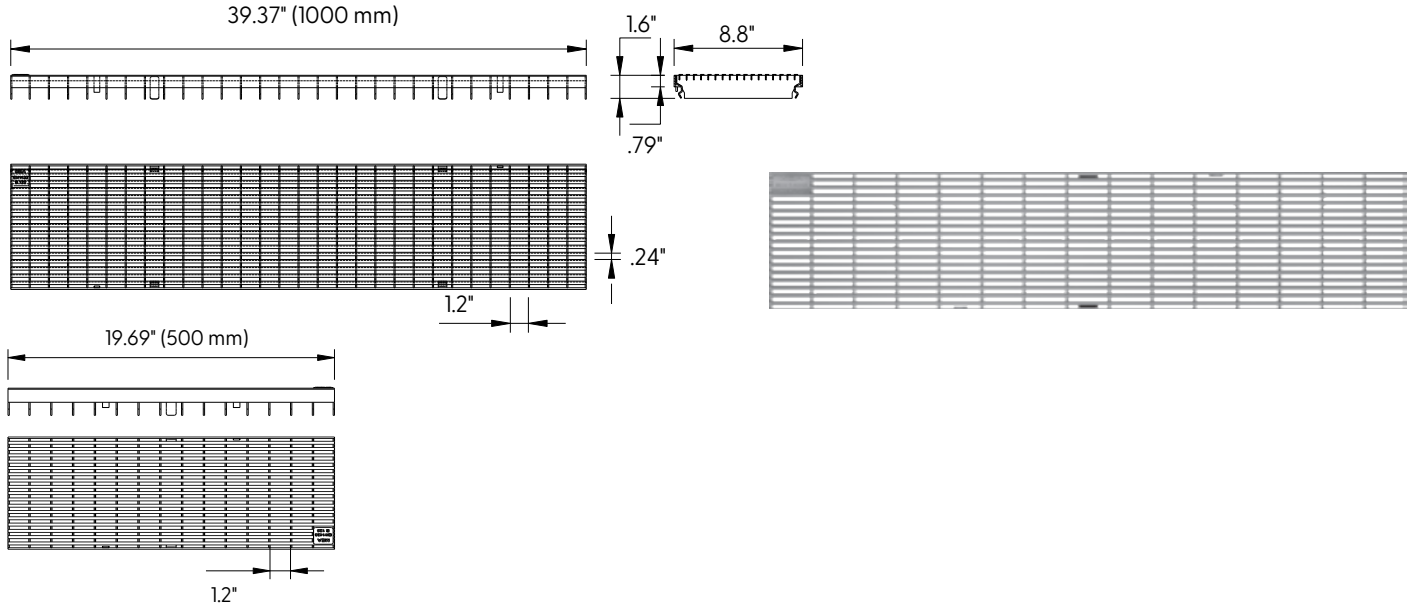

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS B



EN 1433 - 28,100 LBS.,  
125kN, 580 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGB-13-LS	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGB-13-LS-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGB-13-LS	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGB-13-LS-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 10/29/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.


MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

Location:



## Stainless Steel Longitudinal Grate to suit 8" clear opening channels

**Specification:** T200-PGB-3-LS stainless steel longitudinal grates are independently certified to meet Load Class B tested in accordance with EN 1433 (28,100 lbs. (125kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class B (Part # T200-PGB-3-LS-500).

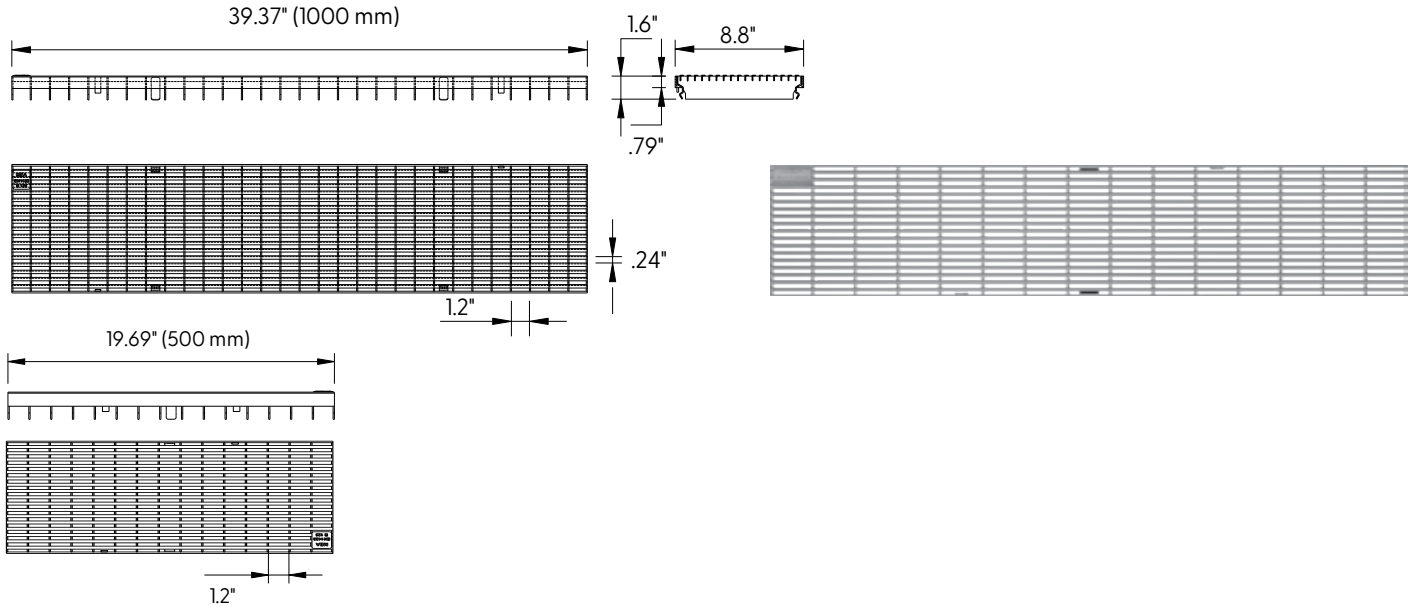

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS B



EN 1433 - 28,100 LBS.,  
125kN, 580 PSI

Compliance



ADA

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGB-3-LS	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGB-3-LS-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGB-3-LS	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGB-3-LS-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 10/29/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880


Location:



## Galvanized Steel Mesh Grate to suit 4" clear opening channels



**Specification:** T200-PGC-13-GM galvanized steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN)). The grate length is 39.40" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.70" (0.5m) grates are also available in Load Class A (Part # T200-PGC-13-GM-500).

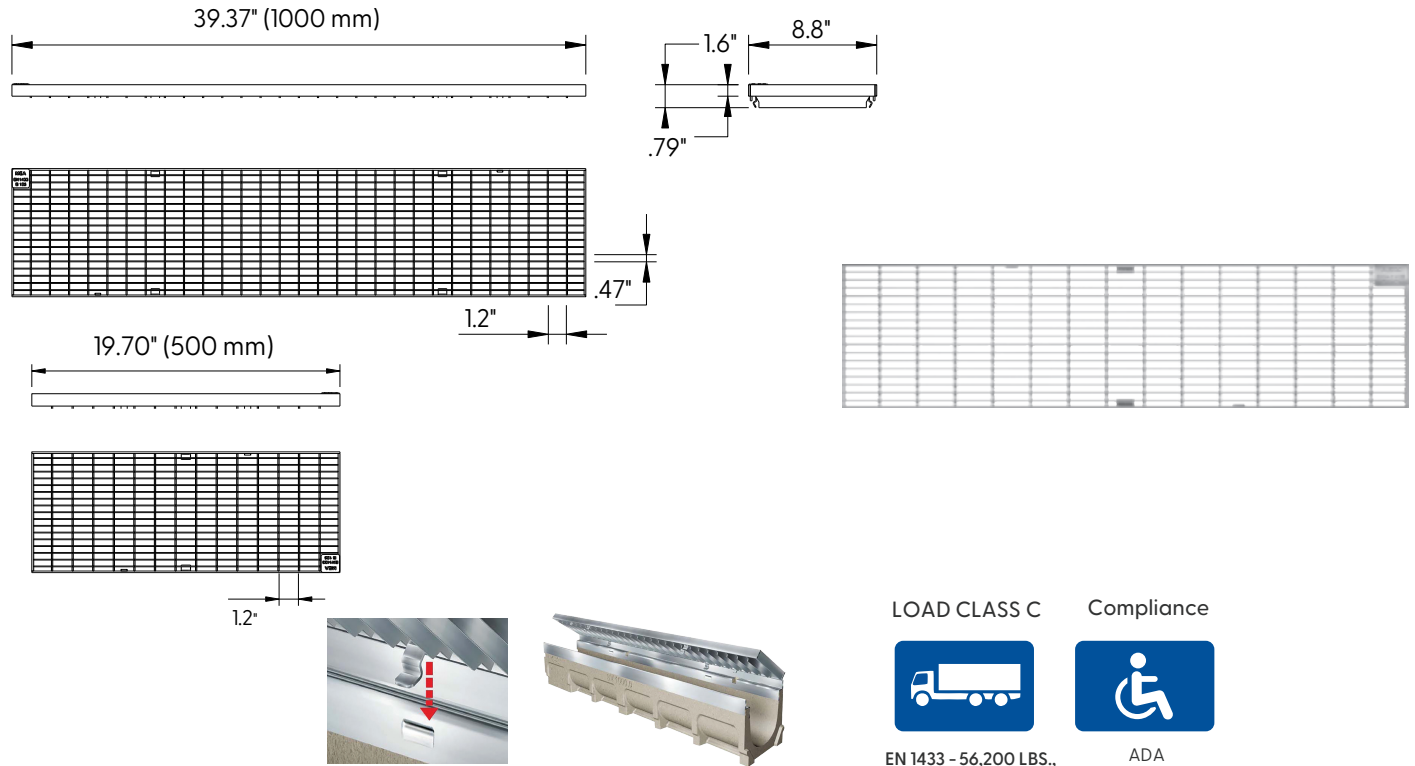

LOAD CLASS C

Compliance



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

ADA

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-13-GM	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGC-13-GM-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-13-GM	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGC-13-GM-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 11/08/2021**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. **USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880**


Location:



## Stainless Steel Mesh Grate to suit 4" clear opening channels



**Specification:** T200-PGC-3-SM stainless steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs. 250 The grate length is 39.40" (1m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional .5 m grates are also available in Load Class C (Part # T200-PGC-3-SM-500).

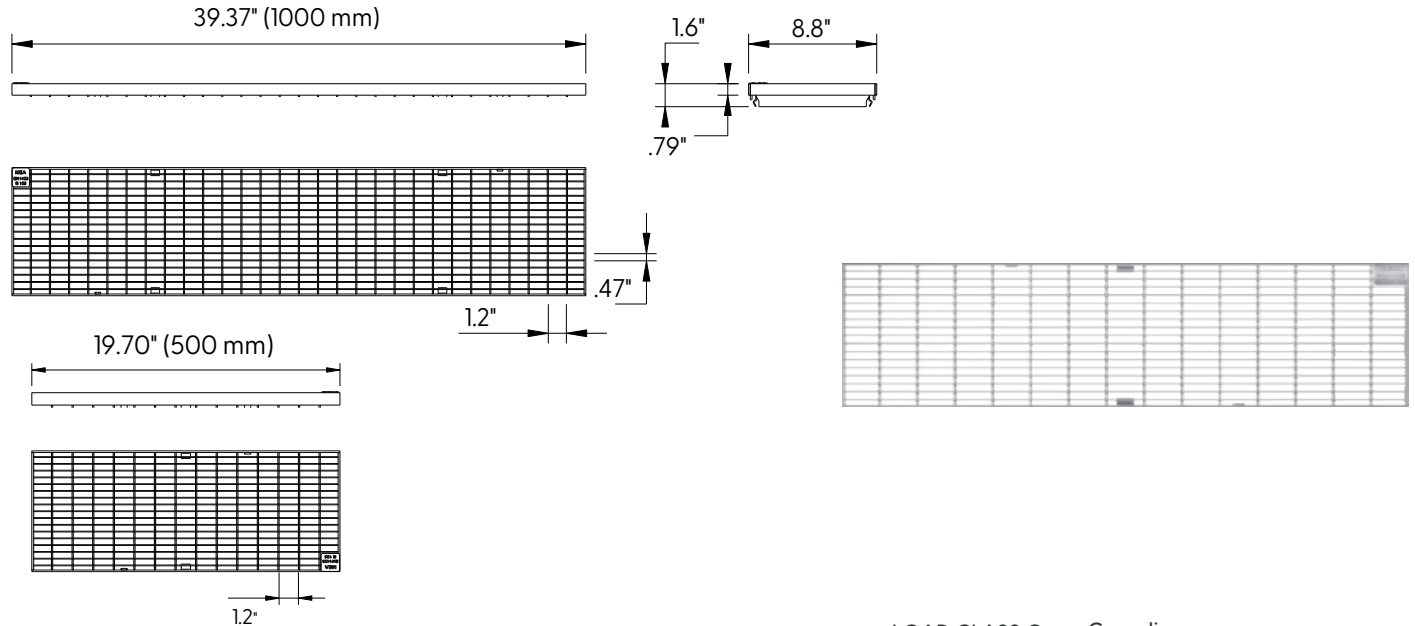

LOAD CLASS C

Compliance



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

ADA

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-3-SM	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGC-3-SM-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-3-SM	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGC-3-SM-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 11/08/2021**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. **USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880**


Location:



## Stainless Steel Bar Grate to suit 8" clear opening channels



**Specification:** T200-PGC-3-SBG galvanized steel mesh grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs (250kN)). The grate length is 39.40" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.70" (0.5m) grates are also available in Load Class A (Part # T200-PGC-3-SBG-500).

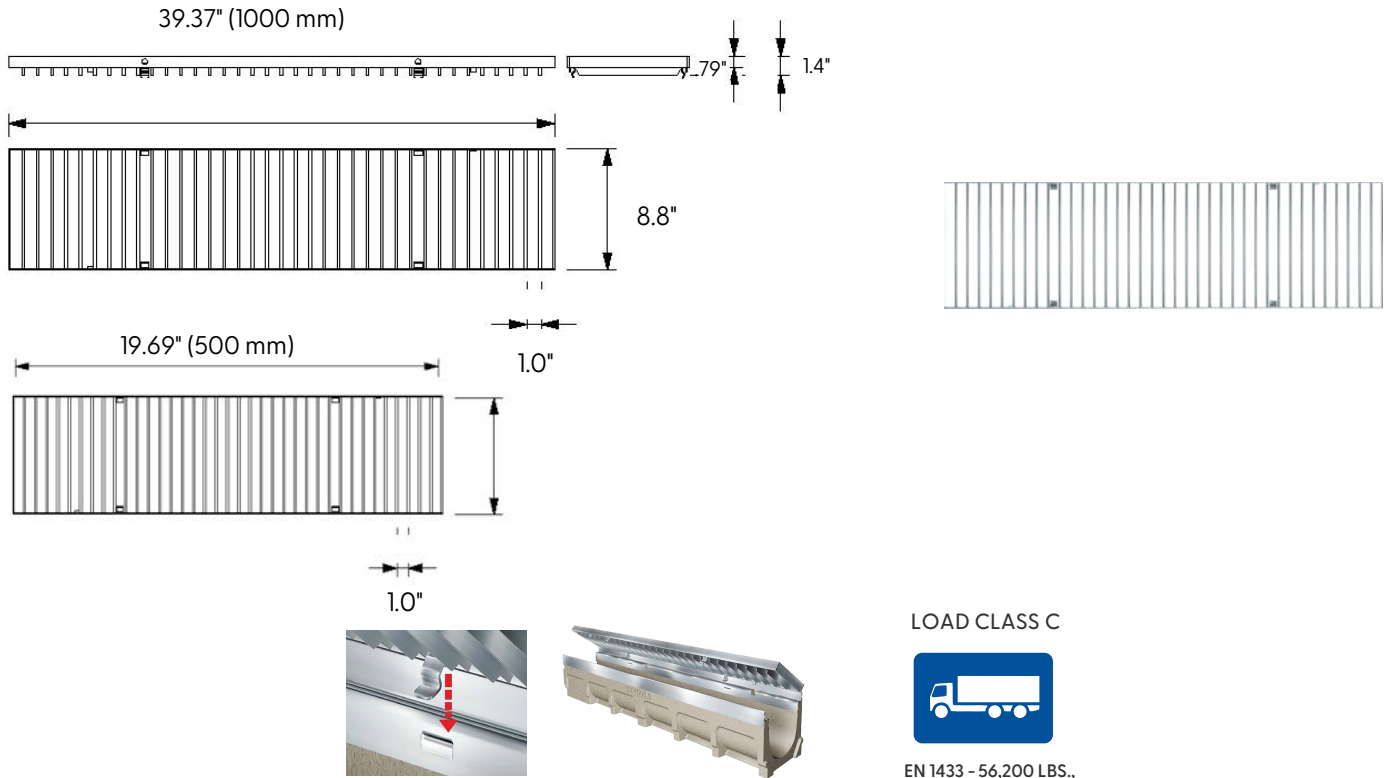

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-3-SBG	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGC-3-SBG-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-3-SBG	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGC-3-SBG-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 2022-01-26**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. **USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880**




Location:



## Galvanized Steel Paverslot Grate to suit 8" clear opening channels



**Specification:** T200-PGC-13-SD galvanized steel paverslot grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs. (250kN)). The grate length is 39.37" (1 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (0.5m) grates are also available in Load Class C (Part # T200-PGC-13-SD-500).

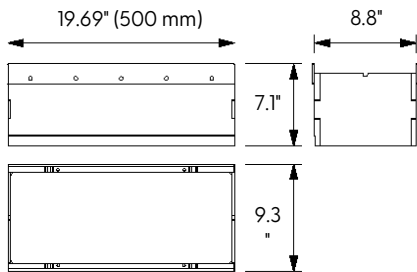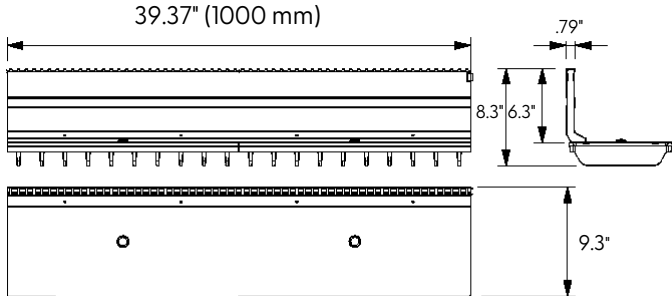

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-13-SD	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGC-13-SD-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-13-SD	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGC-13-SD-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880





Location:



## Stainless Steel Paverslot Grate to suit 8" clear opening channels



**Specification:** T200-PGC-3-SD stainless steel paverslot grates are independently certified to meet Load Class C tested in accordance with EN 1433 (56,200 lbs. (250kN)). The grate length is 39.37" (1m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection. Optional 19.69" (0.5m) grates are also available in Load Class C (Part # T200-PGC-3-SD-500).

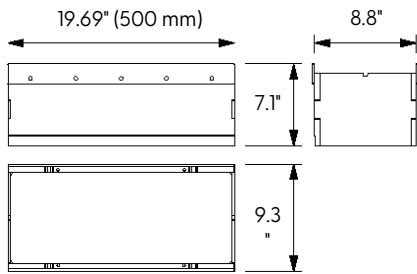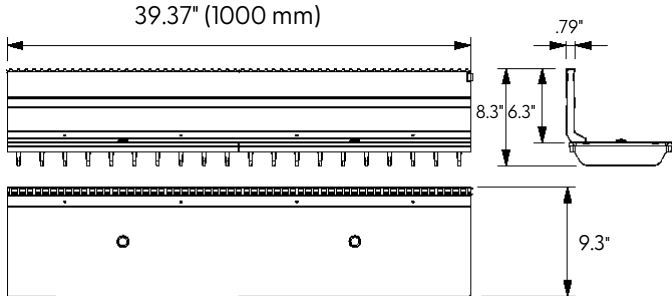

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-3-SD	39.37" (1000 mm)	T1700 Concrete Channel
T200-PGC-3-SD-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-3-SD	39.37" (1000 mm)	T2000 Plastic Channel or T1360 Aluminum Channel
TP200-PGC-3-SD-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880





Location:



## Ductile Iron Slotted Grate to suit 8" clear opening channels



**Specification:** T200-PGC-4 ductile iron grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

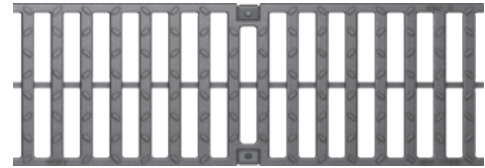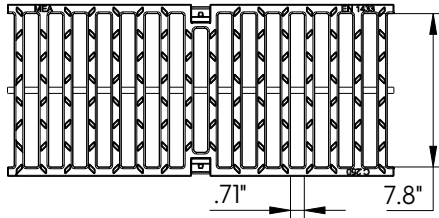

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-4	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-4	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880


Location:



## Ductile Iron Slotted Heelproof Grate to suit 8" clear opening channels



**Specification:** T200-PGC-4-HP ductile iron slotted heelproof grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

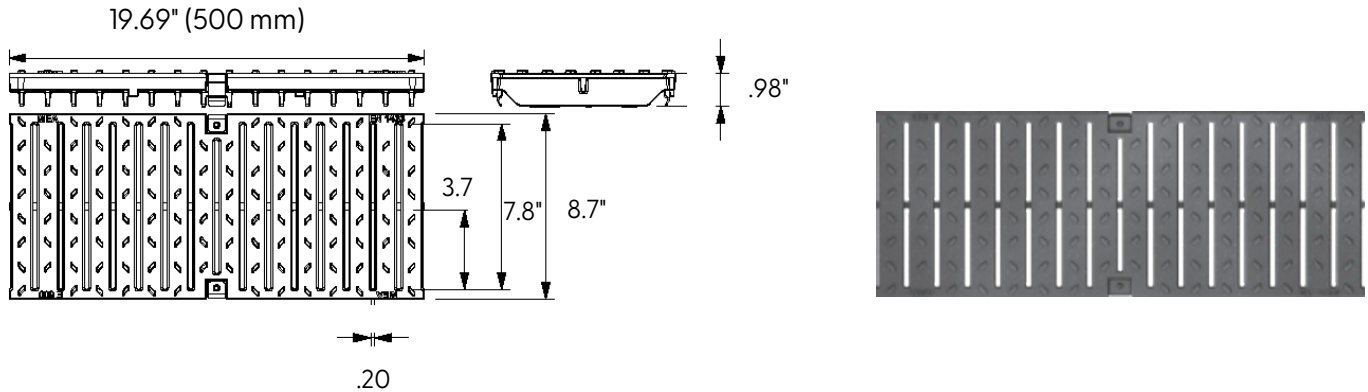

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

Compliance



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-4-HP	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-4-HP	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880



Location:



## Ductile Iron Wave Grate to suit 8" clear opening channels



**Specification:** T200-PGC-WVY ductile iron grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

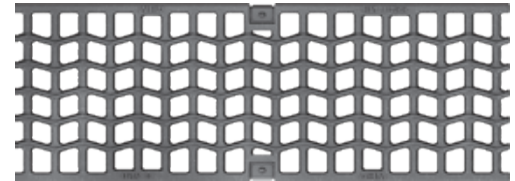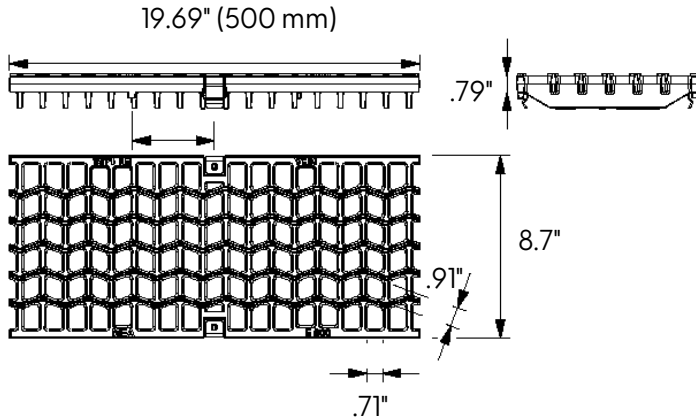

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-WVY	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-WVY	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880


Location:



## Ductile Iron Bavaria Grate to suit 8" clear opening channels



**Specification:** T200-PGC-4-BG ductile iron bavaria grates are independently certified to meet Load Class C tested in accordance with EN 1433 56,200 lbs. 250kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

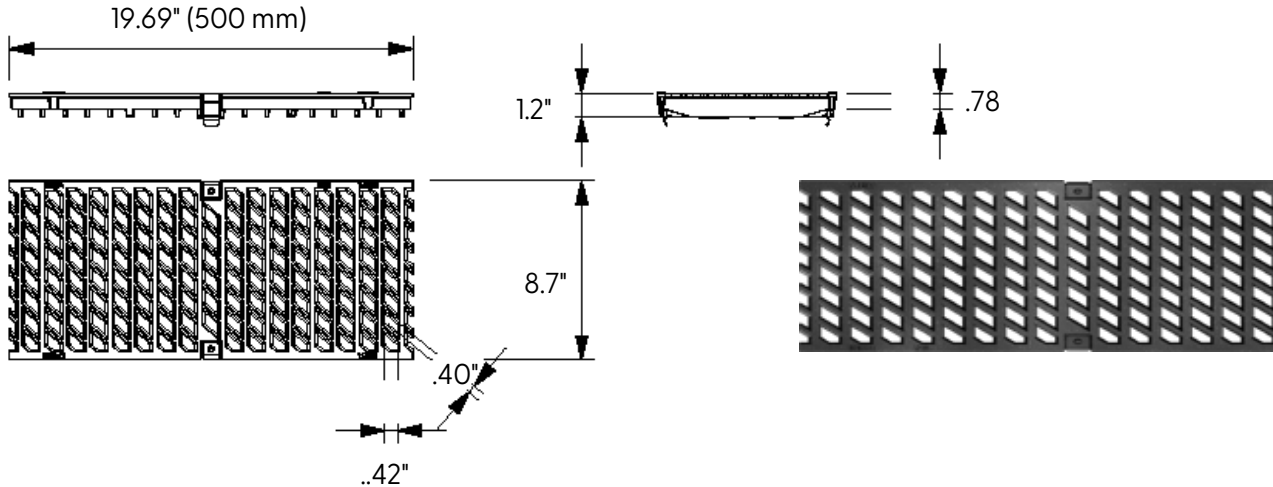

LOAD CLASS C



EN 1433 - 56,200 LBS.,  
250kN, 1160 PSI

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGC-4-BG	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGC-4-BG	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880


Location:



## Galvanized Steel Maintenance Unit Paverslot Grate to suit 8" clear opening channels



**Specification:** T200-PGE-13-MU-500 galvanized steel maintenance unit paverslot grates are independently certified to meet Load Class E tested in accordance with EN 1433 (134,800 lbs. (600kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

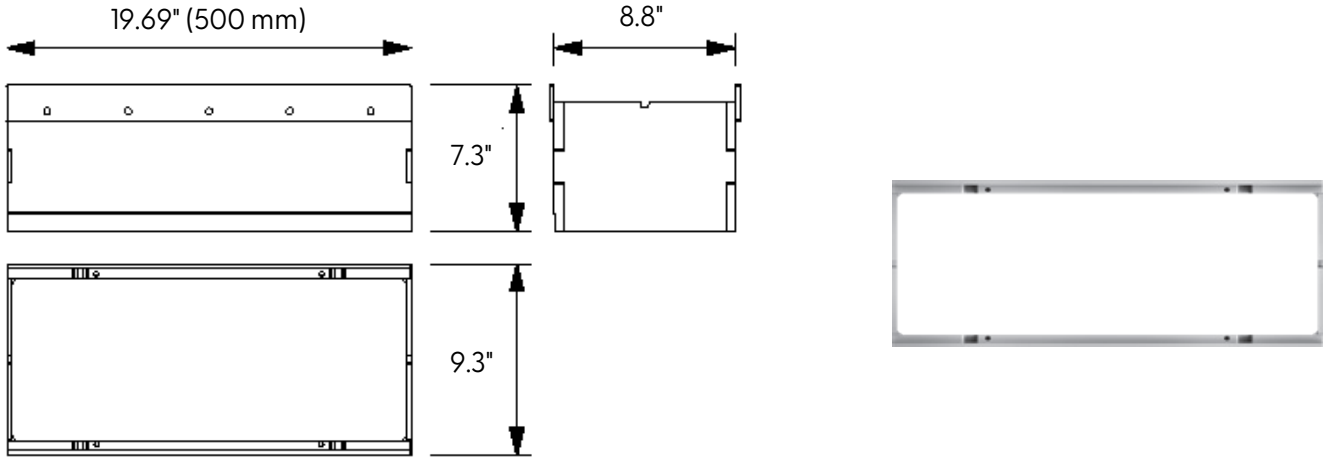

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-13-MU-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-13-MU-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.


Location:



## Stainless Steel Maintenance Unit Paverslot Grate to suit 8" clear opening channels



**Specification:** T200-PGE-3-MU-500 stainless steel maintenance unit paverslot grates are independently certified to meet Load Class E tested in accordance with EN 1433 (134,800 lbs. (600kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

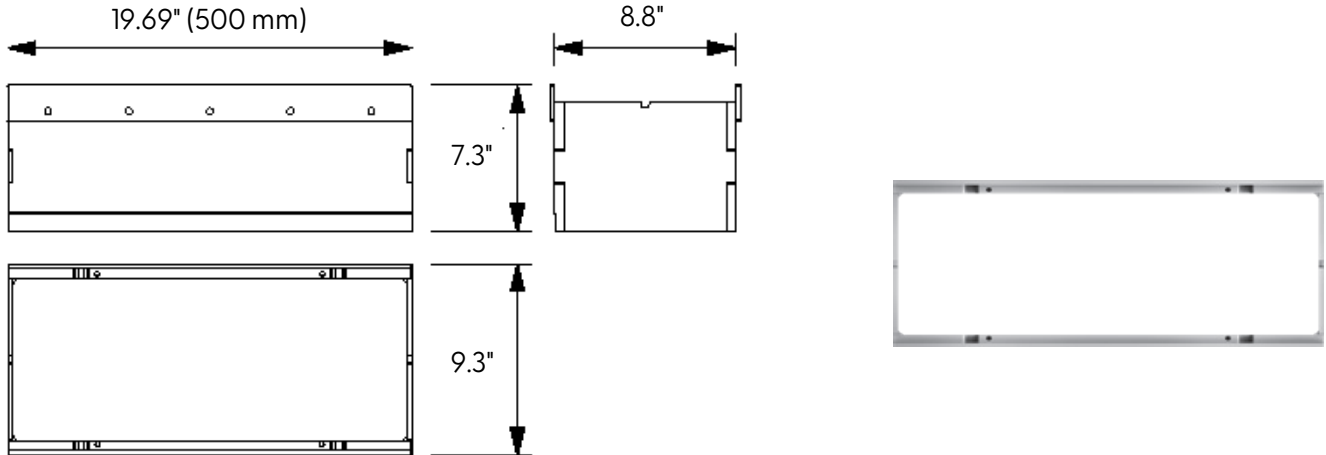

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-3-MU-500	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-3-MU-500	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.




MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

Location:



## Ductile Iron Slotted Grate to suit 8" clear opening channels

**Specification:** T200-PGE-4 ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

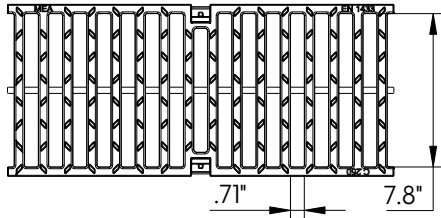

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-4	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-4	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

**Revision Date: 10/29/2021**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. **USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880**






Location:



## Galvanized Ductile Iron Slotted Grate to suit 8" clear opening channels



**Specification:** T200-PGE-4-13 galvanized ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

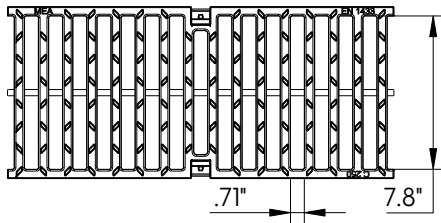

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-4-13	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-4-13	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880


Location:



## Ductile Iron Slotted Heelproof Gate to suit 8" clear opening channels



**Specification:** T200-PGE-4-HP ductile iron slotted heelproof grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs., 600 kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

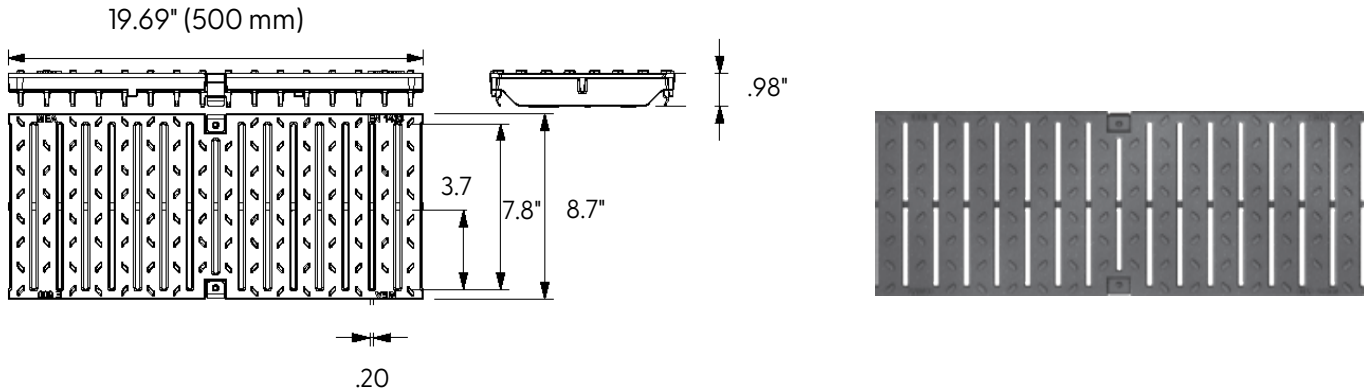

**CLIPFIX ADVANTAGE**

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS E



EN 1433  
134,800 LBS.,  
600kN, 2,785 PSI

Compliance



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-4-HP	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-4-HP	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.


MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

Location:



## Ductile Iron Longitudinal Grate to suit 8" clear opening channels

**Specification:** T200-PGE-4-ADA ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

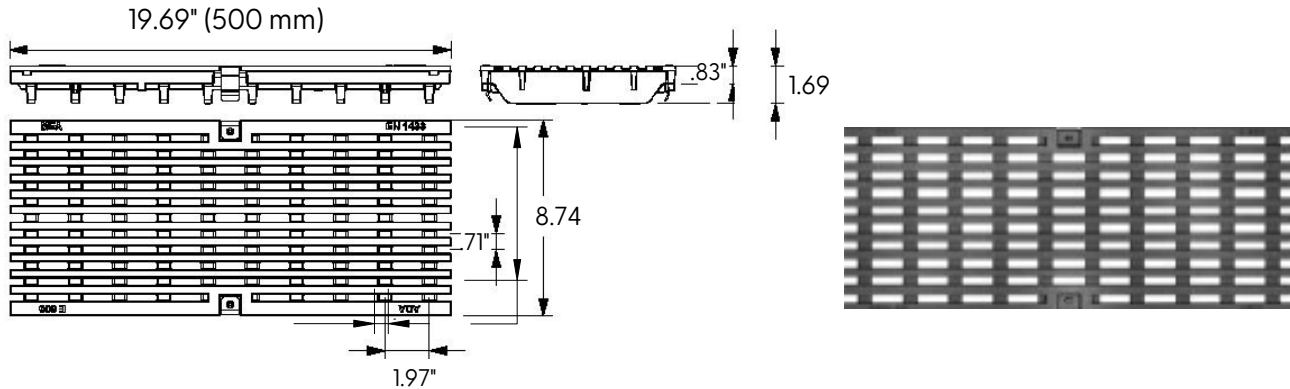

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

### LOAD CLASSE



EN 1433 - 134,800 LBS.,  
600kN, 2,785 PSI

### Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-4-ADA	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-4-ADA	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 12/07/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.





MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

Location:



## Ductile Iron Longitudinal Grate to suit 8" clear opening channels

**Specification:** T200-PGE-4-ADA-13 galvanized ductile iron grates are independently certified to meet Load Class E tested in accordance with EN 1433 134,800 lbs. 600kN. The grate length is 19.69" (.5 m). The grates utilize the patented "Clipfix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

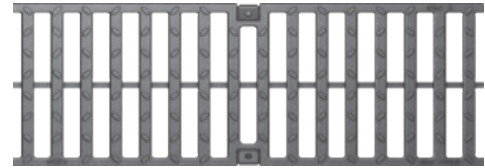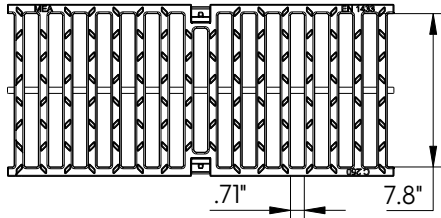

### CLIPFIX ADVANTAGE

The MEA polymer concrete and GRP channels are designed for our universal CLIPFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASSE



EN 1433 - 134,800 LBS.,  
600kN, 2,785 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGE-4-ADA-13	19.69" (500 mm)	T1700 Concrete Channel
TP200-PGE-4-ADA-13	19.69" (500 mm)	T2000 Plastic Channel or T1360 Aluminum Channel

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_

Revision Date: 12/02/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880






Location:



# Ductile Iron Slotted Grate to suit 8" clear opening channels



**Specification:** T200-PGF-4 ductile iron grates are independently certified to meet Load Class F tested in accordance with EN 1433 (202,320 lbs. (900kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

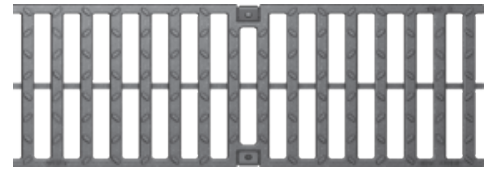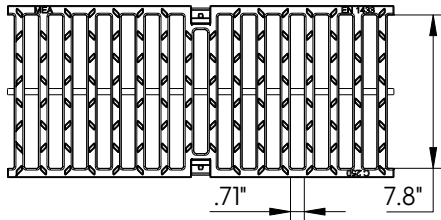

### PROFIX ADVANTAGE

The MEA polymer concrete channels with ductile iron grates have been designed for our universal PROFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS F



EN 1433  
202,320 LBS.,  
900kN, 1160 PSI

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGF-4	19.69" (500 mm)	T1700 Concrete Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 11/08/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880






Location:



## Ductile Iron Slotted Grate to suit 8" clear opening channels



**Specification:** T200-PGF-4-ADA ductile iron grates are independently certified to meet Load Class F tested in accordance with EN 1433 (202,320 lbs. (900kN)). The grate length is 19.69" (.5 m). The grates utilize the patented "Profix" grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

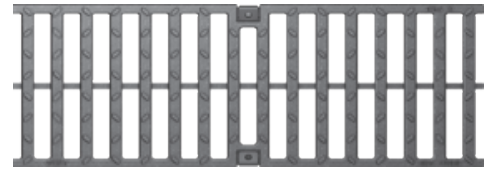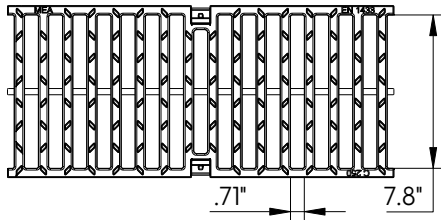

**PROFIX ADVANTAGE**

The MEA polymer concrete channels with ductile iron grates have been designed for our universal PROFIX grate locking mechanism. The system (channel and grate) provides longitudinal shift protection.

LOAD CLASS F



EN 1433 - 202,320 LBS.,  
900kN, 1160 PSI

Compliance



ADA



HEELPROOF

GRATE MODEL NUMBER	LENGTH	USED WITH
T200-PGF-4-ADA	19.69" (500 mm)	T1700 Concrete Channel

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____

Revision Date: 12/02/2021

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880