

Location: _____




BV1000-HS

CAST IRON HORIZONTAL BACKWATER VALVE WITH HUB AND SPIGOT CONNECTION AND STAINLESS STEEL FLAPPER

Specification: MIFAB® Series BV-1000-HS lacquered cast iron backwater valve with hub and spigot outlet connection, gasketed bolted cover, and stainless steel flapper. **Note:** the 2" and 3" models have plastic flappers.

Function: Used in main branch or sewer lines to prevent backflow from the sewers. Full opening access through cover to the flapper assembly for repair and maintenance.

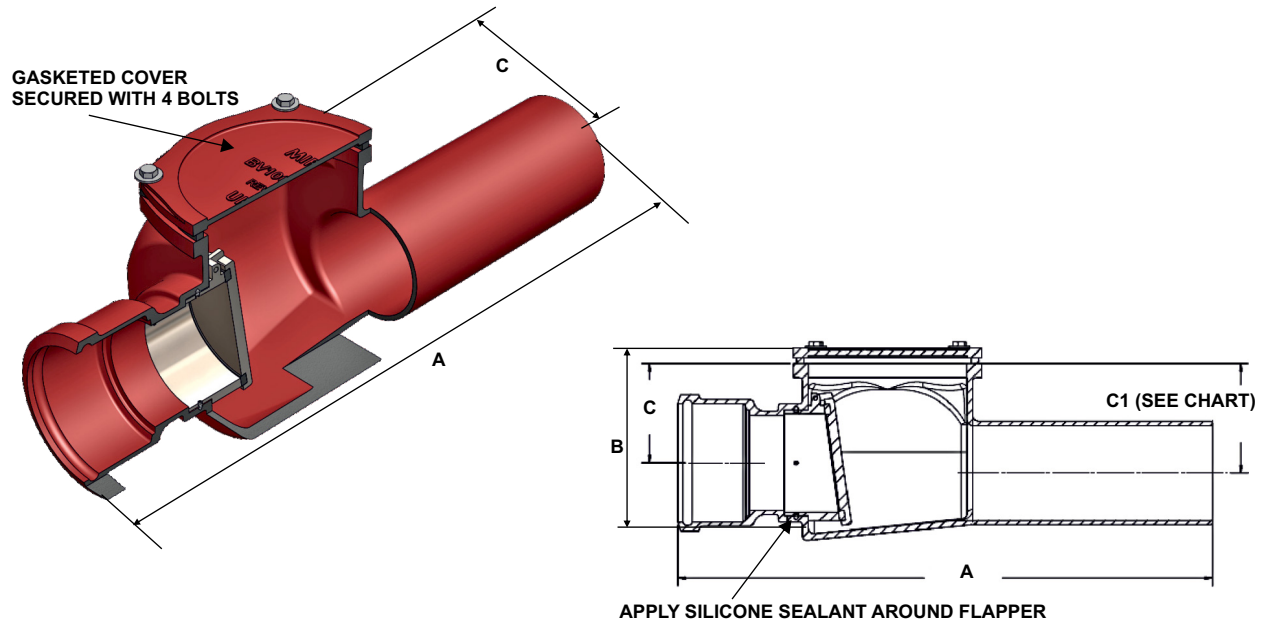

Note: The BV1015-HS can also be installed with hub and spigot extra heavy duty pipe.

Note: Do not use for pressurized applications; for gravity flow only. Backflow protection is prevented when the valve is obstructed by debris or sludge; clean regularly.

MODEL #	CONNECTION SIZE	WEIGHT (Lbs.)	LENGTH "A"	HEIGHT "B"	OUTLET "C"	INLET "C1"
BV1002-HS	2" Hub and Spigot	18	19 7/16"	5 11/16"	2 5/8"	3 1/4"
BV1003-HS	3" Hub and Spigot	30	21 3/16"	7"	3 5/8"	4 1/16"
BV1004-HS	4" Hub and Spigot	38	22 5/16"	8"	4 1/8"	4 9/16"
BV1006-HS	6" Hub and Spigot	63	24 9/16"	11 1/4"	5 13/16"	6 5/16"
BV1008-HS	8" Hub and Spigot	90	27 1/4"	13 3/16"	7"	7 3/8"
BV1010-HS	10" Hub and Spigot	145	30"	15 7/16"	8 1/8"	8 5/8"
BV1012-HS	12" Hub and Spigot	160	33"	16 5/8"	9 1/4"	9 13/16"
BV1015-HS	15" Hub and Spigot	180	35 15/16"	21"	11 1/8"	11 5/8"

SUFFIX	OPTIONAL VARIATIONS
-13	All Galvanized
-BA	Minimum 51% material cost made in the USA
-PA	Pennsylvania Steel Act compliant product

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____