

Location: _____




C1100-TOS

TOP SET® DOUBLE ADJUSTABLE FINISHED FLOOR CLEANOUT

Specification: MIFAB® Series C1100-TOS Top Set® finished floor cleanout with PVC, ABS or lacquered cast iron body, securing and adjustable hardware, and scoriated combined gasketed nickel bronze or stainless steel cover and plug top assembly with stainless steel allen key screws. Cover can be adjusted vertically and side to side after the pour with 1/2" thick composite protective cover and indicating whisker.

Function: Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Replacement of the surface level cover/plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building. The patented MIFAB® Top Set® finished floor cleanout ships complete with a 1/2" thick plastic cover to protect the cleanout during the concrete pour. The installer pours the concrete to the top level of the plastic cap. Channel locks are used to remove the cover after the concrete pour has settled. Then, remove the solid cleanout cover and use a Phillip's head screwdriver to engage the three screws located underneath the cover. Turn the screws the same amount to elevate the cover up to the finished floor. Turn the screws a different amount to tilt the cover to the same angle as the finished floor.

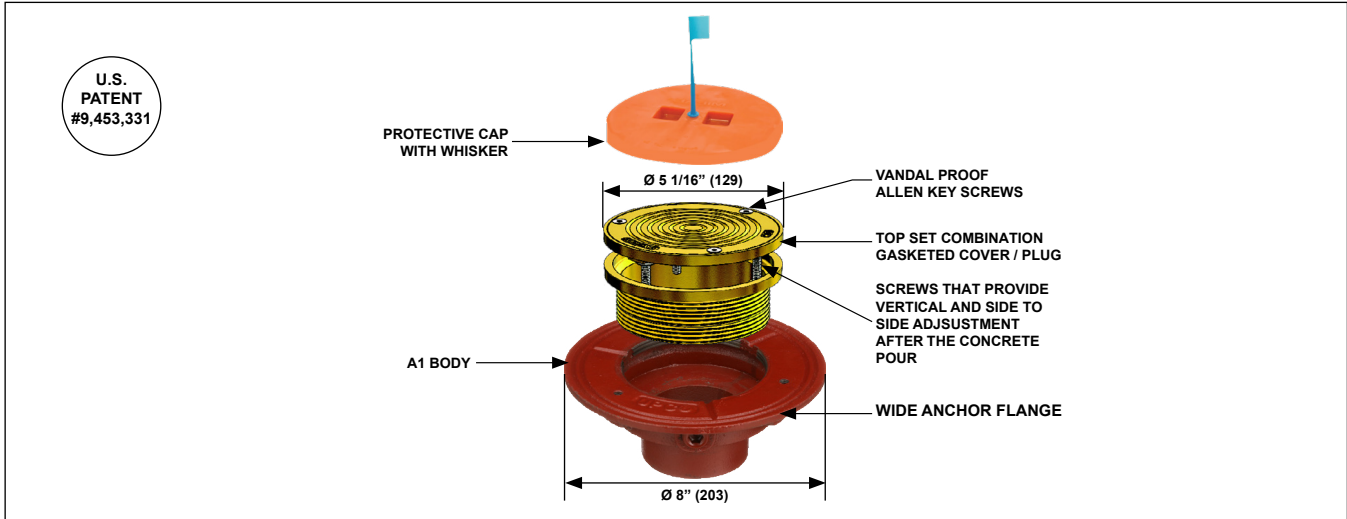

TOP ASSEMBLY DIAMETER	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	LOAD RATING	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
			N.B. (-1)	SS (-3)						
5" (127)	1/2" (13)	2 1/2" (51)	UP TO 2,000 LBS.	5,000 to 7,499 LBS.	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
					3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 1/2" (89)	3 3/4" (95)
					5" (127)	3" (76)	-	2 5/8" (67)	3 3/4" (95)	-
					6" (152)	3 1/2" (89)	6 7/8" (175)	-	-	-

SUFFIX	OPTIONAL VARIATIONS
-3	Stainless Steel Top Assembly
-6	Security screws (TR25 Torx & pin)
-11	Acid resistant epoxy coated body
-13	Galvanized body
-15	Extension
-28	Stainless steel body (Type 304)
-30	PVC socket connection body
-31	ABS socket connection body
-34	Secondary closure plug
-90	Threaded side outlet (2", 3", 4") (cast iron only)
-90NH	No hub side outlet (2", 3", 4") cast iron only

SUFFIX	OPTIONAL VARIATIONS
-95	Special marking etched into top (SAN for sanitary or GW for Grease Waste)
-BA	Minimum 51% material cost made in the USA
-C	Membrane clamp
(Standard)	No hub outlet
P	Push on outlet
-PA	Pennsylvania Steel Act compliant product
-RC	Stainless steel carpet marker
-RCF	Stainless steel carpet flange cover (-1 or -3 only)
T	Threaded outlet (2", 3", 4")
X	Inside caulk outlet
-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____