

Location: \_\_\_\_\_




**C1230-WF**

**FLOOR CLEANOUT FOR WOOD FLOOR INSTALLATIONS**

**Specification:** MIFAB C1230-WF Series lacquered cast iron wood floor cleanout with 1½" (38) wide securing flange, and combined gasketed access cover and plug.

**Function:** Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Cleanout has a non-adjustable top and a 1½" wide securing anchor flange to wood decks.

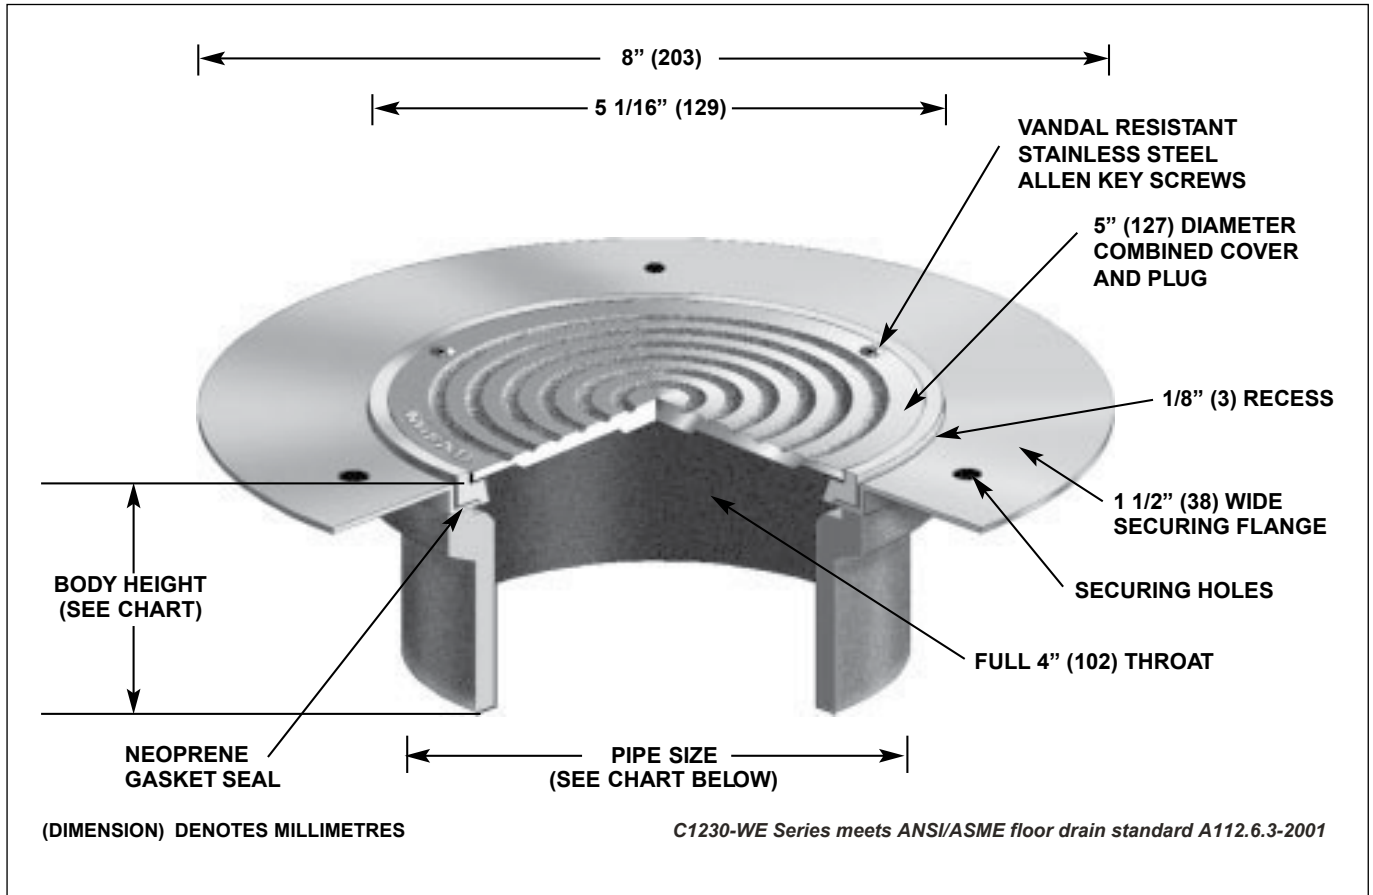

COVER/PLUG DIAMETER	ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT		
	LOAD RATING			CAST IRON BODY (NO HUB OUTLET)	PVC/ABS (-30)/(-31)	CAST IRON BODY (PUSH ON OUTLET)
	N.B. (-1) Lbs.	D.I. (-4) Lbs.				
5" (127)	Up To 4,999	5000 to 7499	2" (51)	2 ½" (64)	2 15/16" (75)	—
			3" (76)	2 ½" (64)	2 15/16" (75)	—
			4" (102)	2 ½" (64)	2 15/16" (75)	3"

Suffix	Description
-1	Nickel bronze top assembly
-4	Extra heavy duty ductile iron top assembly for unfinished areas
-6	Security screws (TR25 Torx & pin)
-11	Acid resistant epoxy coated body
-13	Galvanized body
-30	PVC socket connection body

-31	ABS socket connection body
-95	Special marking etched into top(SAN for sanitary or GW for Grease Waste)
-BA	Minimum 51% material cost made in the USA
-PA	Pennsylvania Steel Act compliant product
P	Push on outlet (4" only)
-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_