


Location: \_\_\_\_\_

**C1230-WF**
**FLOOR CLEANOUT FOR WOOD FLOOR INSTALLATIONS**

**Specification:** MIFAB C1230-WF Series lacquered cast iron wood floor cleanout with 1½" (38) wide securing flange, and combined gasketed access cover and plug.

**Function:** Used in finished floors to provide emergency access to the plumbing lines for removal of blockages. Cleanout has a non-adjustable top and a 1 ½" wide securing anchor flange to wood decks.

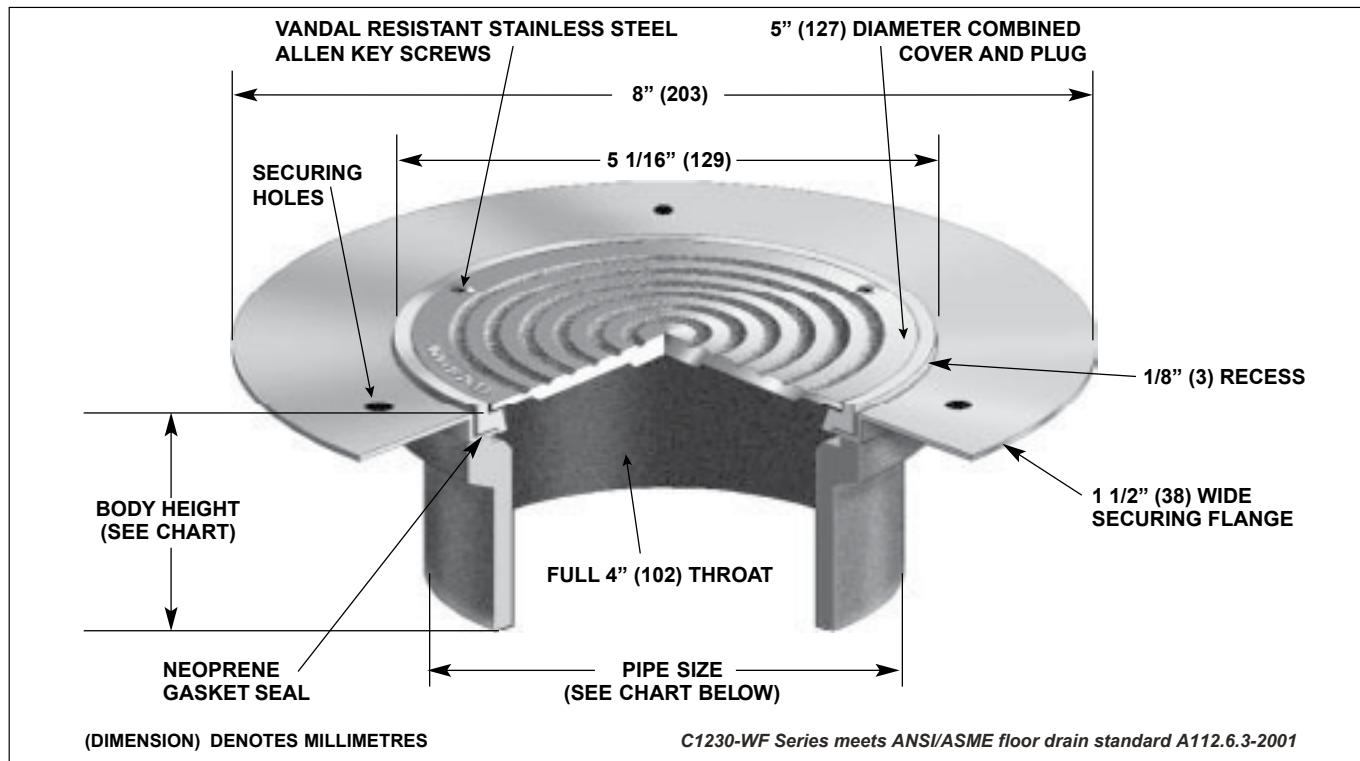

COVER/PLUG DIAMETER	ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	LOAD RATING			CAST IRON BODY (NO HUB OUTLET)	NICKEL BRONZE BODY (-1)	PVC/ABS (-30)/(-31)	CAST IRON BODY (PUSH ON OUTLET)	
	N.B. (-1) Lbs.	D.I. (-4) Lbs.						
5" (127)	Up to 4,999	5,000 to 7,499	2" (51)	2 3/16" (56)	2 3/16" (56)	2 5/8" (67)	—	
			3" (76)	2 3/16" (56)	2 3/16" (56)	2 5/8" (67)	—	
			4" (102)	2 3/16" (56)	2 3/16" (56)	2 5/8" (67)	3" (76)	
			6" (152)	3 1/2" (89)	—	—	3 3/8" (86)	
			8" (203)	3 1/2" (89)	—	—	—	

Suffix	Description
-1	Nickel bronze top assembly
-4	Extra heavy duty ductile iron top assembly for unfinished areas
-6	Security screws (TR25 Torx & pin)
-11	Acid resistant epoxy coated body
-13	Galvanized body
-30	PVC socket connection body

-31	ABS socket connection body
-95	Special marking etched into top(SAN for sanitary or GW for Grease Waste)
-BA	Buy American Act compliant product
-PA	Pennsylvania Steel Act compliant product
P	Push on outlet (4" only)
-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_  
 Section No: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Purchase Order No: \_\_\_\_\_