

Location: _____




CRTS

**TOP SET® RETROFIT GRATE & FRAME
UNIVERSAL REPLACEMENT ASSEMBLY**

Specification: MIFAB® CRTS(*)(**) (*specify grate diameter, ** specify grate material) Top Set® retrofit grate and frame with allen key vandal resistant stainless steel screws in grate and Phillips head screws within the universal bottom ring for vertical and side to side adjustment.

Function: Used in showers, kitchens, restrooms and any other floor areas. It is designed to replace the 5" or 6" diameter grate from any Zurn, Smith, Josam, Wade, Watts or MIFAB floor drain. Simply remove the existing JaSaWaZ grate, place the CRTS bottom universal ring into the recessed area of the strainer and connect it with the existing JaSaWaZ strainer screws. The CRTS grate and frame can then be adjusted vertically and side to side to meet the finished floor.

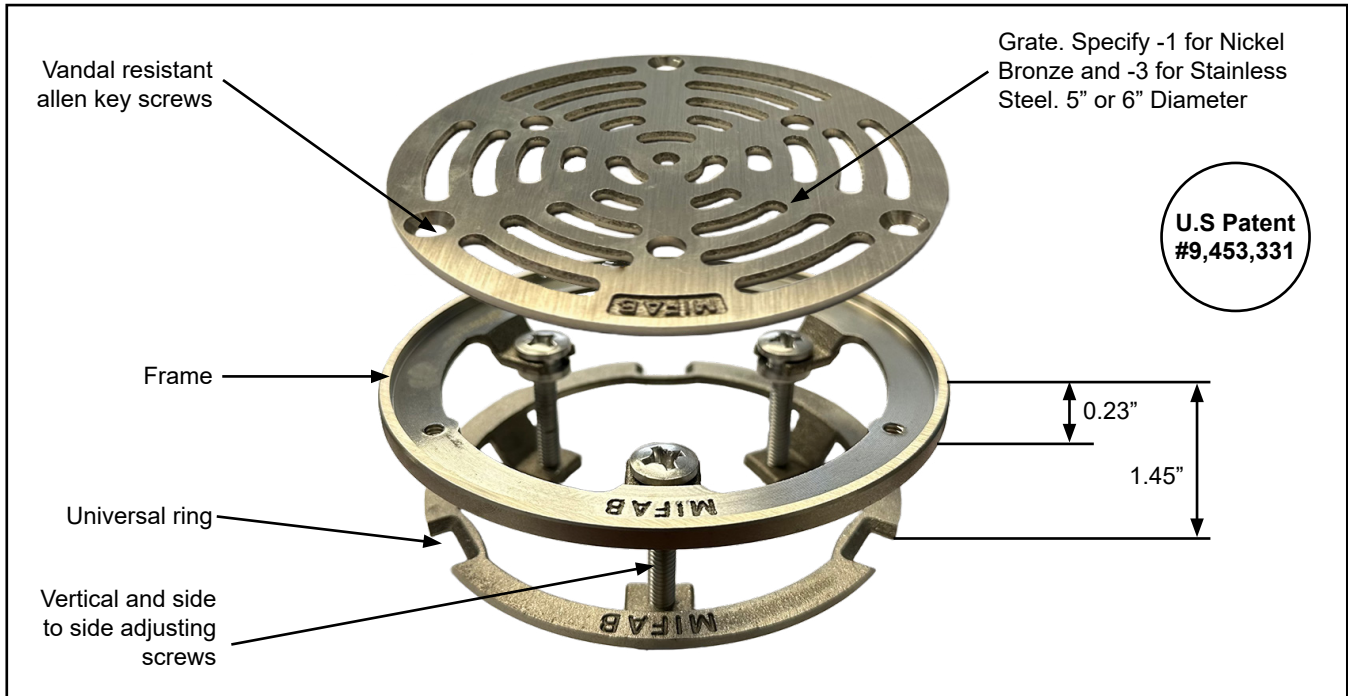

MODEL #	MATERIAL
CRTS5-1	5" Diameter retrofit grate and frame - nickel bronze
CRTS5-3	5" Diameter retrofit grate and frame - stainless steel

MODEL #	MATERIAL
CRTS6-1	6" Diameter retrofit grate and frame - nickel bronze
CRTS6-3	6" Diameter retrofit grate and frame - stainless steel

SUFFIX	DESCRIPTION
-6	Security screws (T-20 Torx & pin)

ADJUSTABILITY: Min = 0.23"; Max = 1.45"

Note: "Phillips" screw driver needed to adjust Top Set screws.

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____