

Location: _____



CS

**1 5/8" STEEL CHANNEL SERIES W/ 6"
ADJUSTABLE 1 7/8" X 1 7/8" SQUARE LEG**

- CS-Vari-Angle Series
- For ductwork, walkways, HVAC equipment, and many more
- Installs on sloped or uneven surfaces
- Adapter leg accommodates 1 5/8" x 1 5/8" steel strut for framing
- Suitable for all roofing types, including sloped
- Strut is available in corrosion-resistant galvanized steel, stainless steel, or aluminum

Function: CS Vari-Angle support is variable angle support designed for ventilation duct, walkway systems, HVAC equipment and many other applications installed on sloped or uneven surfaces. Adapter leg will accommodate 1 5/8" x 1 5/8" steel strut for framing. It is UV resistant and suitable for installation on most types of roofing material and sloped surfaces.




CONSULT WITH A ROOFING CONSULTANT
FOR ALLOWABLE LOADS.

U.S. Patent
No. 7,866,093


**LIMITED
LIFETIME WARRANTY**

**MAY QUALIFY FOR
L.E.E.D CREDITS**

**RECOMMENDED SPACING:
REFER TO LOCAL CODE**

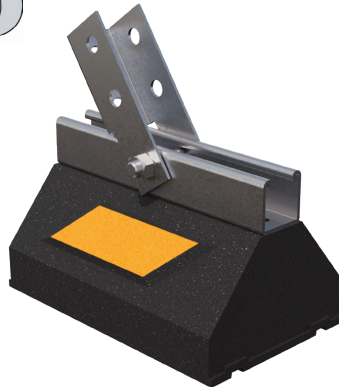

SCAN FOR V-SPEC
VIDEO SPECIFICATION

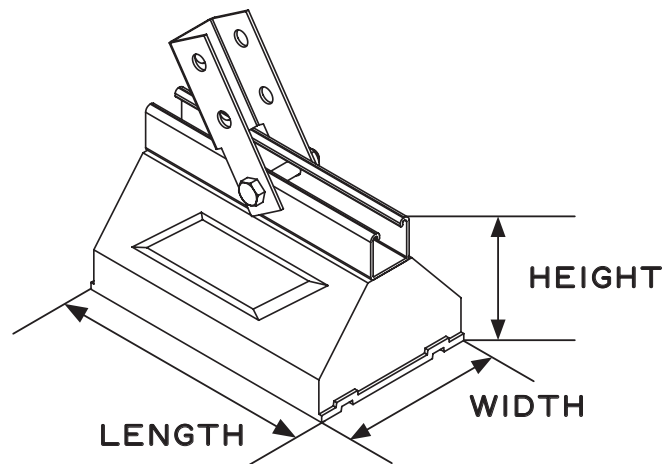

MATERIALS

BASE (C-PORT CXP):
100% RECYCLED RUBBER, UV RESISTANT

STRUT:
12-GAUGE GALVANIZED STEEL STRUT
(1 5/8" HIGH)

VARI-ANGLE BRACKET:
1 7/8" X 1 7/8" 12-GAUGE GALVANIZED STEEL

MODEL NO.	HEIGHT	WIDTH	WEIGHT	LENGTH (L)	MAX. LOAD
CS10	5.6" (142 mm)	6" (152 mm)	7.4 lbs.	9.5" (241 mm)	800 lbs. per 9.5" LENGTH
CS20	5.6" (142 mm)	6" (152 mm)	13.9 lbs.	19.3" (480 mm)	
CS30	5.6" (142 mm)	6" (152 mm)	20.3 lbs.	29" (737 mm)	
CS40	5.6" (142 mm)	6" (152 mm)	26.8 lbs.	38.8" (986 mm)	
CS48	5.6" (142 mm)	6" (152 mm)	33.2 lbs.	48.5" (1232 mm)	

Note: All measurements may vary by +/- 3%

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____