

Location: _____



DCAV

DUAL CHECK VALVE WITH ATMOSPHERIC VENT

Specification: The BEECO DCAV is designed primarily for use on boiler feed lines to prevent backflow contamination when the pressure in the supply line is below the pressure in the boiler feed line. It is designed to be used in either horizontal or vertical applications. It is designed for use under continuous pressure applications. Check with your local inspection authorities for installation requirements.


Ratings: Bronze Body and union connections, with stainless steel and bronze internal construction and plastic polymer seals.

Ratings:

- Maximum working water pressure: 175 psi (12 Bar)
- Temperature Range: 33F to 250F (0.5C to 121C)
- Tested and approved to ASSE 1012-2009 and CSA B64.3-11 and IAPMO listed.
- Not for use with potable water

Features:

- Union connections available as either IPS (NPT) or sweat connections.
- Can operate either horizontally or vertically.

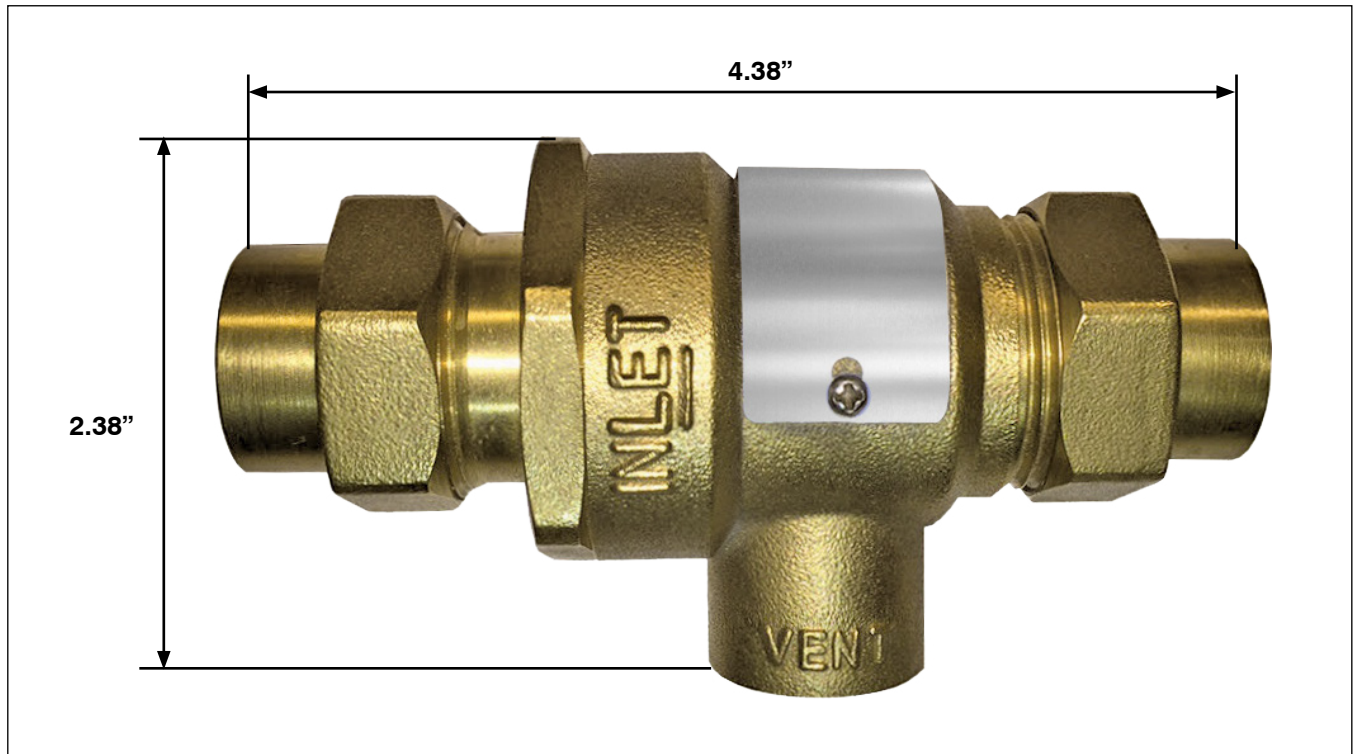

Model No.	Size	Connection Type
DCAV.50-NPT	1/2"	NPT X NPT
DCAV.50-SWT	1/2"	SWT X SWT
DCAV.75-NPT	3/4"	NPT X NPT
DCAV.75-SWT	3/4"	SWT X SWT



Valve is tested and certified to A.S.S.E Standard 1024 and CSA 64.6, listed with I.A.P.M.O and certified to cUPC®

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB® reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880