

LIL MAX EXTENSIONS INSTALLATION


Each extension provides up to 9" of height extension. If more than 9" of extension is required, stack multiple extension assemblies.

YOU NEED:

- SELF ADHESIVE FOAM GASKET (10 FT.)
- (4) SELF TAPPING SCREWS
- (2) LONG AND SHORT BOLTS
- FLAT AND LOCK WASHER, NUTS


EQUIPMENT REQUIRED:

- UTILITY KNIFE
- HAND DRILL WITH 3/8" BIT WRENCH OR SOCKET KEY



STEP 1:

Measure the height from the top of the interceptor to the desired ground level.

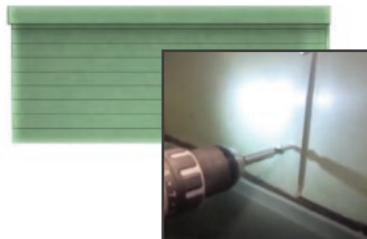


STEP 2:

Cut extension to meet required length. Connect the 2 extension halves by using the self tapping screws. (To avoid injury during inside cleaning, tap the screws from inside out).



STEP 3:

Remove the lid and make a couple of holes in the middle of the long rails of the top interceptor (close to the center pins).



STEP 4:

Attach the self-adhesive foam gasket on all sides of the top rail of the interceptor.



STEP 5:

Attach the extension by aligning its edges with the top rail of the interceptor (make sure that all extension edges are sitting onto foam gasket).



STEP 6:

Slide the bolts through the top hole of the extension and interceptor hole made in Step 3. Place the lock washer under the bolt head. Use the flat washer and nut to tighten and assemble. Do the same for the opposite side. Choose the bolt length accordingly with the height of extension.



STEP 7:

Attach the lid on top of the extension and secure with rotating lockers.