

Location: _____




F100-C-TS

TOP SET® ROUND DOUBLE ADJUSTABLE FLOOR DRAIN W/FLANGE, CLAMP & COVER

Specification: MIFAB® Series F100-C-TS (*specify strainer diameter) MIFAB Top Set® finished floor drain with lacquered cast iron body and water proofing membrane clamp, securing and adjustable hardware, allen key vandal resistant stainless steel grate screws and nickel bronze heelproof strainer that can be adjusted vertically and side to side after the pour with 1/2" thick composite strainer protective cover and indicating whisker. 1/2" Trap Seal Primer tapping included with all bodies.

Function: Used in showers, kitchens, restrooms, and other membrane finished areas. Round adjustable heelproof strainer is used for all types of poured finished floors. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and the three Phillips head screws underneath the grate can be engaged to raise the strainer vertically and to also adjust it side to side.

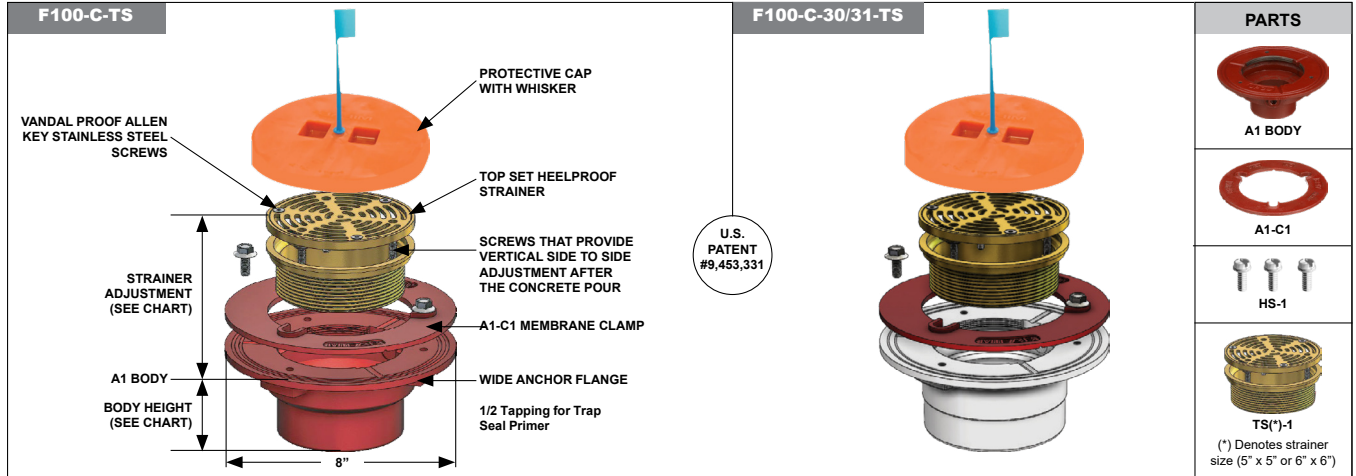

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT		
	MIN	MAX	LOAD RATING				NO HUB (STANDARD)	PUSH ON (P)	PVC/ABS (-30)/(-31)
			FREE AREA	NB (-1) Lbs.	SS (-3) Lbs.				
5" (127)	1/2" (13)	2 1/2" (51)	8 in ² (5200 ²)	2000 to 4999	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 15/16" (75)
6" (152)	11/16" (17)	2 1/2" (51)	9 in ² (5800 ²)	2000 to 4999	5000 to 7499	3" (76)	3" (76)	3 3/8" (86)	3 3/4" (95)
						4" (102)	3" (76)	3 3/8" (86)	3 3/4" (95)

SUFFIX	OPTIONAL VARIATIONS
-1	Nickel Bronze Strainer
-3	Stainless Steel Strainer
-6	Security Screws (T-20 Torx and pin)
-15	2" Cast Extension Iron Extension Adapter
-30	PVC socket connection body
-31	ABS socket connection body
-P	Push on outlet body connection

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____