

Location: \_\_\_\_\_




# F1000-TS(\*)-3

## TOP SET® FINISHED FLOOR DRAIN WITH STAINLESS STEEL HEELPROOF STRAINER FOR NON-MEMBRANE FLOOR AREAS

**Specification:** MIFAB® Series F1000-TS(\*)-3 (\*specify strainer diameter) MIFAB Top Set finished floor drain with lacquered cast iron body, securing and adjustable hardware, allen key vandal resistant stainless steel grate screws and heavy duty stainless steel heelproof strainer that can be adjusted vertically and side to side after the pour with 1/2" thick composite strainer protective cover and indicating whisker.

**Function:** Used in showers, kitchens, restrooms, and other non-membrane finished areas. Round adjustable heelproof strainer is used for all types of poured finished floors. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and the three Phillips head screws underneath the grate can be engaged to raise the strainer vertically and to also adjust it side to side.

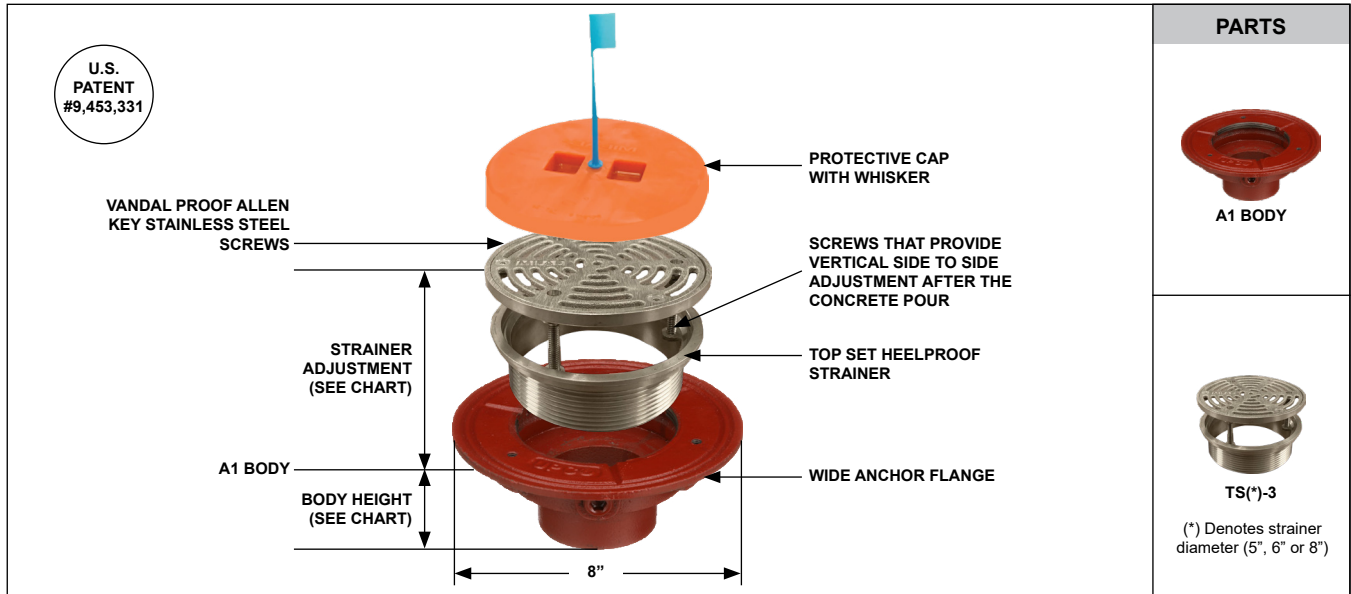

**PARTS**



A1 BODY



TS(\*)-3

(\*) Denotes strainer diameter (5", 6" or 8")

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	LOAD RATING Lbs.			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
			FREE AREA	S.S. (-3)						
5" (127)	1/2" (13)	2 1/2" (51)	8 in² (5200²)	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
6" (152)	11/16" (17)	2 1/2" (51)	9 in² (5800²)	5000 to 7499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
8" (203)	11/16" (17)	3 1/4" (83)	18 in² (11600²)	5000 to 7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
					6" (152)	3 1/2" (89)	6 7/8" (175)	--	--	--

SUFFIX	OPTIONAL VARIATIONS
-5	Sediment bucket
-6	Security screws (T-20 Torx & pin)
-7	1/2" trap seal primer connection
-8	Backwater valve (2", 3", 4")
-11	Acid resistant epoxy coated body
-13	Galvanized body
-15	Extension
-21	Secondary flat stainless steel strainer (2", 3", 4")
-28	Stainless steel body (Type 304)
-30	PVC socket connection body
-31	ABS socket connection body
-34	Closure plug
-40	Underdeck clamp
-41	Sump receiver
-49	Chrome plated strainer
-50	Lacquered cast iron funnel

-90	Threaded side outlet (2", 3", 4") (cast iron only)
-90NH	No hub side outlet (2", 3", 4") (cast iron only)
-95	Client logo
-ARRA	American Iron and Steel Act Compliant
-BA	Minimum 51% material cost made in the USA
-C	Membrane clamp
-C2	High rough-in membrane clamp (min. 1 9/16" (40))
-F4	4" Round funnel
-F6	6" Round funnel
-G	Oval 4" x 9" funnel
-J	6" x 3" x 1" funnel
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
P	Push on outlet
-PA	Pennsylvania Steel Act compliant product
T	Threaded outlet (2", 3", 4")
X	Inside caulk outlet
-Z	Extended wide elastomeric flang

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_