


## FLOOR DRAIN WITH SPANNER WRENCH COVER FOR MEMBRANE FLOOR AREAS

**Specification:** MIFAB<sup>®</sup> Series F1100-C-T(\*)-3 (\* specify strainer diameter) lacquered cast iron floor drain with anchor flange, cast iron membrane clamp with primary and secondary weepholes for waterproofing membrane, and heavy duty, solid, gas tight, spanner wrench, vandal proof, stainless steel cover for secured access. (For non-membrane floors, use MIFAB F1100-T Series.)

**Function:** Used in non-membrane finished areas where irregular drain use is required. Solid, gas tight, spanner wrench, vandal proof, stainless steel cover ensures secure access. Used for all types of poured finished floors.

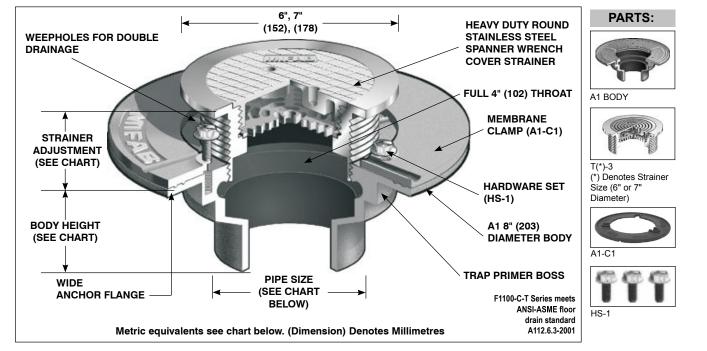

STRAINER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE	BODY HEIGHT					
SIZE			FREE	LOAD RATING	SIZE	NO HUB	PUSH	THREADED	INSIDE	PVC/ABS	
	MIN	MAX	AREA	S.S. (-3)		(STANDARD)	ON (P)	(T)	CAULK (X)	(-30)/(-31	
6" (152)	11/16" (17)	1 1/2" (38)	9 in <sup>2</sup>	5000 to 7499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)	
. ,	. ,	, <i>,</i> ,	(5800 <sup>2</sup> )	LBS.	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
7" (178)	9/16" (14)	1 9/16" (40)	12 in <sup>2</sup>	5000 to 7499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
	3/10 (14)	1 3/10 (40)					0 0/0 (00)			0.014 (00)	
			(7700 <sup>2</sup> )	LBS.	5" (127)	3" (76)		2 5/8" (67)	3 3/4" (95)		
					6" (152)	3 1/4" (83)	6 1/2" (165)				
	SUFFIX OPTIONAL VARIATIONS					SUFFIX	OPTIONAL VARIATIONS				
	-3 Stainless steel strainer (veneer for 9")					-41	Sump receiver				
		ediment bucket	,	,		-49	-49 Chrome Plated Strainer Assembly				
	-6Security screws (T-20 Torx & pin)-71/2" trap seal primer connection-8Backwater valve (2", 3", 4")-11Acid resistant epoxy coated body				-90	Threaded side outlet (2", 3", 4") (cast iron only) No hub side outlet (2", 3", 4") (cast iron only) Client logo Minimum 51% material cost made in the USA					
					-90NH						
					-95						
					-BA						
		alvanized top as	sembly			-G					
	-13 Galvanized body					-J					
	-15 Extension						d) No hub outlet				
	-21 Secondary flat stainless steel strainer (2", 3", 4")				)	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")				
	-28 Stainless steel body (Type 304) -30 PVC socket connection body			Р	Push on outlet Pennsylvania Steel Act compliant product						
				-PA							
	-31 ABS socket connection body					T	Threaded outlet (2", 3", 4")				
	-34 Closure plug -40 Underdeck clamp			×	Inside caulk outlet Extended wide elastomeric flange						
				-Z							

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880