

Location: _____




F1100-C

FLOOR DRAIN

Specification: MIFAB® Series F1100-C (*)-1 (* specify strainer diameter) lacquered cast iron floor drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard satin finished nickel bronze strainer with vandal resistant stainless steel all on key screws (For non-membrane floors, delete -C from Series number).

Function: Used in showers, kitchens, restrooms, and other membrane finished areas. Round adjustable strainer is used for all types of poured finished floors.

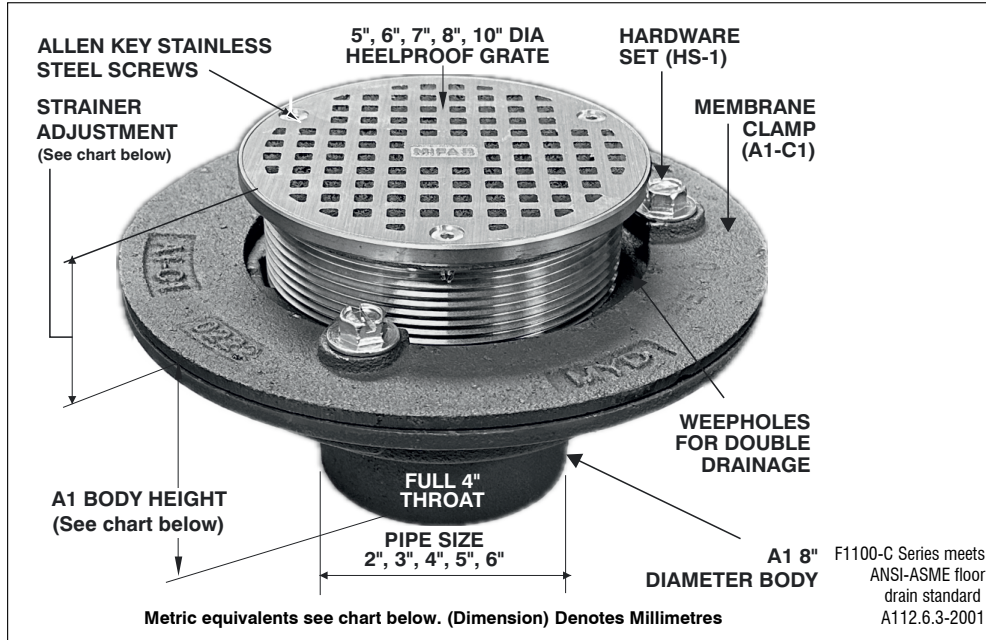

PARTS:




A1 BODY



(*) Denotes strainer diameter (5", 6", 7", 8", or 10")

(**) Denotes strainer finish (-1 or -4)

(*)-(**)



A1-C1



HS-1

F1000-C Series meets ANSI-ASME floor drain standard A112.6.3-211



| STRAINER DIAMETER | STRAINER ADJUSTMENT | | ANSI/ASME RATING | | PIPE SIZE | BODY HEIGHT | | | | |
|----------------------|------------------------|--------------|--|--------------------|--------------|----------------------|----------------|-----------------|---------------------|------------------------|
| | | | FREE AREA | LOAD RATING | | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| | MIN | MAX | | N.B. (-1) | | | | | | |
| 5" (127) | 1/2" (38) | 1 1/2" (38) | 8 in ² (5200 ²) | UP TO 2000 LBS. | 2" (51) | 3" (76) | 3 3/8" (86) | 2 1/4" (57) | 3 3/4" (95) | 2 15/16" (75) |
| 6" (152) | 11/16" (17) | 1 1/2" (38) | 9 in ² (5800 ²) | | 3" (76) | 3" (76) | 3 3/8" (86) | 2 5/8" (67) | 3 3/4" (95) | 3 3/4" (95) |
| 7" (178) | 9/16" (14) | 1 9/16" (40) | 12 in ² (7700 ²) | | 4" (102) | 3" (76) | 3 3/8" (86) | 2 5/8" (67) | 3 3/4" (95) | 3 3/4" (95) |
| 8" (203) | 1 1/16" (17) | 2 1/4" (57) | 18 in ² (11600 ²) | | 5" (127) | 3" (76) | -- | 2 5/8" (67) | 3 3/4" (95) | -- |
| 10" (254) | 1 1/16" (17) | 2 1/4" (57) | 26 in ² (17170 ²) | | 6" (152) | 3 1/4" (83) | 6 1/2" (165) | -- | -- | -- |

SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer - heel proof (standard)
- 4 Ductile iron strainer (5", 7", 8" only)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver

SUFFIX OPTIONAL VARIATIONS

- 49 Chrome plated strainer
- 50 Lacquered cast iron funnel
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo (fabricated in stainless steel)
- BA Minimum 51% material cost made in the USA
- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- (Standard) No hub outlet
- G Oval 4" x 9" funnel
- J 6" x 3" x 1" funnel
- MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange-49 Chrome plated strainer

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____