

Location: _____




F1100-RS

FLOOR DRAIN WITH RECTANGULAR STRAINER FOR NON-MEMBRANE FLOOR AREAS

Specification: MIFAB® Series F1100-RS lacquered cast iron floor drain with anchor flange, weepholes, and "RS" (specify size) rectangular (specify material finish) strainer. (For membrane floors, use MIFAB F1100-C-RS Series.) Please note 5"x17" sized strainer available in stainless steel only. For RS48, grate style is different compared to larger model.

Function: Used in showers, gutters and other non-membrane finished areas where a large grate free area is required and limited width is available.

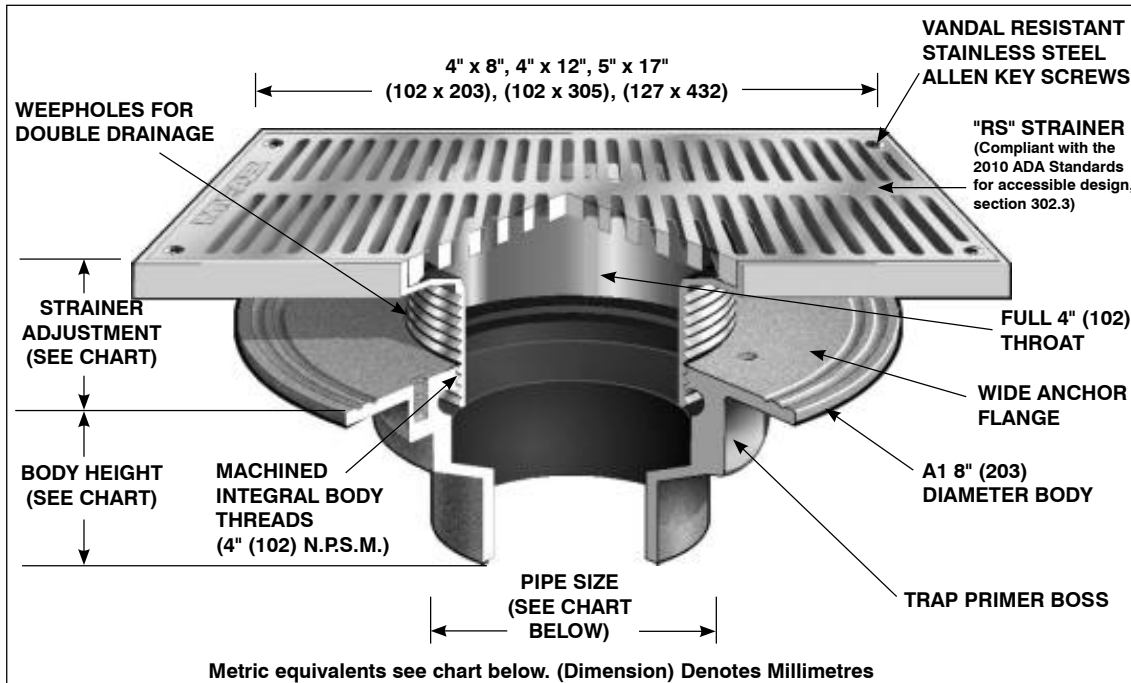

PARTS:



A1 BODY



RS48

RS(*)-(**)
(*) Denotes Strainer Size
(4"x8", 4"x12", or 5"x17")
(**) Denotes Strainer
Finish (-1 or -3)
(-3 only for 5" x 17")

F1100-RS Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

| STRAINER SIZE | STRAINER ADJUSTMENT | | ANSI/ASME RATING | | PIPE SIZE | BODY HEIGHT | | | | |
|-------------------------|---------------------|-------------|--|--------------------------------------|----------------------|----------------------|----------------------------|----------------------------|----------------------------|------------------------------|
| | MIN | MAX | FREE AREA | LOAD RATING N.B. (-1) / S.S. (-3) | | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| 4" x 8" (102 x 203) | 1 1/2" (38) | 2 5/8" (66) | 11.0 in ² (7096 ²) | 5000 to 7499 LBS. | 2" (51) 3" (76) | 3" (76) 3" (76) | 3 3/8" (86) 3 3/8" (86) | 2 1/4" (57) 2 5/8" (67) | 3 3/4" (95) 3 3/4" (95) | 2 15/16" (75) 3 3/4" (95) |
| 4" x 12" (102 x 305) | 1 1/2" (38) | 2 5/8" (66) | 15 in ² (9677 ²) | 5000 to 7499 LBS. | 4" (102) 5" (127) | 3" (76) 3" (76) | 3 3/8" (86) -- | 2 5/8" (67) 2 5/8" (67) | 3 3/4" (95) 3 3/4" (95) | 3 3/4" (95) -- |
| 5" x 17" (127 x 432) | 1 1/2" (38) | 2 5/8" (66) | 18 in ² (11610 ²) | 5000 to 7499 LBS. | 6" (152) | 3 1/4" (83) | 6 1/2" (165) | -- | -- | -- |

SUFFIX OPTIONAL VARIATIONS

| | |
|-----|--|
| -1 | Nickel bronze strainer |
| -3 | Stainless steel strainer |
| -5 | Sediment bucket |
| -6 | Security screws (T-20 Torx & pin) |
| -7 | 1/2" trap seal primer connection |
| -8 | Backwater valve (2", 3", 4") |
| -11 | Acid resistant epoxy coated body |
| -13 | Galvanized body |
| -15 | Extension |
| -21 | Secondary flat stainless steel strainer (2", 3", 4") |
| -28 | Stainless steel body (Type 304) |
| -30 | PVC socket connection body |
| -31 | ABS socket connection body |
| -34 | Closure plug |
| -40 | Underdeck clamp |
| -41 | Sump receiver |

SUFFIX OPTIONAL VARIATIONS

| | |
|------------|--|
| -90NH | No hub side outlet (2", 3", 4") (cast iron only) |
| -95 | Client logo |
| -BA | Minimum 51% material cost made in the USA |
| -C | Membrane clamp for low rough-in (min. 1/2" (13)) |
| -C2 | High rough-in membrane clamp (min. 1 9/16" (40)) |
| -F4 | 4" Round funnel |
| -F6 | 6" Round funnel |
| (Standard) | No hub outlet |
| -G | Oval 4" x 9" funnel |
| -J | 6" x 3" x 1" funnel |
| -MG | MI-GARD Floor Drain Trap Sealer (2", 3" or 4") |
| P | Push on outlet |
| -PA | Pennsylvania Steel Act compliant product |
| T | Threaded outlet (2", 3", 4") |
| X | Inside caulk outlet |
| -Z | Extended wide elastomeric flange |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____