

Location: _____




F1100-TS(*)-1

TOP SET FLOOR DRAIN WITH ROUND ADJUSTABLE STRAINER

Specification: MIFAB® Series F1100-TS(*)-1 (*specify strainer diameter) MIFAB Top Set finished floor drain with lacquered cast iron body, securing and adjustable hardware, allen key vandal resistant stainless steel grate screws and nickel bronze heelproof strainer that can be adjusted vertically and side to side after the pour with 1/2" thick composite strainer protective cover and indicating whisker.

Function: Used in showers, kitchens, restrooms, and other non-membrane finished areas. Round adjustable heelproof strainer is used for all types of poured finished floors. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and the three Phillips head screws underneath the grate can be engaged to raise the strainer vertically and to also adjust it side to side.

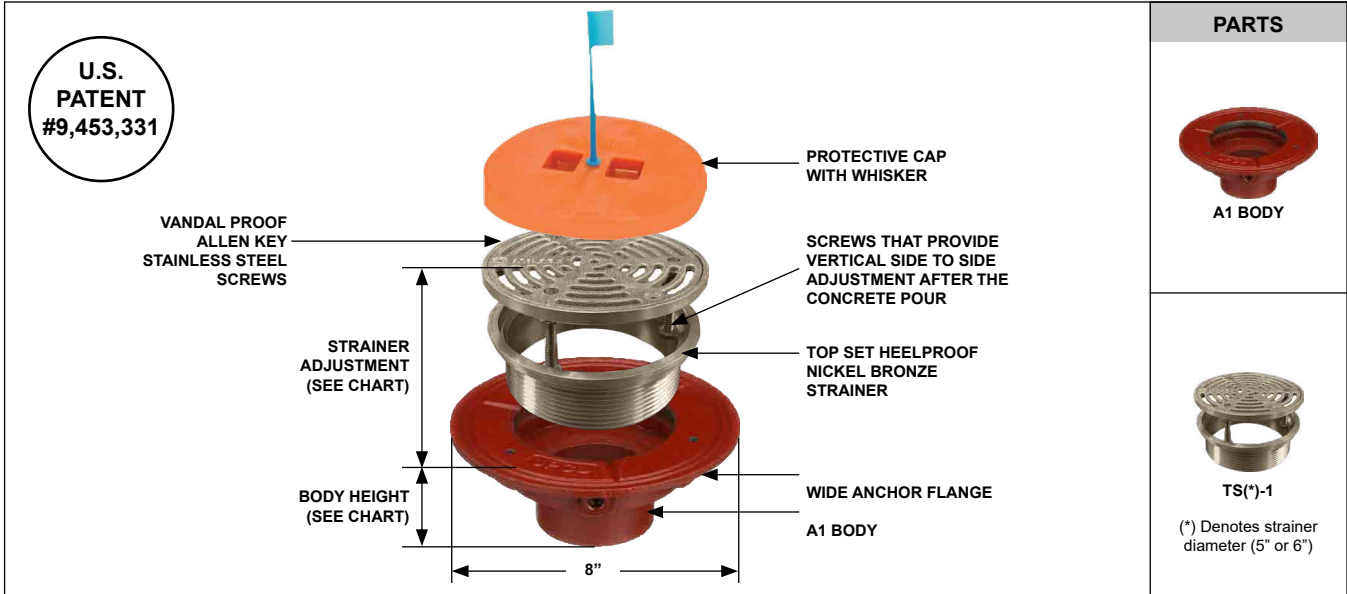

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT				
	MIN	MAX	LOAD RATING (Lbs.)				NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
			FREE AREA	N.B. (-1)	S.S. (-3)						
5" (127)	3/4"	3"	8 in ²	2,000	5,000-7,499	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 5/8" (67)
6" (152)	16/17"	3"	9 in ²	2,000	5,000-7,499	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 1/4" (83)
7" (152)	16/17"	3 1/4"	12 in ²	2,000	5,000-7,499	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 1/2" (89)	3 1/2" (89)
8" (152)	1 1/8"	3 1/4"	18 in ²	2,000	5,000-7,499	5" (127)	3" (76)	--	2 5/8" (67)	6 7/8" (175)	--
10" (152)	1 1/2"	3 3/8"	26 in ²	2,000	5,000-7,499	6" (152)	3 1/2" (89)	6 7/8" (175)	--	--	--

SUFFIX	OPTIONAL VARIATIONS
-5	Sediment bucket (A1-PB)
-6	Security screws (TR25 Torx and pin) (H-1039A)
-7	Trap seal primer tapping
-7MG	MI-GARD, Floor Drain Trap Seal
-8	Backwater valve (BV1250 Series) (2", 3", 4")
-10	Decorative polished top
-11	Acid resistant epoxy coated body (and clamp if needed)
-13	Galvanized body (and clamp if needed)
-15	Extension (DD-50)
-21	Secondary flat strainer (FD-9600 Series)
-28	Stainless Steel Body (Type 304) (2", 3", 4" No Hub only)
-30	PVC Socket Connection Body (2", 3" or 4")
-31	ABS Socket Connection Body (2", 3" or 4")
-34	Closure plug (C1440 Series)
-40	Underdeck clamp (A1-C3)
-41	Sump receiver (A1-BP)
-49	Chrome plated strainer assembly (add to -1 only)
-69	Stainless steel sediment bucket (A1-SSB)
-90	Threaded side outlet (2", 3") (N/A -30, -31) No Add for -NH
	4" threaded side outlet (N/A -30, -31) No Add for -NH

-95	Client logo (-3 only)
-C2	High rough-in membrane clamp (A1-C2)
-F4-(1,3)	4" NB or SS round funnel
-F4-50	4" cast iron round funnel
-F6-(1,3)	6" NB or SS round funnel
-F6-50	6" cast iron round funnel
-G-(1,3)	4" x 9" NB or SS oval funnel
-G-50	4" x 9" C.I. oval funnel
-J-(1,3)	2 1/2" W x 5 3/4" L x 1" H NB or SS oval funnel
-J-50	2 1/2" W x 5 3/4" L x 1" H cast iron oval funnel
P	Push on outlet (2", 3" or 4")
T	Threaded outlet (2", 3" or 4")
X	Inside caulk outlet (2", 3" or 4")
-Z	Extended wide elastomeric flange on top (use Z5 or ZS top)
5	5" no hub outlet
5T	5" threaded outlet
5X	5" inside caulk outlet
6	6" no hub outlet
6P	6" push on outlet*

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____