

Location: \_\_\_\_\_




**F1100-ZS**

**FLOOR DRAIN WITH SQUARE STRAINER AND CAST IRON FLANGE FOR NON-MEMBRANE FLOOR AREAS**

**Specification:** MIFAB® Series F1100-ZS lacquered cast iron floor drain with anchor flange, weepholes, and 1/8" (3) recessed, 13 1/4" (337) square cast iron flange, with standard reinforced 6" x 6" (152 x 152) square (specify strainer finish) strainer. (For membrane floors, use MIFAB F1100-C-ZS Series.)

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas. Wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate. Square adjustable strainer is used for floors that are finished of material or straight line patterns.

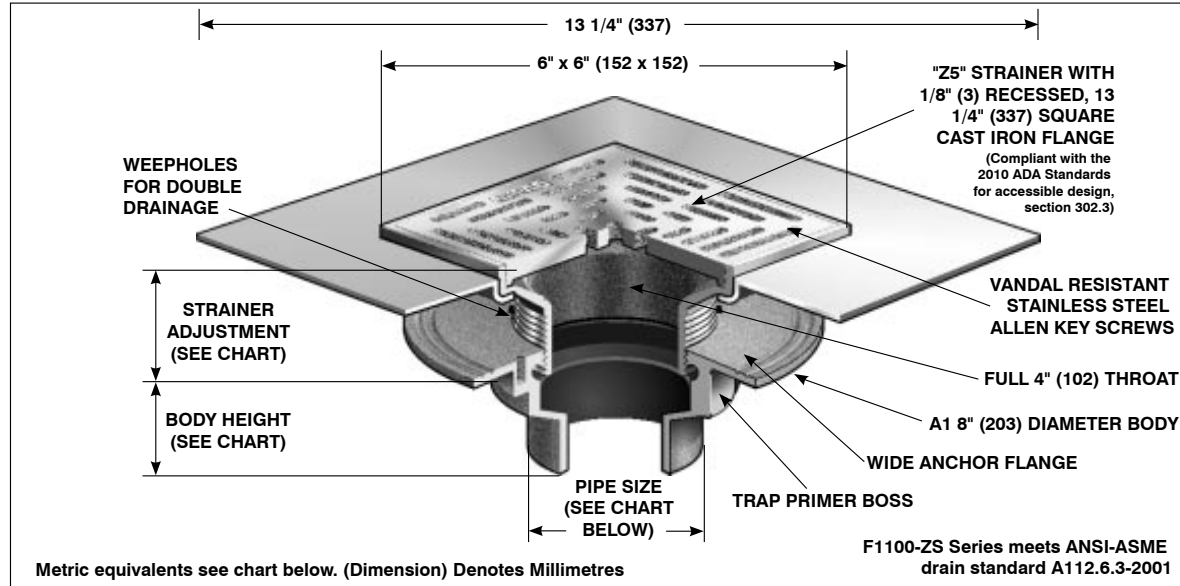

**PARTS:**



A1 BODY



ZS-(-)  
(\*) Denotes Strainer Finish (-1 or -3)

Metric equivalents see chart below. (Dimension) Denotes Millimetres

F1100-ZS Series meets ANSI-ASME drain standard A112.6.3-2001

| STRAINER<br>SIZE    | STRAINER ADJUSTMENT |              | ANSI/ASME RATING |                |                | PIPE<br>SIZE | BODY HEIGHT          |                |                 |                     |                        |
|---------------------|---------------------|--------------|------------------|----------------|----------------|--------------|----------------------|----------------|-----------------|---------------------|------------------------|
|                     | MIN                 | MAX          | FREE AREA        | LOAD RATING    |                |              | NO HUB<br>(STANDARD) | PUSH ON<br>(P) | THREADED<br>(T) | INSIDE<br>CAULK (X) | PVC/ABS<br>(-30)/(-31) |
|                     |                     |              |                  | N.B. (-1) Lbs. | S.S. (-3) Lbs. |              |                      |                |                 |                     |                        |
| 6" x 6" (152 x 152) | 7/8" (22)           | 1 9/16" (40) | 12 in² (7700²)   | Up To 2000     | 5000 to 7499   | 2" (51)      | 3" (76)              | 3 3/8" (86)    | 2 1/4" (57)     | 3 3/4" (95)         | 2 15/16" (75)          |
|                     |                     |              |                  |                |                | 3" (76)      | 3" (76)              | 3 3/8" (86)    | 2 5/8" (67)     | 3 3/4" (95)         | 3 3/4" (95)            |
|                     |                     |              |                  |                |                | 4" (102)     | 3" (76)              | 3 3/8" (86)    | 2 5/8" (67)     | 3 3/4" (95)         | 3 3/4" (95)            |
|                     |                     |              |                  |                |                | 5" (127)     | 3" (76)              | --             | 2 5/8" (67)     | 3 3/4" (95)         | --                     |
|                     |                     |              |                  |                |                | 6" (152)     | 3 1/4" (83)          | 6 1/2" (165)   | --              | --                  | --                     |

| SUFFIX | OPTIONAL VARIATIONS                                  |
|--------|--|
| -1     | Nickel bronze strainer                               |
| -3     | Stainless steel strainer                             |
| -5     | Sediment bucket                                      |
| -6     | Security screws (T-20 Torx & pin)                    |
| -7     | 1/2" trap seal primer connection                     |
| -8     | Backwater valve (2", 3", 4")                         |
| -11    | Acid resistant epoxy coated body                     |
| -13    | Galvanized body                                      |
| -15    | Extension  |
| -21    | Secondary flat stainless steel strainer (2", 3", 4") |
| -28    | Stainless steel body (Type 304)                      |
| -30    | PVC socket connection body                           |
| -31    | ABS socket connection body                           |
| -34    | Closure plug   |
| -40    | Underdeck clamp                                      |
| -41    | Sump receiver  |

|            |  |
|------------|--|
| -90        | Threaded side outlet (2", 3", 4") (cast iron only) |
| -90NH      | No hub side outlet (2", 3", 4") (cast iron only)   |
| -95        | Client logo  |
| -BA        | Buy American Act compliant product                 |
| -C         | Membrane clamp for low roughin (min. 1/2" (13))    |
| -C2        | High rough-in membrane clamp (min. 1 9/16" (40))   |
| -F4        | 4" Round funnel                                    |
| -F6        | 6" Round funnel                                    |
| (Standard) | No hub outlet                                      |
| -G         | Oval 4" x 9" funnel                                |
| -J         | 6" x 3" x 1" funnel                                |
| -MG        | MI-GARD Floor Drain Trap Sealer (2", 3" or 4")     |
| P          | Push on outlet                                     |
| -PA        | Pennsylvania Steel Act compliant product           |
| T          | Threaded outlet (2", 3", 4")                       |
| X          | Inside caulk outlet                                |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_