

Location: \_\_\_\_\_




**F1120-C**

**FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP**

**Specification:** MIFAB® Series F1120-C lacquered cast iron floor drain with anchor flange, integral deep seal trap, and standard reinforced (specify diameter), (specify material finish) strainer.

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas where side outlet body with integral deep seal trap is required. Round adjustable strainer is used for all types of poured finished floors.

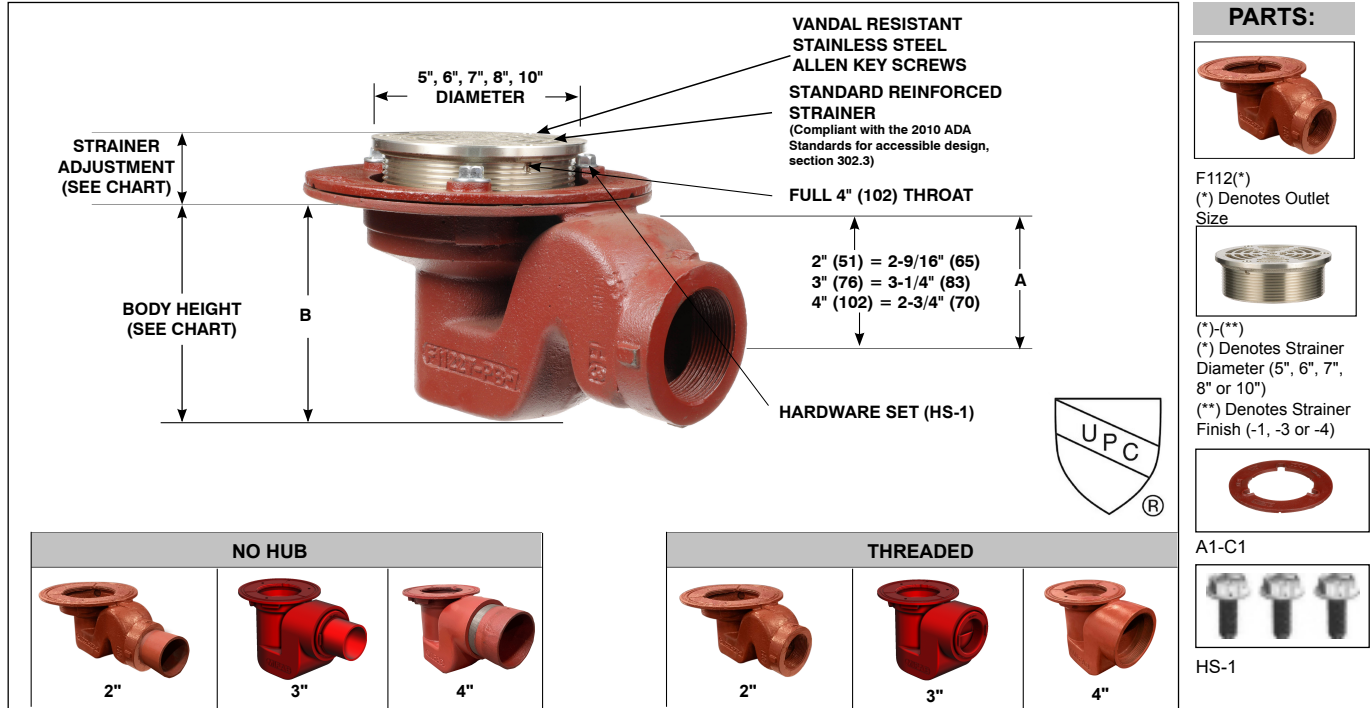

Metric equivalents see chart below. (Dimension) Denotes Millimetres									
STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT	
	MIN	MAX	FREE AREA	LOAD RATING				A	B
				N.B. (-1)	S.S. (-3)	D.I. (-4)			
5" (127)	1/2" (13)	1 1/2" (38)	8 in² (52002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	Up To 7,499 Lbs	2" (51)	2 1/4" (57)	5 3/16 (132)
6" (152)	11/16" (17)	1 1/2" (38)	9 in² (58002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	-	3" (76)	2 3/4" (70)	7 3/8" (187)
7" (178)	9/16" (14)	1 9/16" (40)	12 in² (77002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	-	4" (102)	2 3/4" (70)	7 3/8" (187)
8" (203)	11/16" (17)	2 1/4" (57)	18 in² (116002)	-	5000 To 7499 Lbs.	Up To 10,000 Lbs			
10" (254)	11/16" (17)	2 1/4" (57)	26 in² (171702)	-	5000 To 7499 Lbs.	-			

**SUFFIX OPTIONAL VARIATIONS**

- 1 Nickel bronze strainer
- 3 Stainless steel strainer
- 4 Ductile iron grate (5" x 8" only)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 16 Square top
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 34 Closure plug
- 49 Chrome Plated Strainer
- 50 Lacquered cast iron funnel
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)

**SUFFIX OPTIONAL VARIATIONS**

- 95 Client logo
- BA Minimum 51% material cost made in the USA
- C Membrane clamp for low roughin (min. 1/2" (13))
- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- (Standard) No hub outlet
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 6" x 3" x 1" funnel
- MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- NH No hub side outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- Z Extended wide elastomeric flange

Job Name: _____	Page No: _____
Section No: _____	Contractor: _____
Schedule No: _____	Purchase Order No: _____