

Location: _____




F1120T-C

FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP

Specification: MIFAB® Series F1120T-C lacquered cast iron floor drain with anchor flange, integral deep seal trap, and standard reinforced (specify diameter), (specify material finish) strainer.

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas where side outlet body with integral deep seal trap is required. Round adjustable strainer is used for all types of poured finished floors.

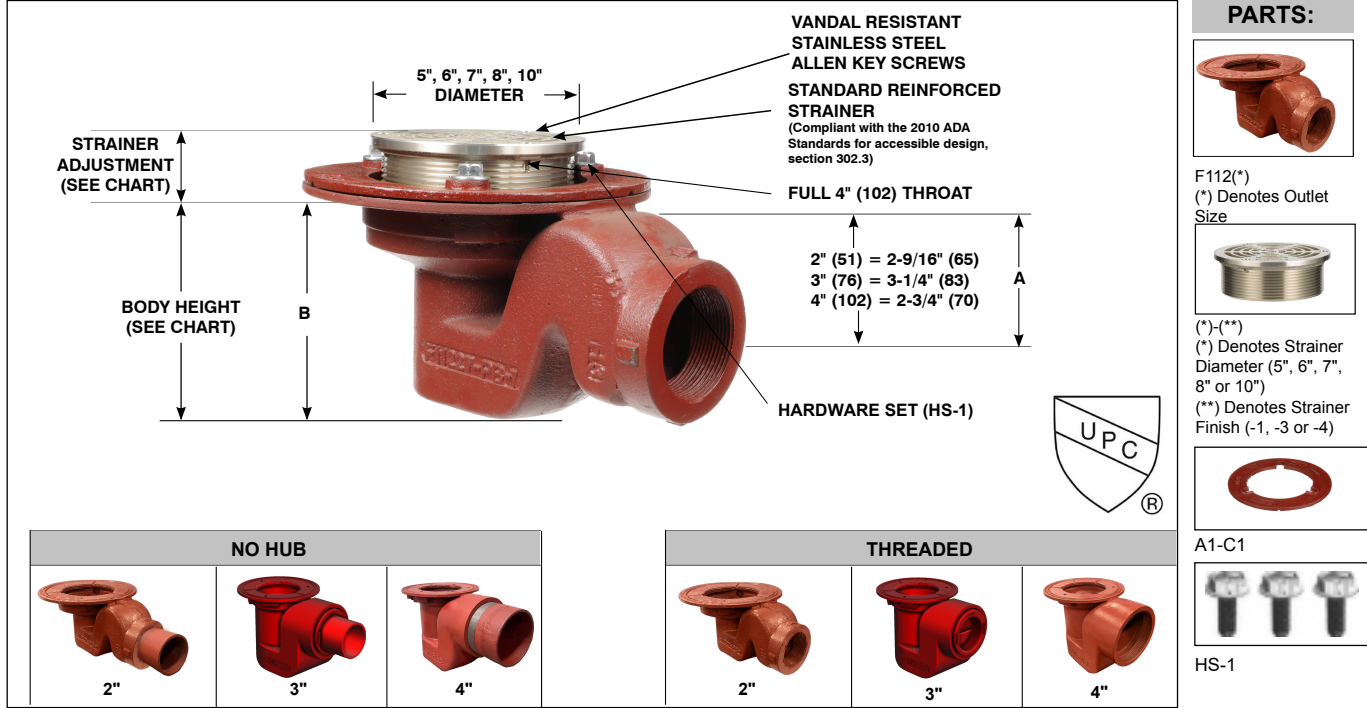

PARTS:

F112(*)
(*) Denotes Outlet Size

A1-C1

HS-1

(*) Denotes Strainer Diameter (5", 6", 7", 8" or 10")
(**) Denotes Strainer Finish (-1, -3 or -4)

Metric equivalents see chart below. (Dimension) Denotes Millimetres

STRAINER DIAMETER	STRAINER ADJUSTMENT		FREE AREA	ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT	
	MIN	MAX		LOAD RATING				A	B
				N.B. (-1)	S.S. (-3)	D.I. (-4)			
5" (127)	1/2" (13)	1 1/2" (38)	8 in ² (52002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	Up To 7,499 Lbs	2" (51)	2 1/4" (57)	5 3/16" (132)
6" (152)	11/16" (17)	1 1/2" (38)	9 in ² (58002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	-	3" (76)	2 3/4" (70)	7 3/8" (187)
7" (178)	9/16" (14)	1 9/16" (40)	12 in ² (77002)	Up To 2000 Lbs.	5000 To 7499 Lbs.	-	4" (102)	2 3/4" (70)	7 3/8" (187)
8" (203)	11/16" (17)	2 1/4" (57)	18 in ² (116002)	-	5000 To 7499 Lbs.	Up To 10,000 Lbs			
10" (254)	11/16" (17)	2 1/4" (57)	26 in ² (171702)	-	5000 To 7499 Lbs.	-			

- SUFFIX OPTIONAL VARIATIONS**
- 1 Nickel bronze strainer
 - 3 Stainless steel strainer
 - 4 Ductile iron grate (5" x 8" only)
 - 5 Sediment bucket
 - 6 Security screws (T-20 Torx & pin)
 - 7 1/2" trap seal primer connection
 - 8 Backwater valve (2", 3", 4")
 - 11 Acid resistant epoxy coated body
 - 13 Galvanized body
 - 15 Extension
 - 16 Square top
 - 21 Secondary flat stainless steel strainer (2", 3", 4")
 - 34 Closure plug
 - 49 Chrome Plated Strainer
 - 50 Lacquered cast iron funnel
 - 90 Threaded side outlet (2", 3", 4") (cast iron only)
 - 90NH No hub side outlet (2", 3", 4") (cast iron only)

- SUFFIX OPTIONAL VARIATIONS**
- 95 Client logo
 - BA Minimum 51% material cost made in the USA
 - C Membrane clamp for low roughin (min. 1/2" (13))
 - C2 High rough-in membrane clamp (min. 1 9/16" (40))
 - F4 4" Round funnel
 - F6 6" Round funnel
 - (Standard) No hub outlet
 - G Oval 4" x 9" funnel
 - HP Heel proof grate (1/4" maximum grate opening size, -3 only)
 - J 6" x 3" x 1" funnel
 - MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
 - NH No hub side outlet
 - PA Pennsylvania Steel Act compliant product
 - T Threaded outlet (2", 3", 4")
 - Z Extended wide elastomeric flange

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____