


F1130C

FLOOR DRAIN WITH INTEGRAL DEEP SEAL TRAP AND CLEANOUT

Specification: MIFAB® Series F1130C lacquered cast iron floor drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, seepage collection sump, integral deep seal trap, and standard reinforced (specify diameter), (specify material finish) strainer, and standard reinforced 5" (127) diameter (specify material finish) top assembly floor cleanout with access cover, "O" ring Test Seal and plug with primary gasket seal.

Function: Used in kitchens, supermarkets and other membrane finished areas where side outlet body connection with integral deep seal trap and cleanout access is required. Round adjustable strainer and round floor cleanout top is used for all types of poured finished floors.

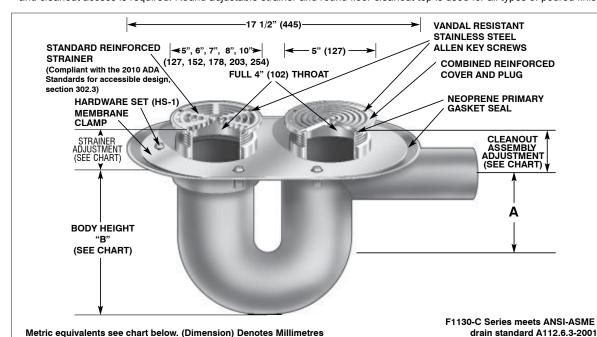



F113(*)C (*) Denotes Outlet Size (2", 3" or 4")



(*)-(**) (*) Denotes Strainer Diameter (5", 6", 7", 8", or 10") (**) Denotes Strainer Finish (-1, -3 or -4)



| STRAINER | STRAINER ADJUSTMENT | | ANSI/ASME RATING | | | | CLEANOUT | CLEANOUT ASSEMBLY ADJUSTMENT | | LOAD RATING | | PIPE | BODY HEIGHT | |
|-----------|------------------------|-------------|--|----------------|----------------|----------------|------------------|------------------------------|-------------|-------------|-----------|----------|--------------|-------------|
| SIZE | MIN | MAX | FREE AREA | LOAD RATING | | | ASSEMBLY SIZE | | | N.B. (-1) | S.S. (-3) | SIZE | Α | В |
| | | | | N.B. (-1) Lbs. | S.S. (-3) Lbs. | D.I. (-4) Lbs. | | MIN | MAX | LBS. | LBS. | | , , | |
| 5" (127) | 1 5/8" (41) | 2 5/8" (67) | 8 in² (5200²) | Up To 2000 | 5000 to 7499 | UP TO 7499 | 5" (127) | 1 5/8" (41) | 2 5/8" (67) | UP TO 4,999 | 5000-7499 | 2" (51) | 5 3/8" (137) | 13 ½" (343) |
| 6" (152) | 1 5/8" (41) | 2 5/8" (67) | 9 in² (5800²) | Up To 2000 | 5000 to 7499 | - | | | | D.I. (-4) | | 3" (76) | 6" (152) | 13 ½" (343) |
| 7" (178) | 1 5/8" (41) | 2 5/8" (67) | 12 in² (7700²) | UP TO 2,000 | 5000-7499 | - | | | | UP TO 7,499 | | 4" (102) | 6 1/4" (159) | 13 ½" (343) |
| 8" (203) | 1 7/8" (48) | 2 5/8" (67) | 18 in² (11600²) | Up To 2000 | 5000 to 7499 | UP TO 10000 | | | | | | | | |
| 10" (254) | 1 1/16" (17) | 2 1/4" (57) | 26 in ² (17170 ²) | - | 5000 to 7499 | - | | | | | | | | |

| SUFFIX | OPTIONAL VARIATIONS |
|--------|-----------------------------------|
| -1 | Nickel bronze strainer |
| -3 | Stainless steel strainer |
| -4 | Ductile iron grate (5" x 8" only) |
| -5 | Sediment bucket |
| -6 | Security screws (T-20 Torx & pin) |
| -7 | 1/2" trap seal primer connection |
| -8 | Backwater valve (2", 3", 4") |
| -11 | Acid resistant epoxy coated body |
| -13 | Galvanized body |
| -15 | Extension |
| -16 | Square top |
| -34 | Closure plug |

| -49 | Chrome Plated Strainer | | |
|-----|---|--|--|
| -50 | Lacquered cast iron funnel | | |
| -95 | Client logo | | |
| -BA | Minimum 51% material cost made in the USA | | |
| -F4 | 4" Round funnel | | |
| -F6 | 6" Round funnel | | |
| -G | Oval 4" x 9" funnel | | |
| -HP | Heel proof grate (1/4" maximum grate opening size, -3 only) | | |
| -J | 6" x 3" x 1" funnel | | |
| -MG | MI-GARD Floor Drain Trap Sealer (2", 3" or 4") | | |
| -PA | Pennsylvania Steel Act compliant product | | |
| -Z | Extended wide elastomeric flange | | |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

| Job Name: | Page No: |
|--------------|--------------------|
| Section No: | Contractor: |
| Schedule No: | Purchase Order No: |

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880