

Location: _____




F1760-FL

7" X 15" HEAVY DUTY GUTTER DRAIN WITH ANCHOR FLANGE

Specification: MIFAB® Series F1760-FL lacquered cast iron heavy duty gutter drain with ductile iron grate and anchor flange.

Function: Used in membrane floor and trench areas that have width limitations for surface drainage. Long rectangular grate has large free area to drain surface water quickly.

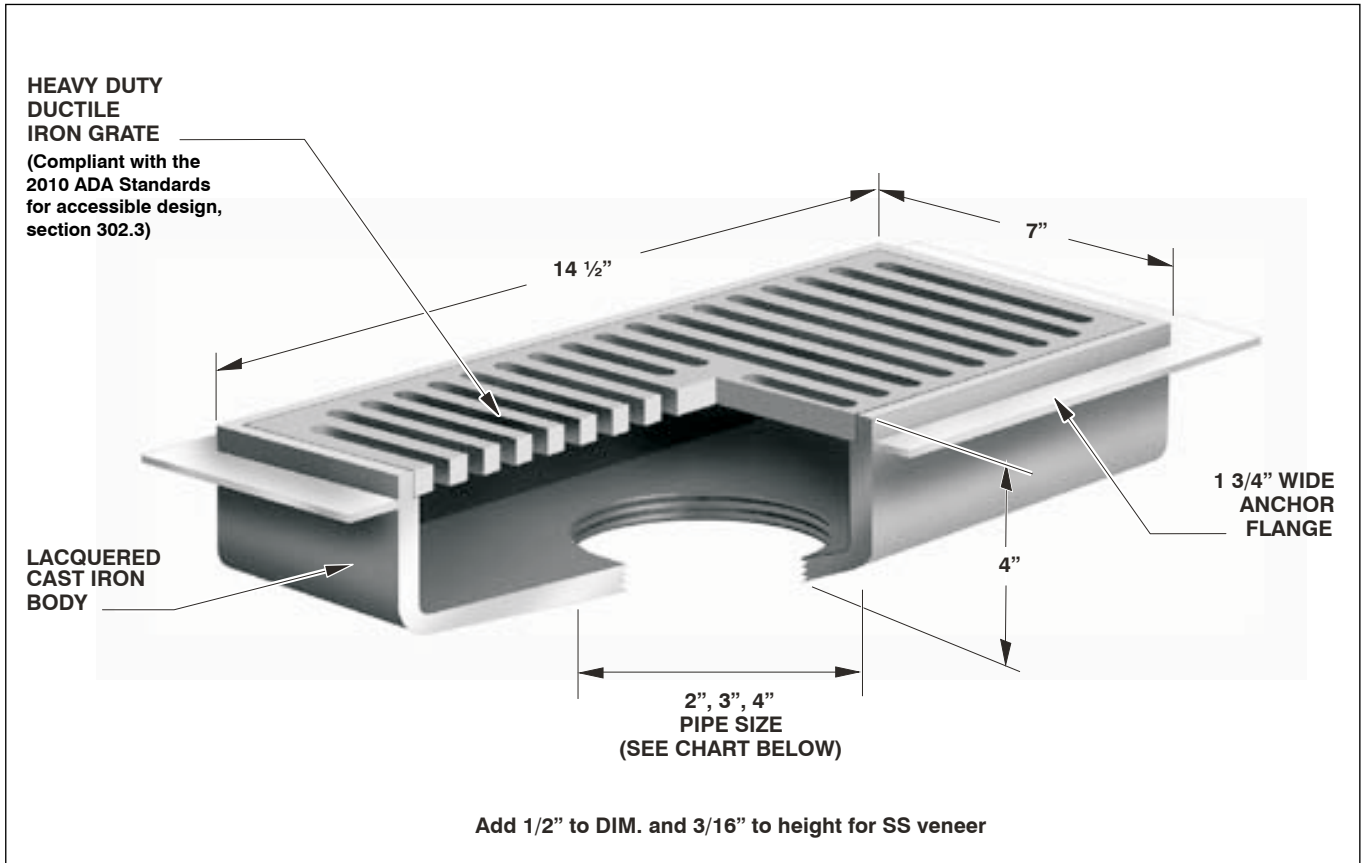

Note: 4" F.I.P. connection is standard. MIFAB's MI-850 Series of no hub adaptors can be assembled into the 4" F.I.P. connection.

STRAINER SIZE	ANSI / ASME RATING		BODY HEIGHT				
	FREE AREA	LOAD RATING S.S. (-3) D.I. (-4)	PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)
7" x 14 1/2" (178 x 368)	39 in ²	OVER 10,000 LBS	2" (51)	4"(102)	4 5/8"(118)	3 1/2"(89)	5"(127)
			3" (76)	4"(102)	4 5/8"(118)	3 7/8"(98)	5"(127)
			4" (102)	4"(102)	4 5/8"(118)	3 7/8"(98)	5"(127)

SUFFIX	OPTIONAL VARIATIONS
-3	Stainless steel frame and grate
-6	Security screws (T-20 Torx & pin)
-8	Backwater valve (2",3",4")
-11	Acid resistant epoxy coated body
-13	Galvanized body
-22	Less plange
-BA	Minimum 51% material cost made in the USA
-C	Membrane Clamp

SUFFIX	OPTIONAL VARIATIONS
-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-NH	No hub outlet
P	Push on outlet
-PA	Pennsylvania Steel Act compliant product
T	Threaded outlet (2", 3", 4")
X	Inside caulk outlet

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____