

Location: _____




F220-TS(*)-1

TOP SET® ROUND DOUBLE ADJUSTABLE FLOOR DRAIN WITH COVER

Specification: MIFAB® Series F220-TS(*)-1 (*specify strainer diameter) MIFAB Top Set® finished floor drain with lacquered cast iron, non flanged body, securing and adjustable hardware, allen key vandal resistant stainless steel screws and nickel bronze heelproof strainer (5" contains PVC shank) that can be adjusted vertically and side to side after the concrete pour with 1/2" thick composite strainer protective cover and indicating whisker.

Function: Used in showers, kitchens, restrooms, and other non-membrane finished areas. Round adjustable nickel bronze strainer is used for all types of poured finished floors. The concrete is poured to the same level as the orange cap. After the pour, the cap is removed with channel locks and three Phillips head screws underneath the grate can be engaged to raise the strainer vertically and also adjust it side to side.

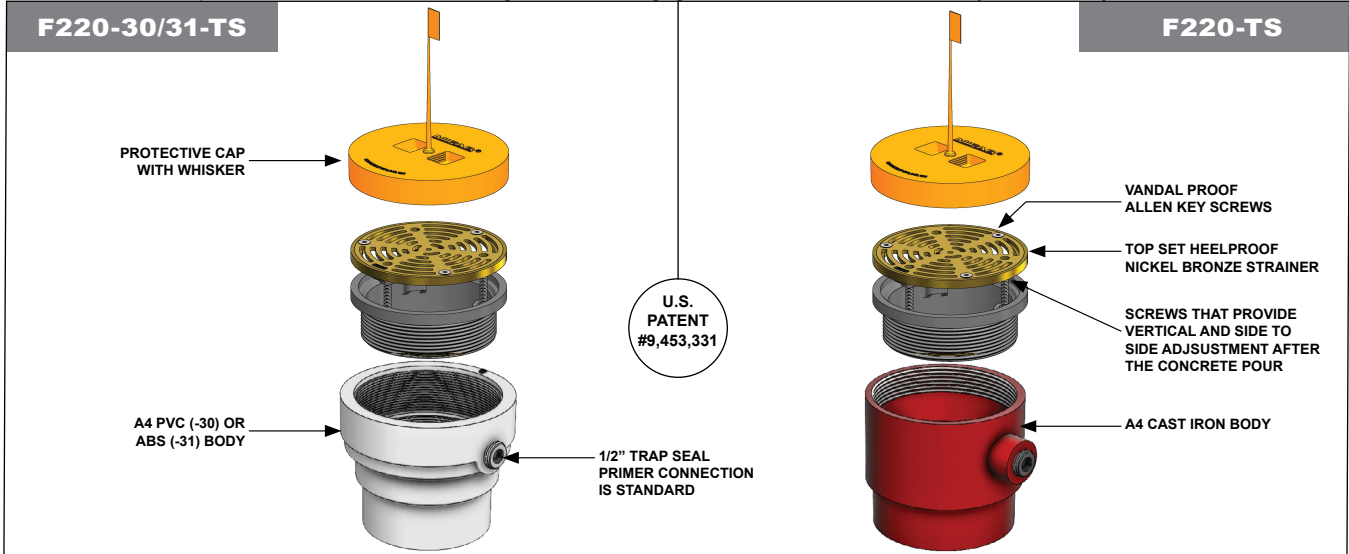

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	PVC/ABS (-30)/ (-31)
	MIN	MAX	FREE AREA	LOAD RATING N.B. (-1)				
5" (127)	1/2" (13)	1 1/2" (38)	8 in ² (5200 ²)	Up to 2,000 Lbs.	2" (51)	3" (76)	3 3/8" (86)	2 15/16" (75)
6" (152)	11/16" (17)	1 1/2" (38)	9 in ² (5800 ²)	Up to 2,000 Lbs.	3" (76)	3" (76)	3 3/8" (86)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	3 3/4" (95)

MODEL #	OUTLET SIZE	STRAINER DIAMETER and MATERIAL
F222-30-TS5-1	2" PVC socket	5" Round, Nickel Bronze
F223-30-TS5-1	3" PVC socket	5" Round, Nickel Bronze
F224-30-TS5-1	4" PVC socket	5" Round, Nickel Bronze
F222-30-TS6-1	2" PVC socket	6" Round, Nickel Bronze
F223-30-TS6-1	3" PVC socket	6" Round, Nickel Bronze
F224-30-TS6-1	4" PVC socket	6" Round, Nickel Bronze
F222-31-TS5-1	2" ABS socket	5" Round, Nickel Bronze
F223-31-TS5-1	3" ABS socket	5" Round, Nickel Bronze
F224-31-TS5-1	4" ABS socket	5" Round, Nickel Bronze
F222-31-TS6-1	2" ABS socket	6" Round, Nickel Bronze
F223-31-TS6-1	3" ABS socket	6" Round, Nickel Bronze
F224-31-TS6-1	4" ABS socket	6" Round, Nickel Bronze
F222-TS5-1	2" No Hub (Cast Iron)	5" Round, Nickel Bronze
F223-TS5-1	3" No Hub (Cast Iron)	5" Round, Nickel Bronze
F224-TS5-1	4" No Hub (Cast Iron)	5" Round, Nickel Bronze

MODEL #	OUTLET SIZE	STRAINER DIAMETER and MATERIAL
F222-TS6-1	2" No Hub (Cast Iron)	6" Round, Nickel Bronze
F223-TS6-1	3" No Hub (Cast Iron)	6" Round, Nickel Bronze
F224-TS6-1	4" No Hub (Cast Iron)	6" Round, Nickel Bronze
F222P-TS5-1	2" Push On (Cast Iron)	5" Round, Nickel Bronze
F223P-TS5-1	3" Push On (Cast Iron)	5" Round, Nickel Bronze
F224P-TS5-1	4" Push On (Cast Iron)	5" Round, Nickel Bronze
F222P-TS6-1	2" Push On (Cast Iron)	6" Round, Nickel Bronze
F223P-TS6-1	3" Push On (Cast Iron)	6" Round, Nickel Bronze
F224P-TS6-1	4" Push On (Cast Iron)	6" Round, Nickel Bronze

SUFFIX	OPTIONAL VARIATIONS
-5	Sediment bucket
-6	Security Screws (T-20 Torx and pin)
-7MG	MI-GARD-TS
-15	2" Cast Extension Iron Extension Adapter
-30	PVC socket connection body
-31	ABS socket connection body
-P	Push on outlet body connection

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____