

Location: \_\_\_\_\_



# HBVB

## HOSE CONNECTION VACUUM BREAKER -LL

**Specification:** Designed for installation on potable water lines such as service sinks, laundry tubs and hose bibbs to protect against back-siphonage of polluted water into the potable water supply. Assembly shall provide protection where a potential health hazard does not exist.

**Function:** A Hose Connection Vacuum Breaker is designed to prevent the back-siphonage of contaminated water. This device is designed to meet ASSE 1011 and CSA B 64.2 and is IAPMO listed. This device is not to be used under continuous pressure or where there is a possibility of a back pressure condition.

**Features:** Furnished with a break away set screw to provide a tamper resistant installation. Allows sill cock to be easily drained. Manufactured in both a rough brass and a chrome plated option.

**Ratings:**


- Maximum Pressure: 125 psi (8.6 bar).
- Maximum Temperature: 180° F (82° C).
- Inlet Connection: 3/4" (20 MM) standard female hose thread.
- Outlet Connection: 3/4" (20 MM) standard male hose thread.

**LEAD FREE**

The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.




*In both Rough Brass and Chrome Plated models.*

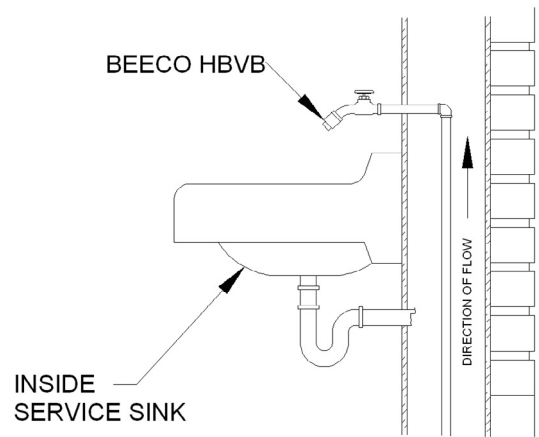

Model No.	Size	Finish
HVB.75F-X-.75M-RB-LL	3/4"	Rough Brass
HVB.75F-X-.75M-CP-LL	3/4"	Chrome Plated

**Approvals**

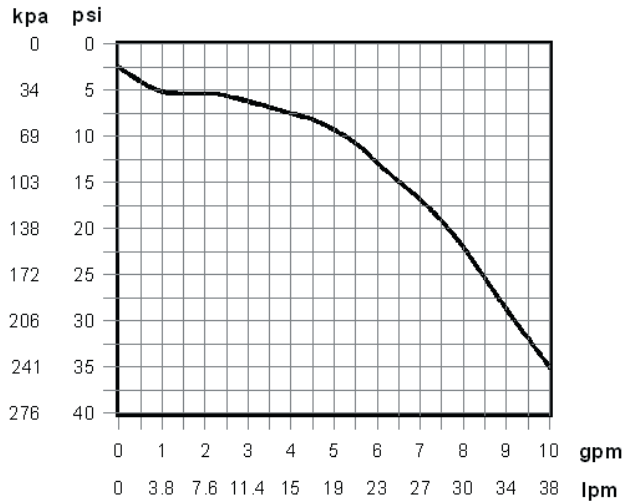

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_