

Location: _____




HY-5000-NPB

**NARROW WALL MODERATE
CLIMATE WALL HYDRANT**


Specification: MIFAB® Series HY-5000-NPB self draining, lead free, moderate climate narrow wall hydrant with A.S.S.E. 1019 & 1052 certified antisiphon vandal resistant double vacuum breaker. Operating key furnished with each hydrant.

Function: The HY-5000-NPB Series hydrants feature a combination 3/4" SWT. and 3/4" M.I.P. inlet connection that swivels 360° to any position for easy connection to the water supply. The overall depth of the HY-5000-NPB is 2 5/8".

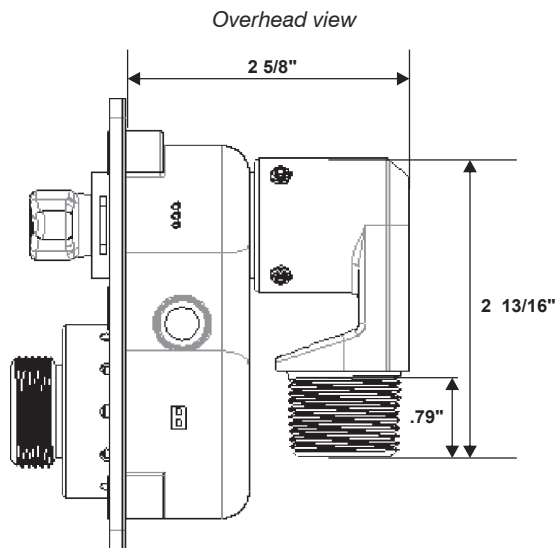

HY-5000-NPB SERIES FEATURES:

- **INTERNAL COMPONENTS** - Quarter-turn ceramic cartridge assembly.
- **VACUUM BREAKER** - unique self draining vandal resistant integral double vacuum breaker protects from anti-siphon conditions.
- **FACE PLATE** - polished stainless steel.
- **WATER SUPPLY CONNECTION** - swivel 360° to any position.
- **APPROVALS** - HY-5000-NPB wall hydrant is listed with A.P.M.O. and manufactured with an anti-siphon vacuum breaker that is tested and certified to the A.S.S.E. Standard 1019 & 1052.

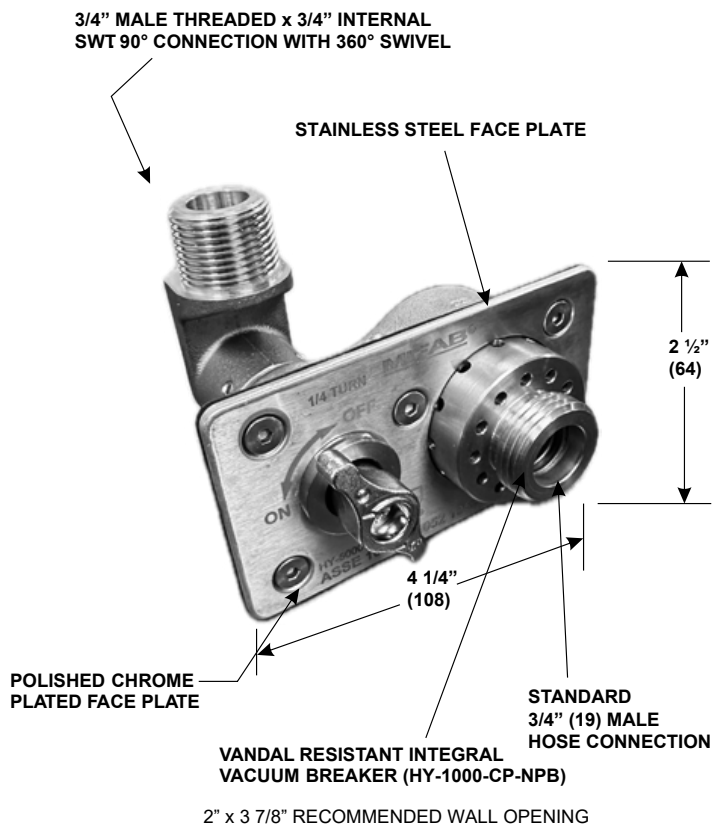

2" x 3 7/8" RECOMMENDED WALL OPENING



The wetted surface contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

The wetted surface contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

MODEL NO.	OVER LENGTH		APPROXIMATE WEIGHT		SWIVEL INLET CONNECTION
	IN	MM	Lbs.	Kgs.	IN
HY-5000-NPB	2 5/8	68	1	0.5	3/4" SWT, 3/4" M.I.P.

SUFFIX OPTIONAL VARIATIONS

- BA Minimum 51% material cost made in the USA
- PA Pennsylvania Steel Act compliant product
- 0 1" (25) Hose connection
- RK Repair kit

(Dimensions) Donates Millimeters

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____