

Location: _____




LIL-N

**Lil Max® – 5 to 44 Gallon
Acid Neutralization Interceptors**

Specification: MIFAB® Series Lil-(specify size)-N HDPE injection molded acid neutralization interceptor with flow rating of ____ (indicate) and liquid holding capacity of ____ (indicate). Unit shall include: internal deep seal inlet diffuser and HDPE injection molded, non skid, rectangular gasketed lid with securing latches.

Function: Used in laboratories, industrial processes, chemical treatment plants, municipal water treatment facilities and/or other polluting sources to dilute and neutralize harmful wastes that may be discharged. Limestone chips (provided by others) are required to be placed inside of the acid neutralization tank to neutralize the acidic water.

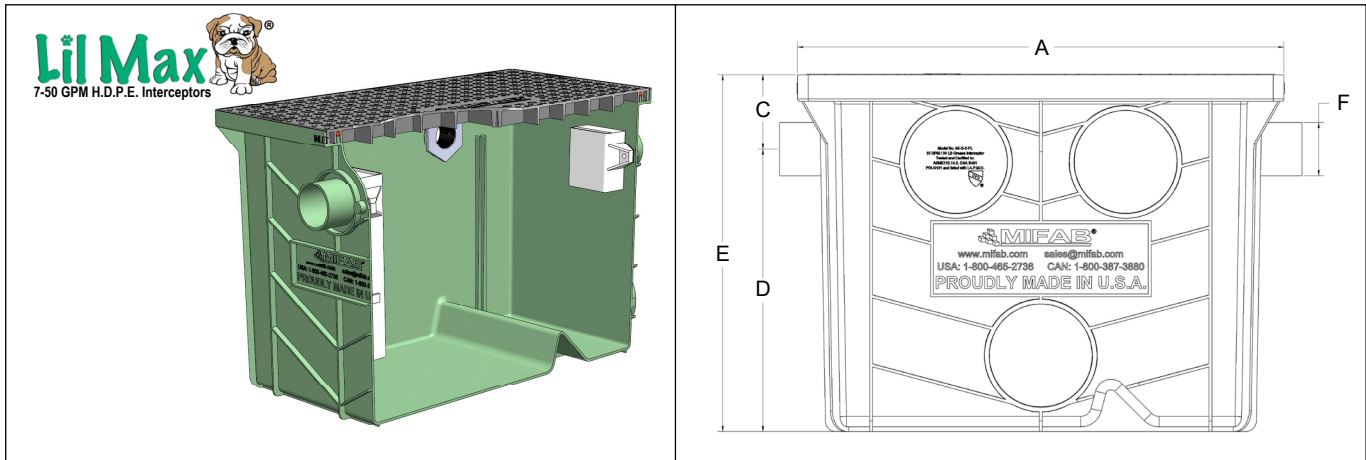

MODEL NO.	FLOW RATE (GPM)	LIQUID CAP. (Gallons/Cu. Ft.)	A (IN)	B (IN) WIDTH	C (IN)	D (IN)	E (IN)	F (IN)	Shipping Weight (lbs.) (in box)	Tank Dimensions (L x W x H)
Lil-7-N	55	5.8 / .75	19.5	15.5	3.5	9	12.5	2	21	22" x 16" x 13"
Lil-10-N	55	9.2 / 1.2	23	17.5	3.5	9.75	13.25	2	30	25" x 18" x 14"
Lil-15-N	55	13 / 1.7	23	17.5	3.5	13.25	16.75	2	33	25" x 18" x 17.5"
Lil-20-N	140	16 / 2.1	29.5	20.5	3.5	10.75	14.25	3	41	32" x 21" x 15"
Lil-25-N	140	23 / 3.1	29.5	20.5	3.5	14.75	18.25	3	44	32" x 21" x 19"
Lil-35-N	140	39 / 5.2	33	25.5	5.5	16.75	22.25	3	57	35" x 26" x 23"
Lil-50-N	140	44 / 5.9	33	25.5	5.5	18.75	24.25	3	71	35" x 26" x 25"

SUFFIX	OPTIONAL VARIATIONS	PART NO.
-C	Extension "C" as required (up to 9" increments) (for models Lil-20-N and Lil-25-N)	Lil-25-EXT
-C	Extension "C" as required (up to 9" increments) (for models Lil-35-N and Lil-50-N)	Lil-50-EXT
-F	Connection sizes different from standard (specify size) (by using a MIFAB increasing / reducing coupling)	Contact MIFAB
-FSCR	Stainless steel fine screen sediment bucket for Lil-20-N	MI-G-4-PL-PSB-FSCR
-FSCR	Stainless steel fine screen sediment bucket for Lil-25-N	MI-G-5-PL-PSB-FSCR
-FSCR	Stainless steel fine screen sediment bucket for Lil-35-N	MI-G-6-PL-PSB-FSCR
-FSCR	Stainless steel fine screen sediment bucket for Lil-50-N	MI-G-7-PL-PSB-FSCR
-F4B	4" No hub bulkhead connection for inlet/outlet (Only for LIL-35-N & LIL-50-N)	MI-G-5-PL-PSB-FSCR
-LSC	Limestone chips (50 lb. bag)	MI-LSC
-V	2" No hub vent connection (Specify size and location)	MI-G-7-PL-PSB-FSCR
-HD	Heavy duty 10 gauge steel lid (up to 2,000 lbs. load bearing) (See page 30 for image)	Contact MIFAB
-LHSI	No hub inlet on left hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-LHSO	No hub outlet on left hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-RHSI	No hub inlet on right hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-RHSO	No hub outlet on right hand side (not available with sediment bucket) (for Lil Max, Big Max, SuperMax)	MI-G-PL-PF4
-SP-IN	External sampling port - inline	Lil-SP
-SAMPORT	External sampling port - offset	Lil-SP-OF
-T	Female threaded connections (for Lil Max, Big Max, SuperMax - 2 pcs. Included)	MI-G-PL-PF4T

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____