
Location: _____

MIFAB® MC-10-UN

HORIZONTAL ADJUSTABLE NARROW WALL WATER CLOSET CARRIER

Specification: MIFAB® Series MC-10-UN (Specify -L for left or -R for right design) single, horizontal, adjustable, narrow wall water closet carrier with lacquered cast iron fitting, 4” (102) no hub waste, 2” (51) no hub vent connection, lacquered cast iron gasketed one piece faceplate and leg assembly, adjustable 8” tapered thread ABS nipple with integral test cap, neoprene bowl gasket, hardware, threaded rod protectors and polished chrome plated finishing cap nuts.


Function: Used with off the floor plumbing fixtures that are wall mounted and have no contact with the finished floor. The closet carrier is completely concealed within the wall and supports the load of the fixture through a faceplate and foot support system that is anchored to the floor. Sanitation underneath the fixture is more efficiently and economically maintained when installed off of the floor compared to floor mounted.

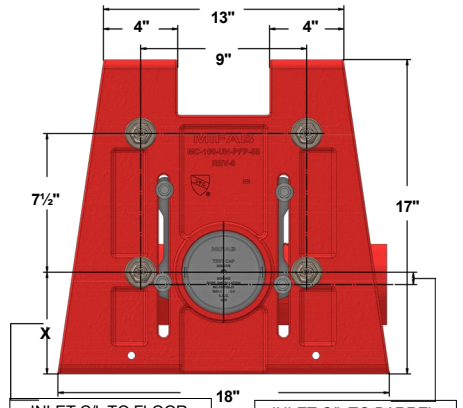

INLET C/L TO FLOOR ADJ. RANGE	
PART NUMBER	**"X"**
MC-10-UN	5.5"
MC-10-ADA	7.5"


INLET C/L TO BARREL C/L ADJ. RANGE	
MIN	**MAX**
1/4"	4"

BREAKAWAY TABS
CENTERLINE OF NIPPLE TO FLOOR




***MC-10-UN IS TESTED TO SUPPORT A 500 LB. LOAD WITHOUT THE REAR ANCHOR SUPPORT.**

MC-10R-UN

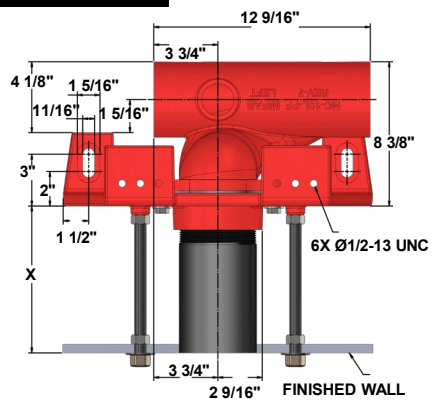



MC-10D-UN

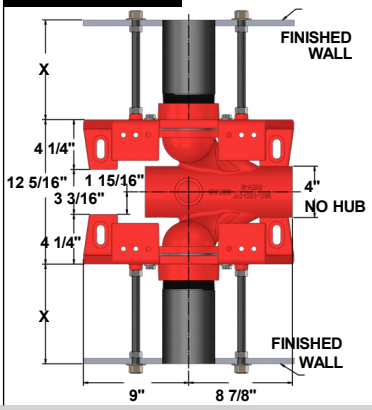

"X" = MINUMUM OF 1 1/4" WITH ROLLING THREAD SHORTENED NIPPLE. UP TO 6 1/4" WITH STANDARD NIPPLE

2" NO-HUB VENT CONNECTION

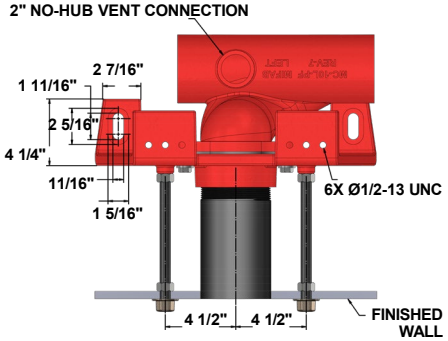



MC-10-UN SERIES MEETS ANSI/ASME FIXTURE CARRIER STANDARD A112.6.1M-97

	SUFFIX	OPTIONAL VARIATIONS
☐	**-ADA**	7 1/2” from floor to center of nipple for ADA rough in
☐	**-AH8**	8” ABS nipple with adjustable horn
☐	**-AH12**	12” ABS nipple with adjustable horn
☐	**-ASY**	Prefabricated carriers
☐	**-BA**	Minimum 51% material cost made in the USA
☐	**-CI-4**	4” rolling thread cast iron nipple
☐	**-CI-6**	6” rolling thread cast iron nipple
☐	**-CI-8**	8” rolling thread cast iron nipple
☐	**-CI-12***	12” rolling thread cast iron nipple
☐	**-CI-24**	24” rolling thread cast iron nipple
☐	**-CO**	With Cleanout Assembly (MC-10-CO)
☐	**-FM**	Floor mount back outlet fixture support
☐	**-HD-750**	750 lb. rated heavy duty
☐	**-HDX**	1,000 Lb. rated extra heavy duty
☐	**-HS**	Hub and spigot connection

☐	**-L**	Left hand fitting
☐	**-LR**	Low Rough In
☐	**-OR8**	8" rolling thread ABS nipple (MC-10-PN8R-31)
☐	**-OR12***	12" rolling thread ABS nipple (MC-10-PN12R-31)
☐	**-PA**	Pennsylvania Steel Act compliant product
☐	**-R**	Right hand fitting
☐	**-01**	Neoprene bowl gasket
☐	**-1**	Finishing / Tiling frame
☐	**-10**	Auxiliary support, recommended with nipple lengths over 12”
☐	**-12**	12” tapered thread ABS nipple
☐	**-13**	All galvanized
☐	**-14**	Vandal proof finish trim
☐	**-17**	Test plug for custom cast iron nipples
☐	**-19**	Nipple wrench
☐	**-20**	Flush valve support
☐	**-22**	Less fitting

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB *reserves the right to make changes in material and design without formal notice and obligation.*

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880