

Location: \_\_\_\_\_




**MH-300, 400, 600**

## SIPHONIC ROOF DRAIN

**Specification:** MIFAB® / Hydromax Series MH-300, 400, 600 (specify outlet connection size) lacquered cast iron siphonic roof drain with wide anchor flange, cast iron waterproofing membrane clamp ring, ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware.

**Function:** Used in any type of roofs as a siphonic roof drain system.

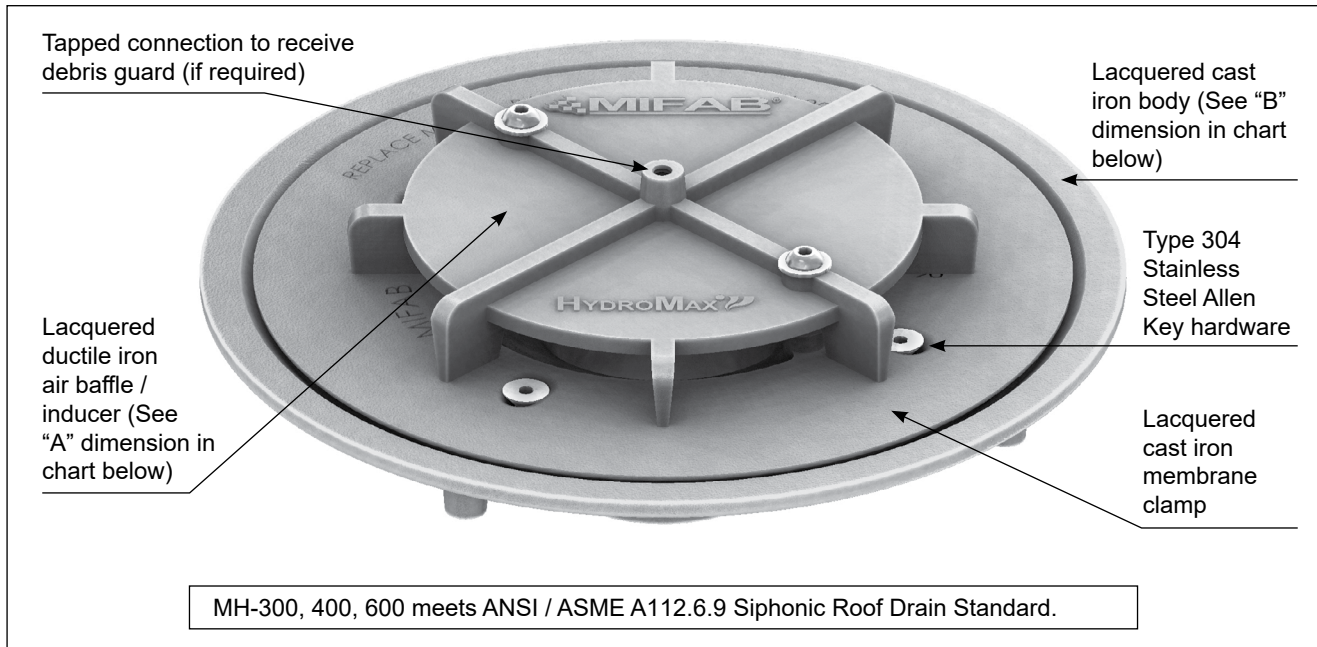

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION				
			Resistance Value (K)	Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-300	3" (76)	3" 1/8" (79)	0.12	23.00	350.00	8.86" (225.11)	13" (330)
MH-400	4" (102)	3" 1/2" (90)	0.08	75.00	750.00	12.19" (309.73)	19 3/8" (492)
MH-600	6" (152)	4" 3/4" (120)	0.04	160.00	1,800.00	17.87" (454)	25 1/4" (640)

**SUFFIX      OPTIONAL VARIATIONS:**

- 11 Acid resistant epoxy coated body
- 12A Galvanized body and membrane clamp
- 13 Galvanized body, membrane clamp and dome
- BP Sump receiver
- BA Minimum 51% material cost made in the USA

**SUFFIX      OPTIONAL VARIATIONS:**

- G Stainless steel ballast guard
- M Debris Guard
- PA Pennsylvania Steel Act compliant product
- UDC Underdeck clamp

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
Section No: \_\_\_\_\_ Contract: \_\_\_\_\_  
Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880