

Location: _____




MH-305-G-OF

**SIPHONIC ROOF DRAIN WITH
WIDE ANCHOR FLANGE**

Specification: MIFAB® / Hydromax Series MH-305-G-OF siphonic roof drain with wide anchor flange, Stainless Steel air baffle / inducer with Type 304 stainless steel allen key hardware. Spacer starts at 2" default but can be made taller by 1" increments."

Function: Used in Gutter siphonic roof drain system.

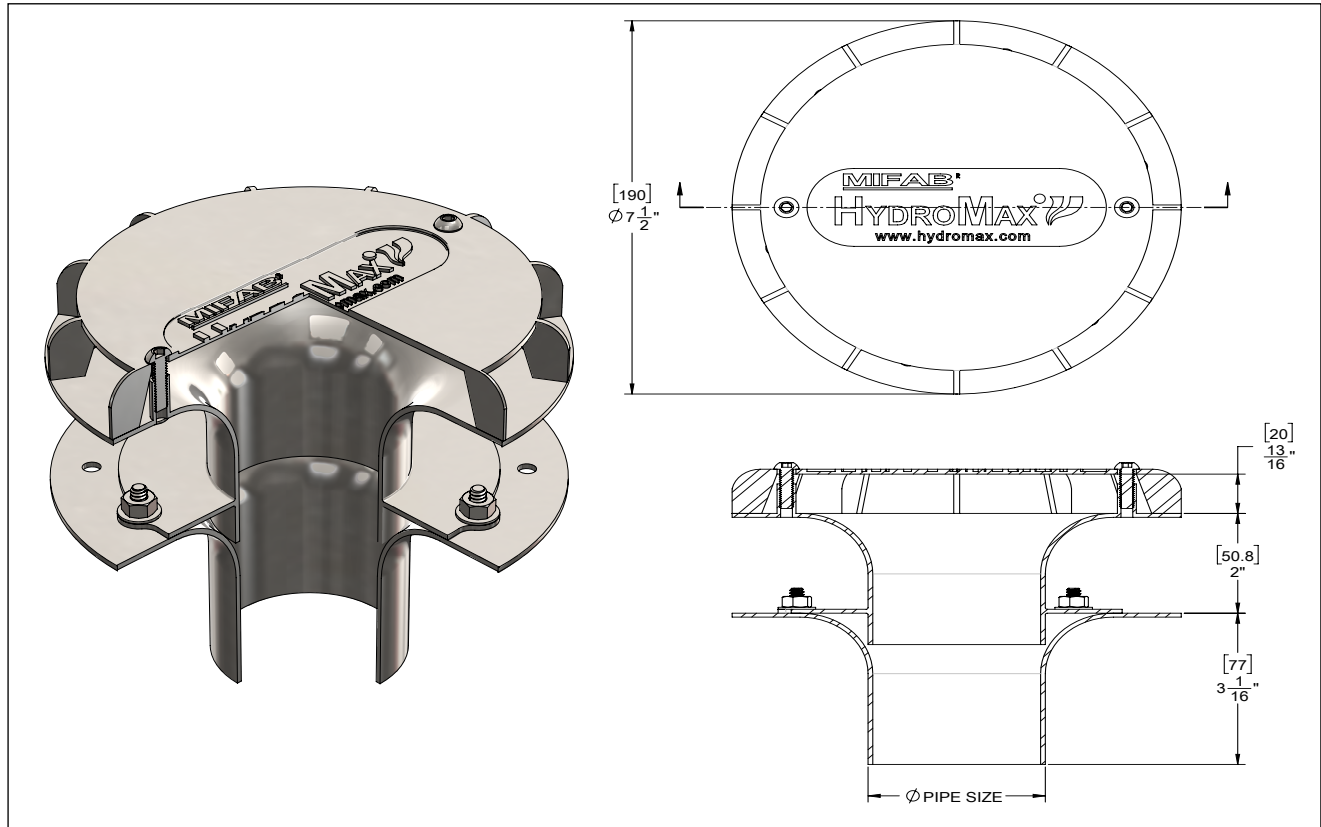

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION			
			Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-305-G-OF	3" (76)	3" (75)	23	304	7 1/2" (190)	7 1/2" (190)

SUFFIX	OPTIONAL VARIATIONS:
-BA	Sump receiver (A8-BP)
-G	Stainless steel ballast guard
-M	Debris Guard
-PA	Pennsylvania Steel Act compliant product
-DW3	3" Water Dam

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contract: _____
Schedule No: _____ Purchase Order No: _____

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

2025-10-06