

Location: \_\_\_\_\_




**MH-501-28**

**SIPHONIC ROOF DRAIN  
OVERFLOW**

**Specification:** MIFAB® / Hydromax Series MH-501-28 stainless steel siphonic roof drain with small anchor flange for gutter installation, ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware.

**Function:** Used in any type of roofs as a siphonic roof drain overflow system. The siphonic overflow roof drain is designed to accept water once the main siphonic roof drain is clogged or overwhelmed.

Type 304 Stainless Steel  
Allen Key hardware

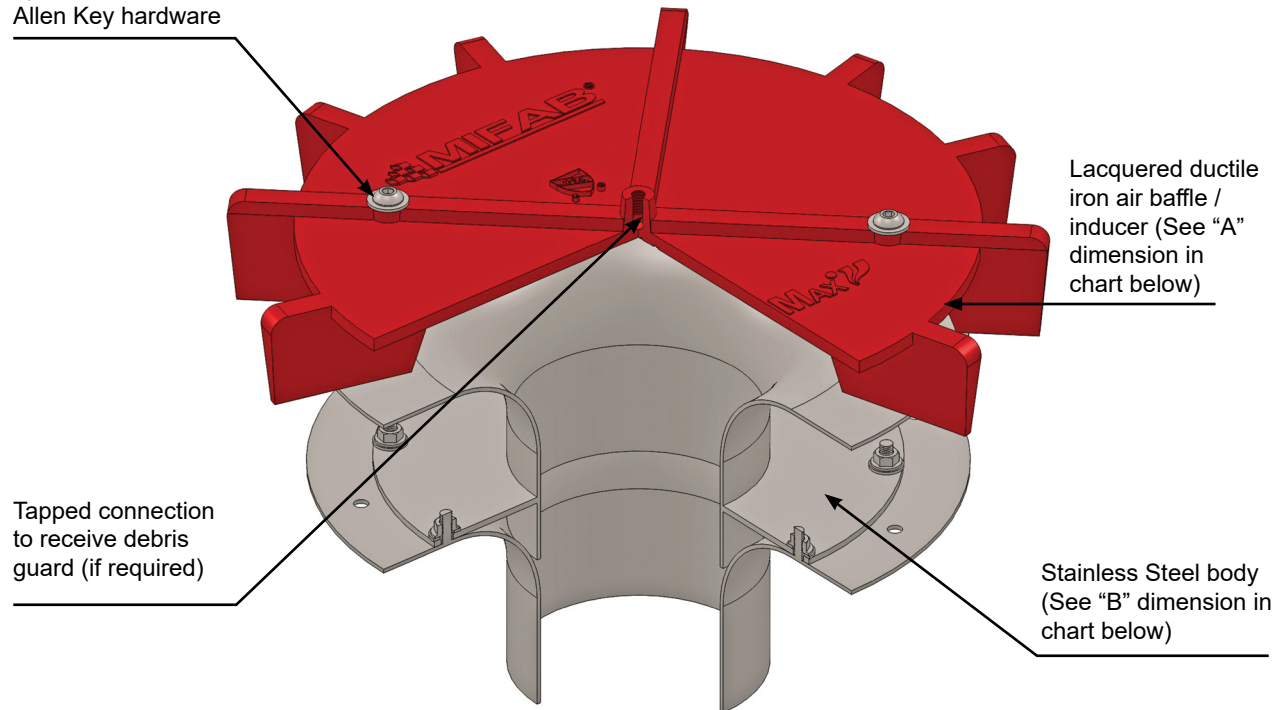

Lacquered ductile  
iron air baffle /  
inducer (See "A"  
dimension in  
chart below)

Tapped connection  
to receive debris  
guard (if required)

Stainless Steel body  
(See "B" dimension in  
chart below)

MH-501-28 will meet ANSI / ASME A112.6.9 Siphonic Roof Drain Standard.

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION			
			Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-501-28	5" (125)	4 3/8" (110)	120.00	1,300.00	14.62" (371.45)	11.8" (300)

SUFFIX	OPTIONAL VARIATIONS:
-BA	Minimum 51% material cost made in the USA
-G	Stainless steel ballast guard
-M	Debris Guard
-PA	Pennsylvania Steel Act compliant product

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contract: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_

MIFAB® reserves the right to make changes in material and design without formal notice or obligation.

USA: 1-800-465-2736 [www.mifab.com](http://www.mifab.com) CAN: 1-800-387-3880