

Location: _____




MHY-30

**MODERATE CLIMATE EXPOSED
WALL HYDRANT**

Specification: MIFAB® Series MHY-30 exposed type, self draining, moderate climate low lead wall hydrant with A.S.S.E. 1011 certified anti-siphon and vandal resistant integral vacuum breaker with 3/4" (19) male hose connection. Hydrant assembly complete with one piece neoprene plunger to control the flow function, hardened bronze operating stem, heavy duty chrome plated bronze head casting and polished chrome plated face plate. Operating key to be furnished with each hydrant.

Function: Designed to blend in with commercial applications such as office buildings, apartment complexes, malls and shopping centers, schools, churches and industrial buildings.

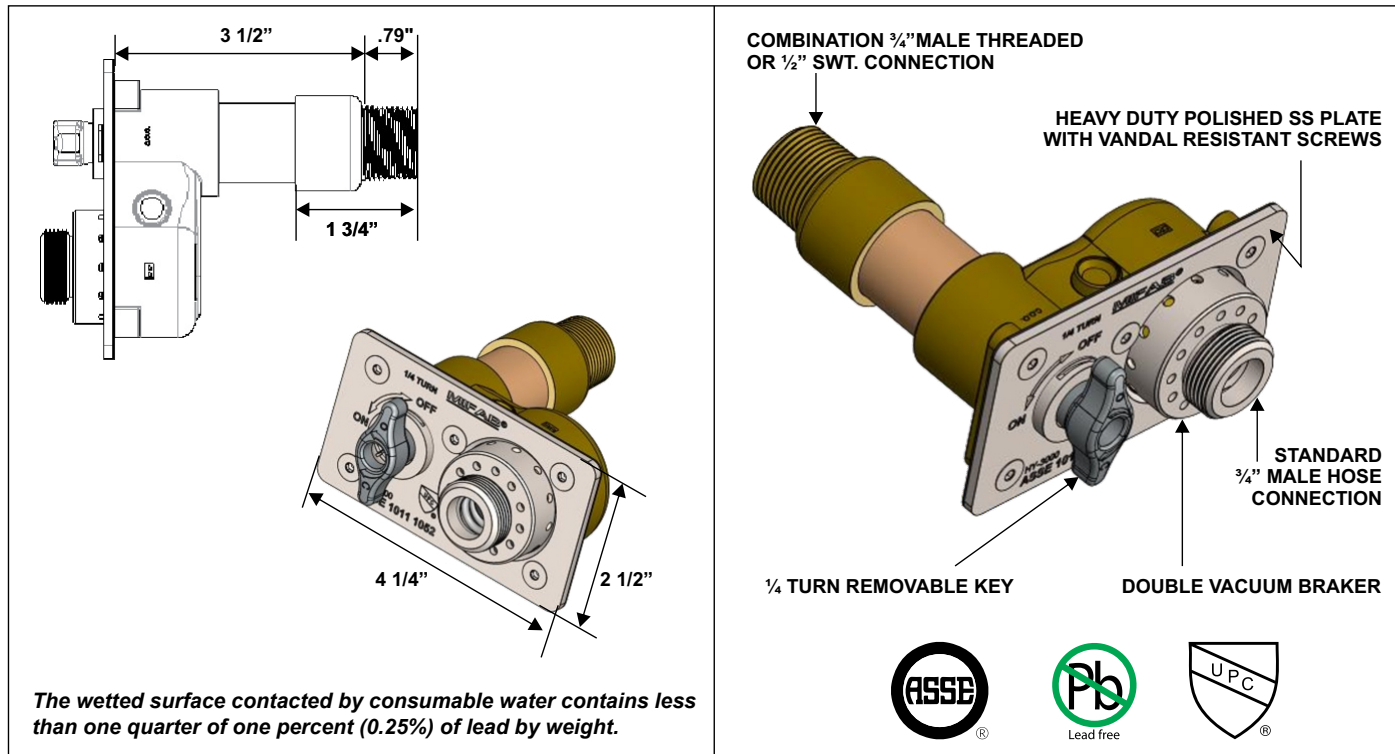

The wetted surface contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

MODEL NO.	DESCRIPTION	WEIGHT		WALL THICKNESS		OVER LENGTH		SWIVEL INLET CONNECTION
		Lbs.	Kgs.	IN	MM	IN	MM	IN
MHY-30	4 1/2" Overall Length	3	1.36	3 1/2"	114	3 1/2"	114	3/4" Female, 1" Male IPS combination

FEATURES:

- **INTERNAL COMPONENTS** - hardened bronze operating stem and one piece neoprene plunger.
- **VACUUM BREAKER** - unique self draining vandal resistant integral vacuum breaker protects from anti-siphon conditions.
- **FACE PLATE** - polished chrome plated.
- **APPROVALS** - MHY-30 Series wall hydrant is tested listed with I.A.P.M.O. and is manufactured with an anti-siphon vacuum breaker that is tested and certified to the A.S.S.E. Standard 1011.

SUFFIX	OPTIONAL VARIATIONS
MHY-CIA-30/50	Hydrant Repair Kit
-0	1" Hose Connection (HY-HC1)
-WC	Wall Clamp (HY-H01)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____