

Location: _____




MHY-59

NON FREEZE ROOF HYDRANT

Specification: MIFAB® Series MHY-59 non freeze roof hydrant with 3/4" male hose connection, heavy duty cast iron head casting and lift handle with lock feature and combination 3/4" (19) female and 1" (25) male inlet connection. Hydrant assembly complete with epoxy coated steel mounting flange and membrane clamp and hardened bronze operating stem. Double check backflow preventer is tested and certified to the ASSE 1052 Standard and the MHY-59 is tested and certified to the ASSE 1057 Standard.

Function: The MHY-59 sanitary roof hydrant is designed for irrigation purposes and to provide water, in any weather condition, on commercial building roofs. Applications include green roofs, window washing, cleaning of condenser coils, cooling towers and other types of roof top equipment. The MHY-59 is backflow protected with a field testable ASSE 1052 double check backflow preventer.

The MHY-59 does not require 1) a drain line from the valve body located inside the building or 2) the removal of the double check backflow preventer or use of a diverter to protect from freezing. Refer to Operating instructions for operational details. The hydrant can be repaired from the top. No need to remove the installed hydrant to repair it.

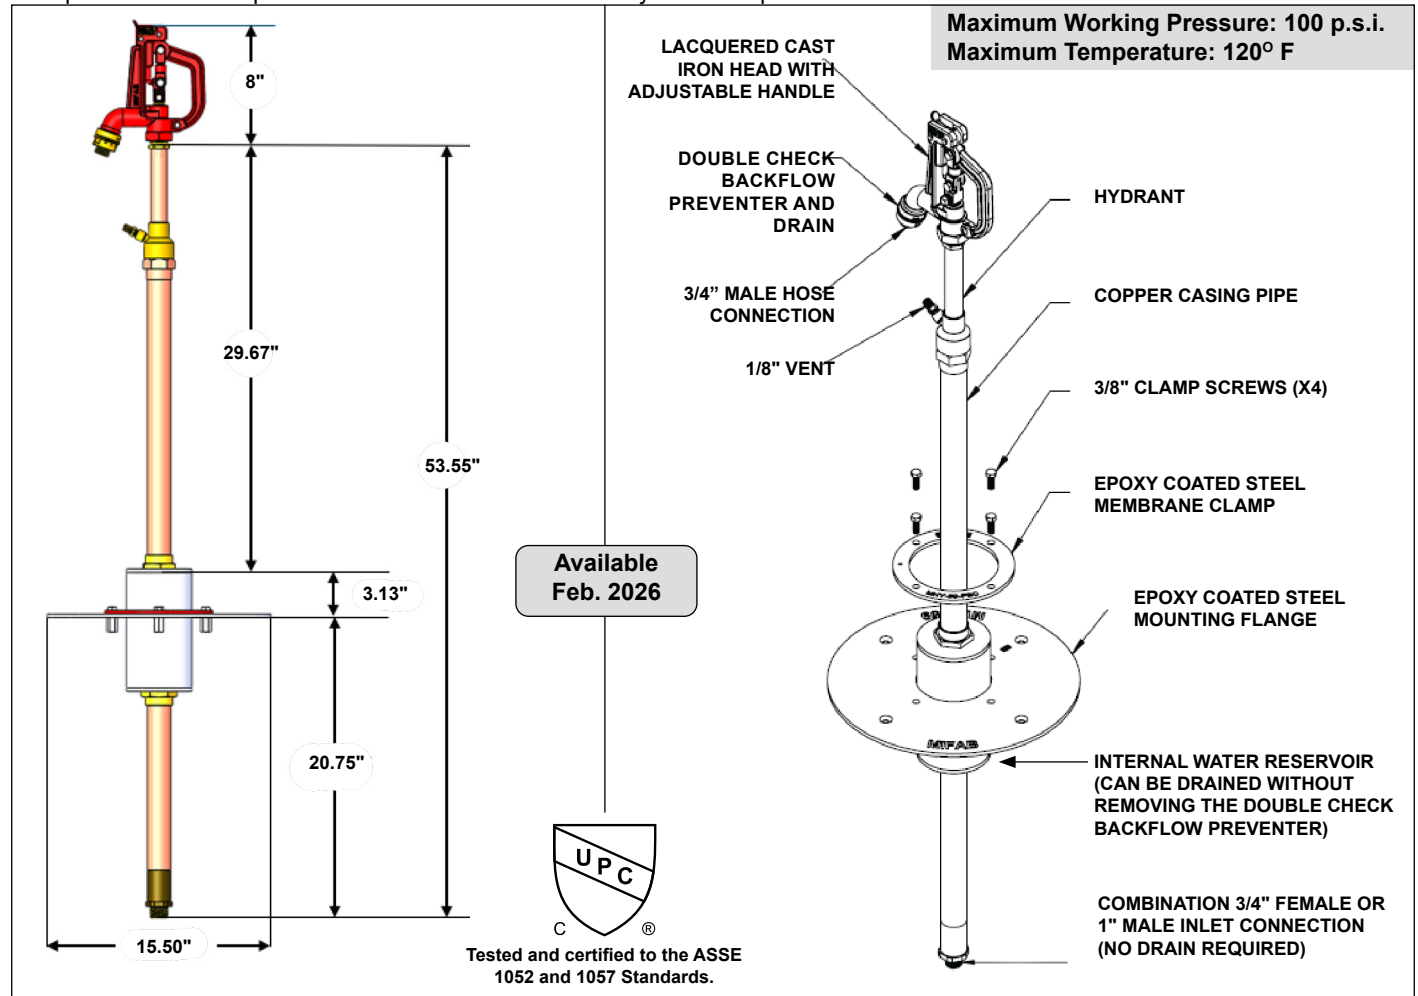

SUFFIX	OPTIONAL VARIATIONS
-BA	Minimum 51% material cost made in the USA
-PA	Pennsylvania Steel Act compliant product
-0	1" (25) Hose connection
-8	3/4" Adapter Vacuum Breaker
-42	Decorative casing guard

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____