

Location: _____




MI-SOLID-S-30

**POINT OF USE UNDER SINK
NEUTRALIZATION TANKS**

Specification: MI-SOLID-S-30 to be manufactured out of heavy-duty HDPE material with inside media bucket, adjustable 1" FPT Inlet with adjustable polypropylene tailpiece, two bafflers and 2" FPT outlet. Cartridge will have 1.5 gallons liquid capacity. Unit to have 1.5 gallons of usable capacity and be capable of handling up to 8 GPM.

Function: Under sink installation with adjustable tailpiece to thread directly to sink strainer. Each system is capable of handling up to 8gpm. HDPE molded heavy duty body with 1.5 gallons liquid capacity. Option for use as under sink solids interceptor with existing side inlet.

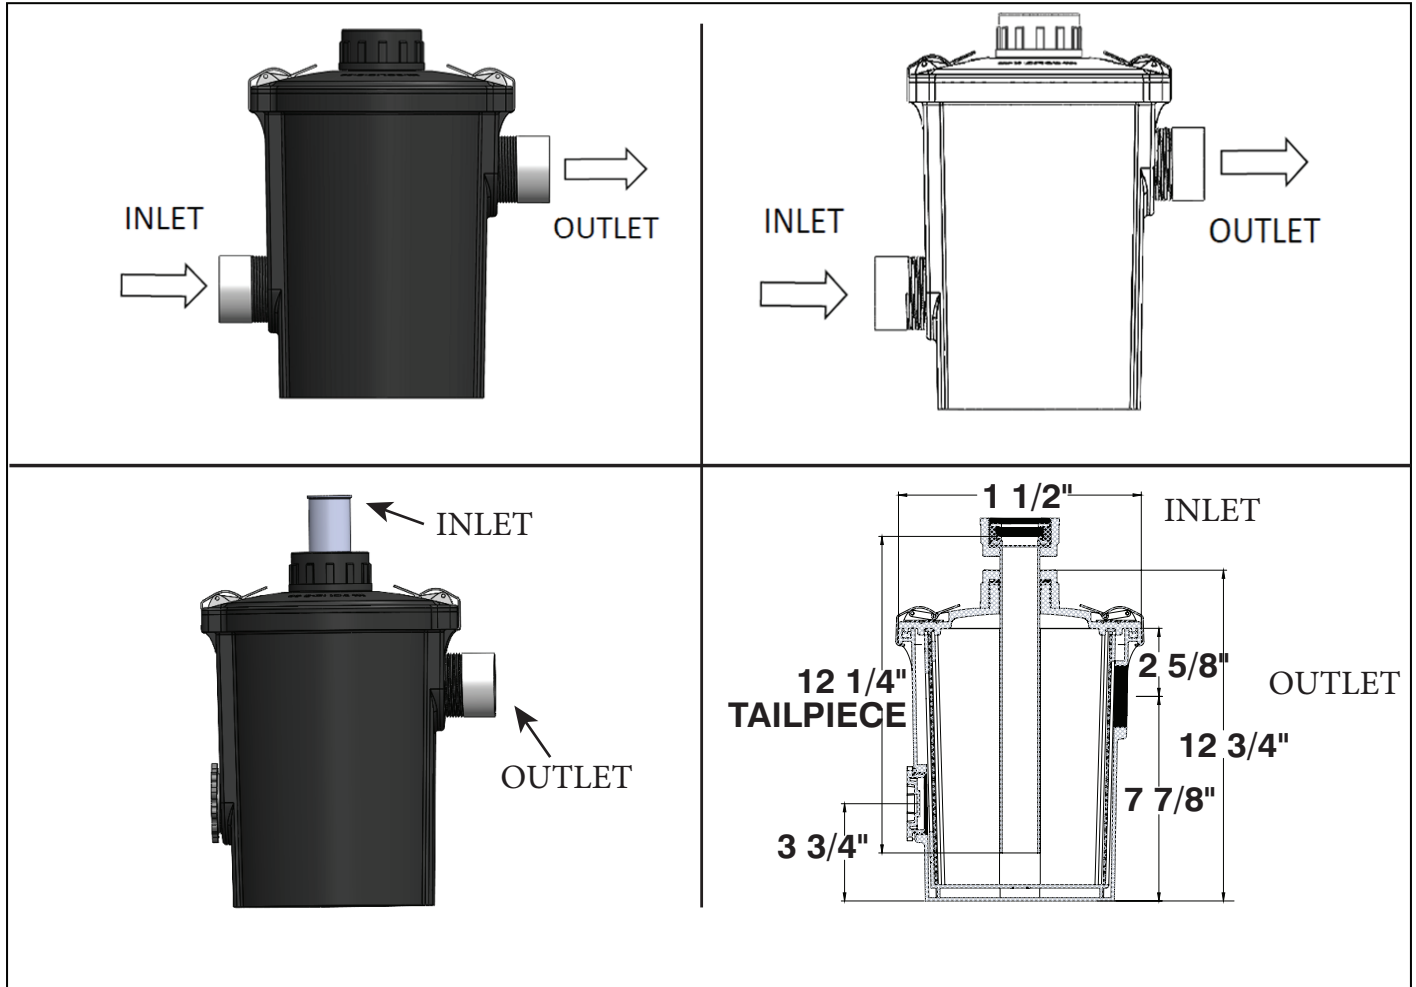

PART NO.

MI-SOLID-S-30

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____