

Location: \_\_\_\_\_



**P6220-ELTD-WW**

**12" Wide, 10" Internal Width, Stainless Steel Elevator Trench Drain with Wedgewire Grate**

**SPECIFICATION:**

MIFAB® Series P6220-ELTD-WW Elevator Trench Drain, 12" wide, 10" internal width, 11 gauge fabricated Type 304 stainless steel channels (conforming to ASTM A-240) and Load Class "B" stainless steel Wedgewire grates per DIN EN 1433 and up to 4,999 lbs.per ASME A112.6.3 with vandal proof lockdowns and bead blasted finish. Grates meet ADA and heel-proof requirements. Grate free area (grate intake) of 28 square inches per 1' section. Channels available in either 36", 43" or 96" lengths. Center outlets are standard in 4" no hub connections and fabricated as part of the trench drain system. 6" no hub outlet is available as an option. IAPMO tested and certified to a 100 GPM flow rate.

**FUNCTION:**

Used in Fire Service Access Elevators. Prevents water used to extinguish fires from entering the elevator shaft, protecting emergency personnel with egress and staging requirements. Installed in front of elevator door or elevator bank. ADA compliant, heel-proof grating construction meets City of San Francisco SFFC Code, Section 511.1 and California State Building Code sections 403.6.1, 403.6.2, 3007.4 and 3008.4. Load Class B Wedgewire grates provide additional strength.


LENGTH

SCAN ME

SECTION A-A

**Minimum length required to meet a 100 GPM flow rate is 36" and maximum length to meet a 100 GPM flow rate is 96".**

**3<sup>rd</sup> Party IAPMO tested to 100 GPM Flow Rate (IAPMO report #321-19178)**

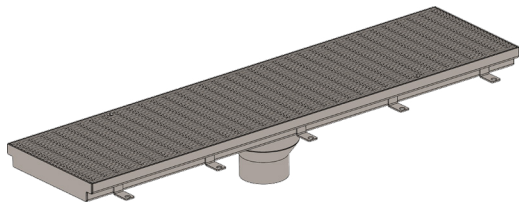

ANSI A112.21.1M Light Duty Load Rated - up to 2,000 Lbs.

MODEL NUMBER	DESCRIPTION	WEIGHT Lbs.
P6220-ELTD-WW-36	12" wide, 11 gauge Type 304 S.S., 36" long elevator drain with Load Class B Wedgewire grate.	26
P6220-ELTD-WW-43	12" wide, 11 gauge Type 304 S.S., 43" long elevator drain with Load Class B Wedgewire grate.	30
P6220-ELTD-WW-96	12" wide, 11 gauge Type 304 S.S., 96" long elevator drain with Load Class B Wedgewire grate.	60

SUFFIX	OPTIONAL VARIATIONS
-6NH	6" No hub outlet connection
-7	1/2" Trap Seal Primer connection
-29	Type 316 Stainless Steel
-FLC	Anchor (waterproofing) flange and membrane clamp
-PC	Powder coated, (one color choice)
-PC2	Powder coated, (two tone color choice)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_

Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_