

Location: \_\_\_\_\_




# P6480-THTD


# 8" Wide Stainless Steel Threshold Drain

**Specification:** MIFAB® Series P6460-THTD / P6480-THTD Threshold Trench Drain, 8" wide, 11 gauge fabricated Type 304 stainless steel channels (conforming to ASTM A-240) and Load Class "B" stainless steel non-slip Wedgewire grates per DIN EN 1433 with vandal proof lockdowns and bead blasted finish. Grates meet ADA and heel-proof requirements. Channels available in either 36", 48", 60", 72", 96" or 108" lengths. Center outlets are standard in 4" no hub connections and fabricated as part of the trench drain system. 6" no hub outlet is available as an option.


**Function:** Used in Fire Service Access Elevators. Prevents water used to extinguish fires from entering the elevator shaft, protecting emergency personnel with egress and staging requirements. Installed in front of elevator door or elevator bank.

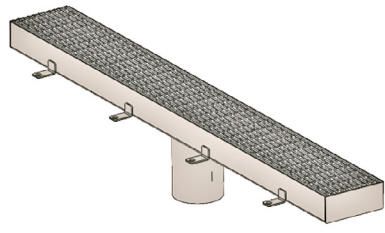


**Illustrated with Wedgewire grate**




SCAN ME




**P6460-THTD cross section**




**P6480-THTD cross section**




**Wedgewire grate (Standard)**



**Wedgewire grate cross section view**



**-FS - Fabricated slotted grate**



**-AS - Fabricated angle slotted grate**

**Note:** The neoprene gasket used to connect long runs of trench drain channels is not recommended for use with caustic or harsh chemicals. In these cases, it is recommended that the trench drain channels be welded on site.

MODEL NUMBER	DESCRIPTION	GRATE FREE AREA (Sq. In.)	WEIGHT Lbs.
<b>P6480-THTD-36</b>	8" wide, 36" long, Wedgewire grate	195	30
<b>P6480-THTD-48</b>	8" wide, 48" long, Wedgewire grate	228	38
<b>P6480-THTD-60</b>	8" wide, 60" long, Wedgewire grate	285	48
<b>P6480-THTD-72</b>	8" wide, 72" long, Wedgewire grate	342	62
<b>P6480-THTD-96</b>	8" wide, 96" long, Wedgewire grate	457	79
<b>P6480-THTD-108</b>	8" wide, 108" long, Wedgewire grate	514	85

**NOTE:** Other widths are available. Contact MIFAB® for details

SUFFIX	OPTIONAL VARIATIONS
<b>-6NH</b>	6" No hub outlet connection
<b>-7</b>	1/2" Trap Seal Primer connection
<b>-7MG</b>	MI-GARD Trap Seal Protection device (4" or 6")
<b>-29</b>	Type 316 Stainless Steel
<b>-FLC</b>	Anchor (waterproofing) flange and membrane clamp
<b>-PC</b>	Powder coated, (one color choice)
<b>-PC2</b>	Powder coated, (two tone color choice)

SUFFIX	OPTIONAL GRATES
<b>-AS</b>	Fabricated, Type 304 Stainless Steel angle slotted, heel-proof and ADA compliant grate, Load Class A
<b>-FS</b>	Fabricated, Type 304 Stainless Steel slotted, heel-proof and ADA compliant grate, Load Class A

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_