

POG-TP

P-TRAP GASKETS



Specification: MIFAB® MI-POG-TP Series of neoprene rubber gaskets to connect p-traps to the waste (DWV) line.. Tested and certified to the ASTM Standard C564-2020.

Function: Neoprene rubber gaskets are used to connect different sizes and material types of p-traps to the DWV waste line adjacent to the sink. Large labor savings are attained by not having to make a mechanical connection to the waste line.



POG-TP-1
1 1/2" PVC Waste (DWV)
Line to 1 1/2" Tubular



POG-TP-2
2" Copper Waste (DWV) Line to 1 1/2" Tubular. Also works with 2" PVC Waste (DWV) Line to 1 1/2" Tubular




POG-TP-3 1 1/2" PVC Waste (DWV) Line to 1 1/4" Tubular



POG-TP-4
1 1/2" Copper Waste (DWV)
to 1 1/4" Tubular

MODEL NUMBER	DESCRIPTION
POG-TP-1	Connects 1 1/2" PVC Waste Line (DWV) to 1 1/2" Tubular P-Trap.
POG-TP-2	Connects 2" Copper Waste Line (DWV) to 1 1/2" Tubular P-Trap; also connects with 2" PVC Waste Line to 1 1/2" Tubular P-Trap.
POG-TP-3	Connects 1 1/2" PVC Waste Line (DWV) to 1 1/4" Tubular P-Trap.
POG-TP-4	Connects 1 1/2" Copper Waste Line (DWV) to 1 1/4" Tubular P-Trap.

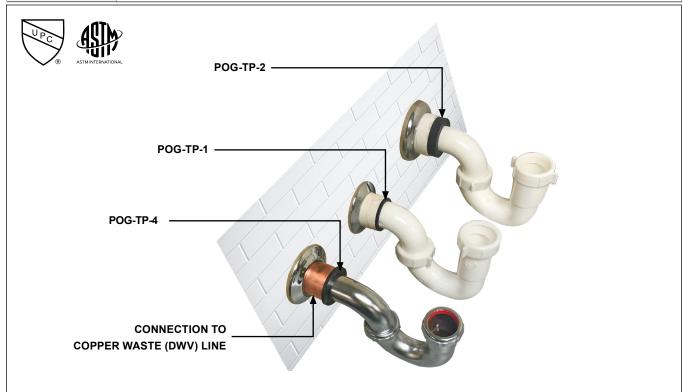

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.		
Job Name:	Page No:	
Section No:	Contractor:	
Schedule No:	Purchase Order No:	