

Location: _____




R1150-M-2.75H

**CAST IRON COMBINED ROOF DRAIN WITH LOW PROFILE
ALUMINUM DOMES AND OVERFLOW STANDPIPE**

Specification: MIFAB® Series R1150-M-2.75 combined roof drain and secondary overflow system, consisting of one piece lacquered cast iron drain body with integral sump receiver, cast iron waterproofing membrane clamp rings with integral gravel stops, one 2 1/2" (64) high fixed integral cast iron overflow standpipe and two self-locking aluminum low profile dome strainers with a free area of 20 square inches each and 2 1/2" (64) in height.

Function: Used in promenade areas underneath pavers where space is limited. Dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

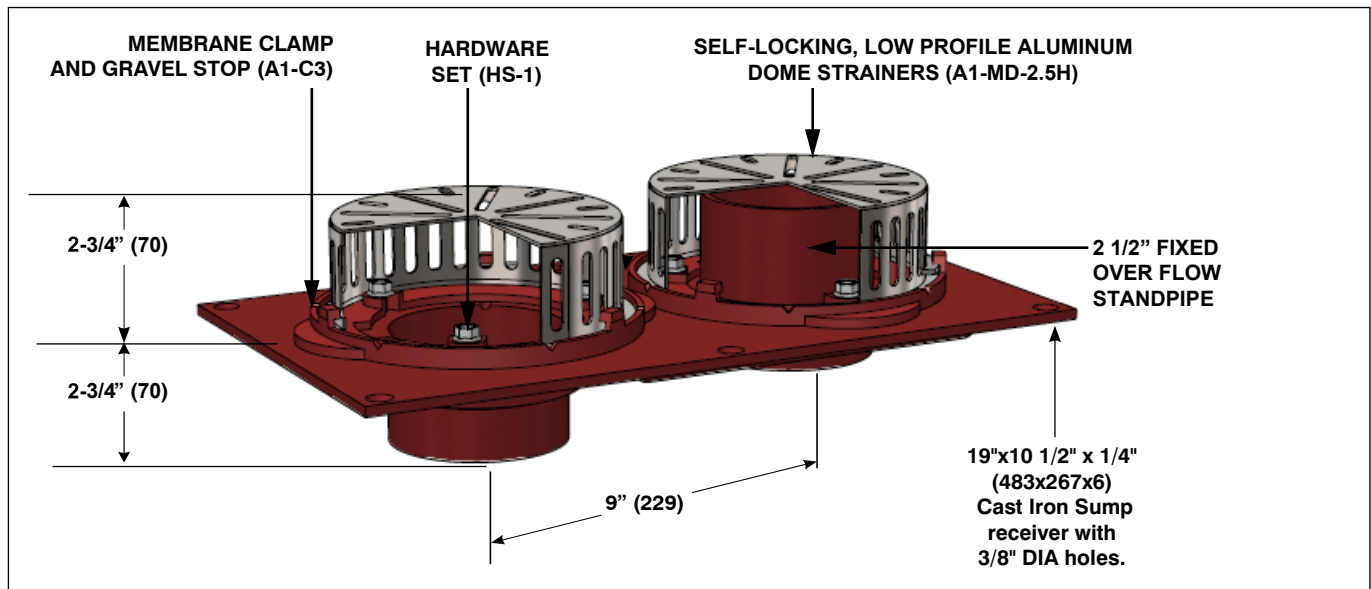

MODEL NO.	Outlet Size	Outlet Type	Body Height
R1152-M-2.75H	2" NH	No Hub	2 3/4" (70)
R1153-M-2.75H	3" NH	No Hub	2 3/4" (70)
R1154-M-2.75H	4" NH	No Hub	2 3/4" (70)

Suffix	Description
-6	Vandal proof domes (metal domes only)
-11	Acid resistant epoxy coating body, clamp, and dome
-12	Galvanized metal domes
-12A	Galvanized bodies, and membrane clamps
-13	Galvanized bodies, membrane clamps and domes
-83	Stainless steel mesh screen over domes
-BA	Minimum 51% material cost made in the USA
-G	Stainless steel ballast guards
-PA	Pennsylvania Steel Act compliant product
-W-1	Water proofing flange
-XJ	Vertical expansion joint (see R1900)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____