

Location: _____



R1200-R-RG




LARGE SUMP ROOF DRAIN WITH 2" HIGH EXTERNAL WATER DAM AND 19" DIAMETER CAST IRON ROOFGUARD

Specification: MIFAB® Series R1200-R-RG lacquered cast iron deep sump roof drain with 15" diameter anchor flange, 2" high, cast iron external combined water dam and waterproofing membrane clamp ring and 12.25" diameter cast iron RoofGuard dome strainer with horizontal and perimeter drainage slots to prevent clogging of the roof dome.



Function: Used in flat roofs where a constant height of water is required. Also used as an emergency overflow, draining water when the depth of water on the roof exceeds the water dam height. Patented design significantly increases the surface area making the drain virtually uncloggable. The greatly increased surface area and perimeter drainage eliminates leaks and standing water on the roof.

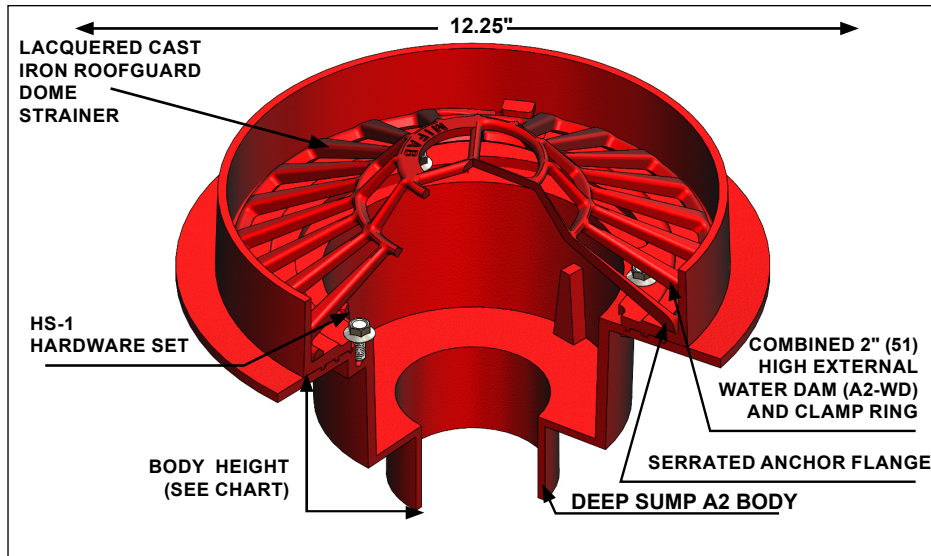

PARTS	
CAST IRON ROOFGUARD	
HS-1 HARDWARE	
A2-WD	
A2 BODY	

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
2" (51)	5 3/4" (146)	5 1/2" (140)	6 1/2" (165)	6 1/2" (165)	6 3/4" (171)
3" (76)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 1/2" (165)	7 1/2" (191)
4" (102)	5 3/4" (146)	5 1/2" (140)	5 1/2" (140)	6 1/2" (165)	7 5/8" (194)
5" (127)	5 3/4" (146)	—	6 5/8" (168)	6 3/4" (171)	—
6" (152)	7 1/4" (184)	5 5/8" (143)	5 5/8" (143)	6 1/2" (165)	—
8" (203)	5 7/8" (149)	—	—	(See note *)	—

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome (metal dome only) (T-20 Torx & pin)	-90	Threaded side outlet (2", 3", 4", 6")	-U	Underdeck clamp
-11	Acid resistant epoxy coating	-90NH	No Hub side outlet (cast iron only) (2", 3", 4") (Standard) No hub outlet	-U3	Underdeck clamp with cutaway side
-12	Galvanized metal dome	-B	Sump receiver	-V	Fixed Static Extension 2", 3", 4"
-12A	Galvanized body and membrane clamp	-BA	Minimum 51% material cost made in the USA	-VG	Galvanized fixed extension (2", 3", 4")
-12B	Galvanized metal dome and membrane clamp	-E	Adjustable extension	-W-1	Water proofing flange
-13	Galvanized body, membrane clamp and dome	-EG	Galvanized Adjustable extension	-W1	Water proofing flange (A8-W-1)
-28	Stainless steel body (Type 304) (2", 3", 4")	P	Push on outlet	X	Inside caulk outlet
-30	PVC socket connection body (2", 3" 4")	-PA	Pennsylvania Steel Act compliant product	-XJ	Vertical expansion joint (see R1900)
-31	ABS socket connection body (2", 3" 4")	T	Threaded outlet (except 8")	-Z	Extended wide elastomeric flange
-83	Stainless steel mesh screen over metal dome				

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____