

Location: _____




R1200-Z

LARGE SUMP DEXOTEX ROOF DRAIN WITH WIDE DECK FLANGE FOR A LIQUID MEMBRANE ROOF

Specification: MIFAB® Series R1200-Z lacquered cast iron deep sump roof drain with 20" diameter anchor flange, large cast iron waterproofing membrane clamp ring with integral gravel stop, and standard self-locking polyethylene dome strainer with a free area of 125 square inches.

Function: Used in flat roofs and decks designed for promenade or recreational areas where traffic bearing roof deck covering is used. Large free area dome provides for efficient drainage of rainwater and prevents debris from entering the drain line. Extra wide anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

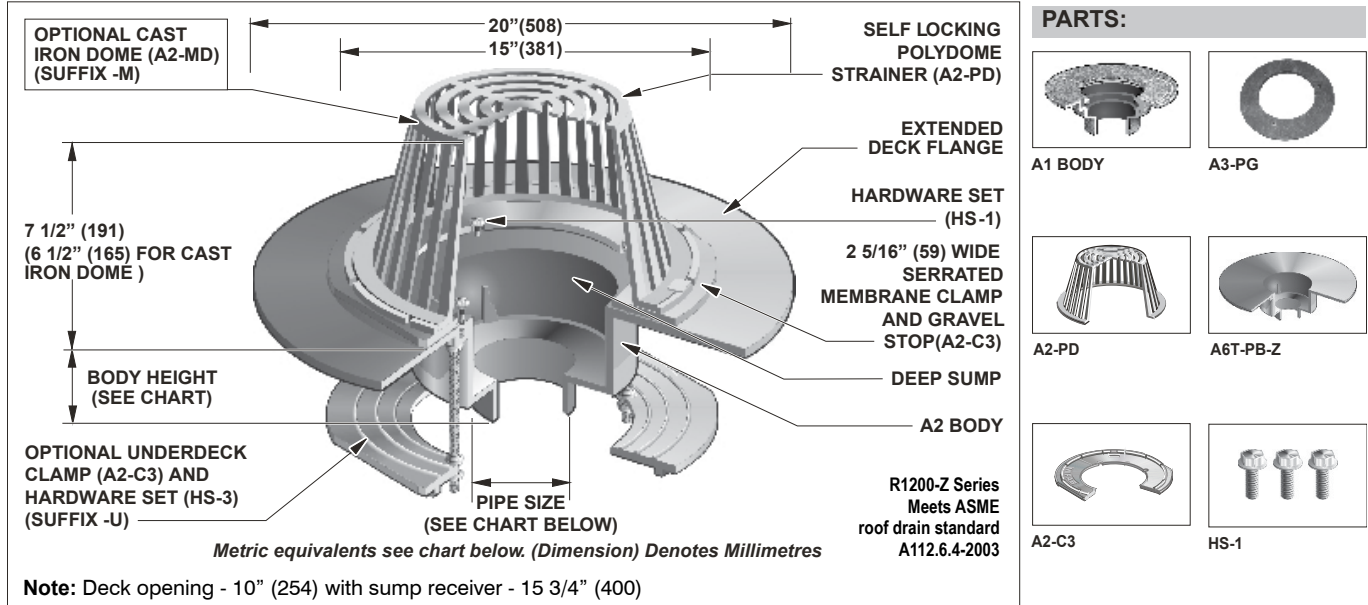

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	5 3/4" (146)	5 1/2" (140)	6 1/2" (165)	6 1/2" (165)	6 3/4" (171)
3" (76)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 1/2" (165)	7 1/2" (191)
4" (102)	5 3/4" (146)	5 1/2" (140)	5 1/2" (140)	6 1/2" (165)	7 5/8" (194)
5" (127)	5 3/4" (146)	5 1/2" (140)	6 5/8" (168)	6 3/4" (171)	-
6" (152)	7 1/4" (184)	5 5/8" (143)	5 5/8" (143)	6 1/2" (165)	-
8" (203)	5 7/8" (149)	N/A	N/A	(A7-8X body)	-

SUFFIX	OPTIONAL VARIATIONS	SUFFIX	OPTIONAL VARIATIONS
-6	Vandal proof dome (metal dome only)	-HC	Adjustable ballast guard with sec. clamp
-11	Acid resistant epoxy coating	-JC	S.S. ballast guard with secondary clamp
-12	Galvanized metal dome	-M	Metal dome
-12A	Galvanized body and membrane clamp	-M-80	Low profile silhouette aluminum dome
-12B	Galvanized metal dome and membrane clamp	P	Push on outlet
-13	Galvanized body, membrane clamp and dome	-PA	Pennsylvania Steel Act compliant product
-28	Stainless steel body (Type 304) (2", 3", 4")	-R	2" external water dam
-30	PVC socket connection body	-RG	RoofGuard non clogging cast iron dome
-31	ABS socket connection body	T	Threaded outlet (2", 3", 4")
-81	Rough bronze dome	-U	Underdeck clamp
-83	Stainless steel mesh screen over dome	-U3	Underdeck clamp with cutaway side
-90	Threaded side outlet (2", 3", 4")	-V	Fixed Static Extension 2", 3", 4"
-90-NH	No Hub side outlet (cast iron only) (2", 3", 4")	-VG	Galvanized fixed extension (2", 3", 4")
(Standard)	No hub outlet	-W	Adjustable water dam
-B	Sump receiver	-W-1	Water proofing flange
-BA	Buy America Act compliant product	-W1	Water proofing flange (A8-W-1)
-C	Secondary clamp	-W2	2" internal water dam
-E	Adjustable extension	-W3	3" internal water dam
-EG	Galvanized Adjustable extension	-W4	4" internal water dam
-F1, -F2, -F3	Accuflow (parabolic weir) specify	-W6	6" diameter adjustable water dam
-G	Stainless steel ballast guard	X	Inside caulk outlet (2", 3", 4")
		-XJ	Vertical expansion joint (see R1900)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____